

xapian-core Reference Manual

1.0.22

Generated by Doxygen 1.5.2

Sun Oct 3 14:14:14 2010

Contents

1	xapian-core Namespace Index	1
1.1	xapian-core Namespace List	1
2	xapian-core Hierarchical Index	3
2.1	xapian-core Class Hierarchy	3
3	xapian-core Class Index	5
3.1	xapian-core Class List	5
4	xapian-core File Index	9
4.1	xapian-core File List	9
5	xapian-core Page Index	11
5.1	xapian-core Related Pages	11
6	xapian-core Namespace Documentation	13
6.1	Xapian Namespace Reference	13
6.2	Xapian::Auto Namespace Reference	27
6.3	Xapian::Flint Namespace Reference	28
6.4	Xapian::InMemory Namespace Reference	30
6.5	Xapian::Quartz Namespace Reference	31
6.6	Xapian::Remote Namespace Reference	33
6.7	Xapian::Unicode Namespace Reference	36
7	xapian-core Class Documentation	39
7.1	Xapian::AssertionError Class Reference	39
7.2	Xapian::BM25Weight Class Reference	41
7.3	Xapian::BoolWeight Class Reference	45

7.4	Xapian::Database Class Reference	48
7.5	Xapian::DatabaseCorruptError Class Reference	58
7.6	Xapian::DatabaseCreateError Class Reference	60
7.7	Xapian::DatabaseError Class Reference	62
7.8	Xapian::DatabaseLockError Class Reference	64
7.9	Xapian::DatabaseModifiedError Class Reference	66
7.10	Xapian::DatabaseOpeningError Class Reference	68
7.11	Xapian::DatabaseVersionError Class Reference	70
7.12	Xapian::DateValueRangeProcessor Class Reference	72
7.13	Xapian::DocNotFoundError Class Reference	74
7.14	Xapian::Document Class Reference	75
7.15	Xapian::Enquire Class Reference	81
7.16	Xapian::Error Class Reference	94
7.17	Xapian::ErrorHandler Class Reference	96
7.18	Xapian::ESet Class Reference	98
7.19	Xapian::ESetIterator Class Reference	101
7.20	Xapian::ExpandDecider Class Reference	105
7.21	Xapian::ExpandDeciderAnd Class Reference	106
7.22	Xapian::ExpandDeciderFilterTerms Class Reference	108
7.23	Xapian::FeatureUnavailableError Class Reference	110
7.24	Xapian::InternalError Class Reference	112
7.25	Xapian::InvalidArgumentError Class Reference	113
7.26	Xapian::InvalidOperationError Class Reference	114
7.27	Xapian::LogicError Class Reference	115
7.28	Xapian::MatchDecider Class Reference	116
7.29	Xapian::MSet Class Reference	117
7.30	Xapian::MSetIterator Class Reference	125
7.31	Xapian::MultiValueSorter Class Reference	130
7.32	Xapian::NetworkError Class Reference	131
7.33	Xapian::NetworkTimeoutError Class Reference	133
7.34	Xapian::NumberValueRangeProcessor Class Reference	135
7.35	Xapian::PositionIterator Class Reference	137
7.36	Xapian::PostingIterator Class Reference	139
7.37	Xapian::Query Class Reference	143

7.38	Xapian::QueryParser Class Reference	149
7.39	Xapian::QueryParserError Class Reference	157
7.40	Xapian::RangeError Class Reference	158
7.41	Xapian::RSet Class Reference	159
7.42	Xapian::RuntimeError Class Reference	162
7.43	Xapian::SimpleStopper Class Reference	163
7.44	Xapian::Sorter Class Reference	165
7.45	Xapian::Stem Class Reference	166
7.46	Xapian::Stopper Class Reference	169
7.47	Xapian::StringValueRangeProcessor Class Reference	171
7.48	Xapian::TermGenerator Class Reference	173
7.49	Xapian::TermIterator Class Reference	178
7.50	Xapian::TradWeight Class Reference	182
7.51	Xapian::UnimplementedError Class Reference	186
7.52	Xapian::Utf8Iterator Class Reference	187
7.53	Xapian::ValueIterator Class Reference	192
7.54	Xapian::ValueRangeProcessor Struct Reference	196
7.55	Xapian::Weight Class Reference	197
7.56	Xapian::WritableDatabase Class Reference	201
8	xapian-core File Documentation	213
8.1	xapian/error.h File Reference	213
8.2	xapian/version.h File Reference	215
8.3	xapian.h File Reference	217
8.4	xapian/database.h File Reference	218
8.5	xapian/dbfactory.h File Reference	219
8.6	xapian/document.h File Reference	221
8.7	xapian/enquire.h File Reference	222
8.8	xapian/errorhandler.h File Reference	224
8.9	xapian/expanddecider.h File Reference	225
8.10	xapian/positioniterator.h File Reference	226
8.11	xapian/postingiterator.h File Reference	227
8.12	xapian/query.h File Reference	228
8.13	xapian/queryparser.h File Reference	229

8.14	xapian/sorter.h File Reference	230
8.15	xapian/stem.h File Reference	231
8.16	xapian/termgenerator.h File Reference	232
8.17	xapian/termiterator.h File Reference	233
8.18	xapian/types.h File Reference	234
8.19	xapian/unicode.h File Reference	236
8.20	xapian/valueiterator.h File Reference	238
9	xapian-core Page Documentation	239
9.1	Deprecated List	239

Chapter 1

xapian-core Namespace Index

1.1 xapian-core Namespace List

Here is a list of all documented namespaces with brief descriptions:

Xapian (The Xapian namespace contains public interfaces for the Xapian library)	13
Xapian::Auto (Database factory functions which determine the database type automatically)	27
Xapian::Flint (Database factory functions for the flint backend)	28
Xapian::InMemory (Database factory functions for the inmemory backend) .	30
Xapian::Quartz (Database factory functions for the quartz backend)	31
Xapian::Remote (Database factory functions for the remote backend)	33
Xapian::Unicode (Functions associated with handling Unicode characters) .	36

Chapter 2

xapian-core Hierarchical Index

2.1 xapian-core Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Xapian::Database	48
Xapian::WritableDatabase	201
Xapian::Document	75
Xapian::Enquire	81
Xapian::Error	94
Xapian::LogicError	115
Xapian::AssertionError	39
Xapian::InvalidArgumentError	113
Xapian::InvalidOperationError	114
Xapian::UnimplementedError	186
Xapian::RuntimeError	162
Xapian::DatabaseError	62
Xapian::DatabaseCorruptError	58
Xapian::DatabaseCreateError	60
Xapian::DatabaseLockError	64
Xapian::DatabaseModifiedError	66
Xapian::DatabaseOpeningError	68
Xapian::DatabaseVersionError	70
Xapian::DocNotFoundError	74
Xapian::FeatureUnavailableError	110
Xapian::InternalError	112
Xapian::NetworkError	131
Xapian::NetworkTimeoutError	133
Xapian::QueryParserError	157
Xapian::RangeError	158
Xapian::ErrorHandler	96
Xapian::ESet	98
Xapian::ESetIterator	101

Xapian::ExpandDecider	105
Xapian::ExpandDeciderAnd	106
Xapian::ExpandDeciderFilterTerms	108
Xapian::MatchDecider	116
Xapian::MSet	117
Xapian::MSetIterator	125
Xapian::PositionIterator	137
Xapian::PostingIterator	139
Xapian::Query	143
Xapian::QueryParser	149
Xapian::RSet	159
Xapian::Sorter	165
Xapian::MultiValueSorter	130
Xapian::Stem	166
Xapian::Stopper	169
Xapian::SimpleStopper	163
Xapian::TermGenerator	173
Xapian::TermIterator	178
Xapian::Utf8Iterator	187
Xapian::ValueIterator	192
Xapian::ValueRangeProcessor	196
Xapian::DateValueRangeProcessor	72
Xapian::NumberValueRangeProcessor	135
Xapian::StringValueRangeProcessor	171
Xapian::Weight	197
Xapian::BM25Weight	41
Xapian::BoolWeight	45
Xapian::TradWeight	182

Chapter 3

xapian-core Class Index

3.1 xapian-core Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Xapian::AssertionError (AssertionError is thrown if a logical assertion inside Xapian fails)	39
Xapian::BM25Weight (BM25 weighting scheme)	41
Xapian::BoolWeight (Boolean weighting scheme (everything gets 0))	45
Xapian::Database (This class is used to access a database, or a group of databases)	48
Xapian::DatabaseCorruptError (DatabaseCorruptError indicates database corruption was detected)	58
Xapian::DatabaseCreateError (DatabaseCreateError indicates a failure to create a database)	60
Xapian::DatabaseError (DatabaseError indicates some sort of database related error)	62
Xapian::DatabaseLockError (DatabaseLockError indicates failure to lock a database)	64
Xapian::DatabaseModifiedError (DatabaseModifiedError indicates a database was modified)	66
Xapian::DatabaseOpeningError (DatabaseOpeningError indicates failure to open a database)	68
Xapian::DatabaseVersionError (DatabaseVersionError indicates that a database is in an unsupported format)	70
Xapian::DateValueRangeProcessor (Handle a date range)	72
Xapian::DocNotFoundError (Indicates an attempt to access a document not present in the database)	74
Xapian::Document (A handle representing a document in a Xapian database)	75
Xapian::Enquire (This class provides an interface to the information retrieval system for the purpose of searching)	81
Xapian::Error (All exceptions thrown by Xapian are subclasses of Xapian::Error)	94

Xapian::ErrorHandler (Decide if a Xapian::Error exception should be ignored)	96
Xapian::ESet (Class representing an ordered set of expand terms (an ESet))	98
Xapian::ESetIterator (Iterate through terms in the ESet)	101
Xapian::ExpandDecider (Virtual base class for expand decider functor)	105
Xapian::ExpandDeciderAnd (ExpandDecider subclass which rejects terms using two ExpandDeciders)	106
Xapian::ExpandDeciderFilterTerms (ExpandDecider subclass which rejects terms in a specified list)	108
Xapian::FeatureUnavailableError (Indicates an attempt to use a feature which is unavailable)	110
Xapian::InternalError (InternalError indicates a runtime problem of some sort)	112
Xapian::InvalidArgumentError (InvalidArgumentError indicates an invalid parameter value was passed to the API)	113
Xapian::InvalidOperationError (InvalidOperationError indicates the API was used in an invalid way)	114
Xapian::LogicError (The base class for exceptions indicating errors in the program logic)	115
Xapian::MatchDecider (Base class for matcher decision functor)	116
Xapian::MSet (A match set (MSet))	117
Xapian::MSetIterator (An iterator pointing to items in an MSet)	125
Xapian::MultiValueSorter (Sorter subclass which sorts by a several values)	130
Xapian::NetworkError (Indicates a problem communicating with a remote database)	131
Xapian::NetworkTimeoutError (Indicates a timeout expired while communicating with a remote database)	133
Xapian::NumberValueRangeProcessor (Handle a number range)	135
Xapian::PositionIterator (An iterator pointing to items in a list of positions)	137
Xapian::PostingIterator (An iterator pointing to items in a list of postings)	139
Xapian::Query (Class representing a query)	143
Xapian::QueryParser (Build a Xapian::Query object from a user query string)	149
Xapian::QueryParserError (Indicates a query string can't be parsed)	157
Xapian::RangeError (RangeError indicates an attempt to access outside the bounds of a container)	158
Xapian::RSet (A relevance set (R-Set))	159
Xapian::RuntimeError (The base class for exceptions indicating errors only detectable at runtime)	162
Xapian::SimpleStopper (Simple implementation of Stopper class - this will suit most users)	163
Xapian::Sorter (Virtual base class for sorter functor)	165
Xapian::Stem (Class representing a stemming algorithm)	166
Xapian::Stopper (Base class for stop-word decision functor)	169
Xapian::StringValueRangeProcessor (Handle a string range)	171
Xapian::TermGenerator (Parses a piece of text and generate terms)	173
Xapian::TermIterator (An iterator pointing to items in a list of terms)	178
Xapian::TradWeight (Traditional probabilistic weighting scheme)	182
Xapian::UnimplementedError (UnimplementedError indicates an attempt to use an unimplemented feature)	186

Xapian::Utf8Iterator (An iterator which returns Unicode character values from a UTF-8 encoded string)	187
Xapian::ValueIterator (An iterator pointing to values associated with a document)	192
Xapian::ValueRangeProcessor (Base class for value range processors)	196
Xapian::Weight (Abstract base class for weighting schemes)	197
Xapian::WritableDatabase (This class provides read/write access to a database)	201

Chapter 4

xapian-core File Index

4.1 xapian-core File List

Here is a list of all documented files with brief descriptions:

xapian/error.h (Hierarchy of classes which Xapian can throw as exceptions) .	213
xapian/version.h (Define preprocessor symbols for the library version)	215
xapian.h (Public interfaces for the Xapian library)	217
xapian/database.h (API for working with Xapian databases)	218
xapian/dbfactory.h (Factory functions for constructing Database and WritableDatabase objects)	219
xapian/document.h (API for working with documents)	221
xapian/enquire.h (API for running queries)	222
xapian/errorhandler.h (Decide if a Xapian::Error exception should be ignored)	224
xapian/expanddecider.h (Allow rejection of terms during ESet generation) . .	225
xapian/positioniterator.h (Classes for iterating through position lists)	226
xapian/postingiterator.h (Classes for iterating through posting lists)	227
xapian/query.h (Classes for representing a query)	228
xapian/queryparser.h (Parsing a user query string to build a Xapian::Query object)	229
xapian/sorter.h (Build sort keys for MSet ordering)	230
xapian/stem.h (Stemming algorithms)	231
xapian/termgenerator.h (Parse free text and generate terms)	232
xapian/termiterator.h (Classes for iterating through term lists)	233
xapian/types.h (Typedefs for Xapian)	234
xapian/unicode.h (Unicode and UTF-8 related classes and functions)	236
xapian/valueiterator.h (Classes for iterating through values)	238

Chapter 5

xapian-core Page Index

5.1 xapian-core Related Pages

Here is a list of all related documentation pages:

Deprecated List [239](#)

Chapter 6

xapian-core Namespace Documentation

6.1 Xapian Namespace Reference

The [Xapian](#) namespace contains public interfaces for the [Xapian](#) library.

Classes

- class [Error](#)
All exceptions thrown by [Xapian](#) are subclasses of [Xapian::Error](#).
- class [LogicError](#)
The base class for exceptions indicating errors in the program logic.
- class [RuntimeError](#)
The base class for exceptions indicating errors only detectable at runtime.
- class [AssertionError](#)
[AssertionError](#) is thrown if a logical assertion inside [Xapian](#) fails.
- class [InvalidArgumentError](#)
[InvalidArgumentError](#) indicates an invalid parameter value was passed to the API.
- class [InvalidOperationError](#)
[InvalidOperationError](#) indicates the API was used in an invalid way.
- class [UnimplementedError](#)
[UnimplementedError](#) indicates an attempt to use an unimplemented feature.
- class [DatabaseError](#)

DatabaseError indicates some sort of database related error.

- class [DatabaseCorruptError](#)
DatabaseCorruptError indicates database corruption was detected.
- class [DatabaseCreateError](#)
DatabaseCreateError indicates a failure to create a database.
- class [DatabaseLockError](#)
DatabaseLockError indicates failure to lock a database.
- class [DatabaseModifiedError](#)
DatabaseModifiedError indicates a database was modified.
- class [DatabaseOpeningError](#)
DatabaseOpeningError indicates failure to open a database.
- class [DatabaseVersionError](#)
DatabaseVersionError indicates that a database is in an unsupported format.
- class [DocNotFoundError](#)
Indicates an attempt to access a document not present in the database.
- class [FeatureUnavailableError](#)
Indicates an attempt to use a feature which is unavailable.
- class [InternalError](#)
InternalError indicates a runtime problem of some sort.
- class [NetworkError](#)
Indicates a problem communicating with a remote database.
- class [NetworkTimeoutError](#)
Indicates a timeout expired while communicating with a remote database.
- class [QueryParserError](#)
Indicates a query string can't be parsed.
- class [RangeError](#)
RangeError indicates an attempt to access outside the bounds of a container.
- class [Database](#)
This class is used to access a database, or a group of databases.
- class [WritableDatabase](#)
This class provides read/write access to a database.

- class [Document](#)
A handle representing a document in a [Xapian](#) database.
- class [MSet](#)
A match set ([MSet](#)).
- class [MSetIterator](#)
An iterator pointing to items in an [MSet](#).
- class [ESet](#)
Class representing an ordered set of expand terms (an [ESet](#)).
- class [ESetIterator](#)
Iterate through terms in the [ESet](#).
- class [RSet](#)
A relevance set (R-Set).
- class [MatchDecider](#)
Base class for matcher decision functor.
- class [Enquire](#)
This class provides an interface to the information retrieval system for the purpose of searching.
- class [Weight](#)
Abstract base class for weighting schemes.
- class [BoolWeight](#)
Boolean weighting scheme (everything gets 0).
- class [BM25Weight](#)
BM25 weighting scheme.
- class [TradWeight](#)
Traditional probabilistic weighting scheme.
- class [ErrorHandler](#)
Decide if a [Xapian::Error](#) exception should be ignored.
- class [ExpandDecider](#)
Virtual base class for expand decider functor.
- class [ExpandDeciderAnd](#)
[ExpandDecider](#) subclass which rejects terms using two [ExpandDeciders](#).

- class [ExpandDeciderFilterTerms](#)
ExpandDecider subclass which rejects terms in a specified list.
- class [PositionIterator](#)
An iterator pointing to items in a list of positions.
- class [PostingIterator](#)
An iterator pointing to items in a list of postings.
- class [Query](#)
Class representing a query.
- class [Stopper](#)
Base class for stop-word decision functor.
- class [SimpleStopper](#)
Simple implementation of [Stopper](#) class - this will suit most users.
- struct [ValueRangeProcessor](#)
Base class for value range processors.
- class [StringValueRangeProcessor](#)
Handle a string range.
- class [DateValueRangeProcessor](#)
Handle a date range.
- class [NumberValueRangeProcessor](#)
Handle a number range.
- class [QueryParser](#)
Build a [Xapian::Query](#) object from a user query string.
- class [Sorter](#)
Virtual base class for sorter functor.
- class [MultiValueSorter](#)
[Sorter](#) subclass which sorts by a several values.
- class [Stem](#)
Class representing a stemming algorithm.
- class [TermGenerator](#)
Parses a piece of text and generate terms.

- class [TermIterator](#)
An iterator pointing to items in a list of terms.
- class [Utf8Iterator](#)
An iterator which returns [Unicode](#) character values from a UTF-8 encoded string.
- class [ValueIterator](#)
An iterator pointing to values associated with a document.

Namespaces

- namespace [Auto](#)
[Database](#) factory functions which determine the database type automatically.
- namespace [Flint](#)
[Database](#) factory functions for the flint backend.
- namespace [InMemory](#)
[Database](#) factory functions for the inmemory backend.
- namespace [Quartz](#)
[Database](#) factory functions for the quartz backend.
- namespace [Remote](#)
[Database](#) factory functions for the remote backend.
- namespace [Unicode](#)
Functions associated with handling [Unicode](#) characters.

Typedefs

- typedef unsigned [doccount](#)
A count of documents.
- typedef int [doccount_diff](#)
A signed difference between two counts of documents.
- typedef unsigned [docid](#)
A unique identifier for a document.
- typedef double [doclength](#)
A normalised document length.

- typedef int [percent](#)
The percentage score for a document in an [MSet](#).
- typedef unsigned [termcount](#)
A counts of terms.
- typedef int [termcount_diff](#)
A signed difference between two counts of terms.
- typedef unsigned [termpos](#)
A term position within a document or query.
- typedef int [termpos_diff](#)
A signed difference between two term positions.
- typedef unsigned [timeout](#)
A timeout value in milliseconds.
- typedef unsigned [valueno](#)
The number for a value slot in a document.
- typedef int [valueno_diff](#)
A signed difference between two value slot numbers.
- typedef double [weight](#)
The weight of a document or term.

Functions

- bool [operator==](#) (const [MSetIterator](#) &a, const [MSetIterator](#) &b)
Equality test for [MSetIterator](#) objects.
- bool [operator!=](#) (const [MSetIterator](#) &a, const [MSetIterator](#) &b)
Inequality test for [MSetIterator](#) objects.
- bool [operator==](#) (const [ESetIterator](#) &a, const [ESetIterator](#) &b)
Equality test for [ESetIterator](#) objects.
- bool [operator!=](#) (const [ESetIterator](#) &a, const [ESetIterator](#) &b)
Inequality test for [ESetIterator](#) objects.
- bool [operator==](#) (const [PositionIterator](#) &a, const [PositionIterator](#) &b)
Test equality of two [PositionIterators](#).
- bool [operator!=](#) (const [PositionIterator](#) &a, const [PositionIterator](#) &b)

Test inequality of two PositionIterators.

- bool `operator==` (const [PostingIterator](#) &a, const [PostingIterator](#) &b)
Test equality of two PostingIterators.
- bool `operator!=` (const [PostingIterator](#) &a, const [PostingIterator](#) &b)
Test inequality of two PostingIterators.
- std::string `sortable_serialise` (double value)
Convert a floating point number to a string, preserving sort order.
- double `sortable_unserialise` (const std::string &value)
Convert a string encoded using sortable_serialise back to a floating point number.
- bool `operator==` (const [TermIterator](#) &a, const [TermIterator](#) &b)
Equality test for TermIterator objects.
- bool `operator!=` (const [TermIterator](#) &a, const [TermIterator](#) &b)
Inequality test for TermIterator objects.
- bool `operator==` (const [ValueIterator](#) &a, const [ValueIterator](#) &b)
Equality test for ValueIterator objects.
- bool `operator!=` (const [ValueIterator](#) &a, const [ValueIterator](#) &b)
Inequality test for ValueIterator objects.
- const char * `version_string` ()
Report the version string of the library which the program is linked with.
- const char * `xapian_version_string` ()
For compatibility with Xapian 0.9.5 and earlier.
- int `major_version` ()
Report the major version of the library which the program is linked with.
- int `xapian_major_version` ()
For compatibility with Xapian 0.9.5 and earlier.
- int `minor_version` ()
Report the minor version of the library which the program is linked with.
- int `xapian_minor_version` ()
For compatibility with Xapian 0.9.5 and earlier.
- int `revision` ()
Report the revision of the library which the program is linked with.

- `int xapian_revision ()`

For compatibility with [Xapian](#) 0.9.5 and earlier.

Variables

- `const int DB_CREATE_OR_OPEN = 1`

Open for read/write; create if no db exists.

- `const int DB_CREATE = 2`

Create a new database; fail if db exists.

- `const int DB_CREATE_OR_OVERWRITE = 3`

Overwrite existing db; create if none exists.

- `const int DB_OPEN = 4`

Open for read/write; fail if no db exists.

- `const valueno BAD_VALUENO = static_cast<valueno>(-1)`

Reserved value to indicate "no valueno".

6.1.1 Detailed Description

The [Xapian](#) namespace contains public interfaces for the [Xapian](#) library.

6.1.2 Typedef Documentation

6.1.2.1 `typedef unsigned Xapian::doccount`

A count of documents.

This is used to hold values such as the number of documents in a database and the frequency of a term in the database.

6.1.2.2 `typedef int Xapian::doccount_diff`

A signed difference between two counts of documents.

This is used by the [Xapian](#) classes which are STL containers of documents for "difference_type".

6.1.2.3 typedef unsigned Xapian::docid

A unique identifier for a document.

Docid 0 is invalid, providing an "out of range" value which can be used to mean "not a valid document".

6.1.2.4 typedef double Xapian::doclength

A normalised document length.

The normalised document length is the document length divided by the average document length in the database.

6.1.2.5 typedef int Xapian::percent

The percentage score for a document in an [MSet](#).

6.1.2.6 typedef unsigned Xapian::termcount

A counts of terms.

This is used to hold values such as the Within [Document](#) Frequency (wdf).

6.1.2.7 typedef int Xapian::termcount_diff

A signed difference between two counts of terms.

This is used by the [Xapian](#) classes which are STL containers of terms for "difference_type".

6.1.2.8 typedef unsigned Xapian::termpos

A term position within a document or query.

6.1.2.9 typedef int Xapian::termpos_diff

A signed difference between two term positions.

This is used by the [Xapian](#) classes which are STL containers of positions for "difference_type".

6.1.2.10 typedef unsigned Xapian::timeout

A timeout value in milliseconds.

There are 1000 milliseconds in a second, so for example, to set a timeout of 5 seconds use 5000.

6.1.2.11 `typedef unsigned Xapian::valueno`

The number for a value slot in a document.

Any value slot number except `Xapian::BAD_VALUENO` is valid.

6.1.2.12 `typedef int Xapian::valueno_diff`

A signed difference between two value slot numbers.

This is used by the `Xapian` classes which are STL containers of values for "difference_type".

6.1.2.13 `typedef double Xapian::weight`

The weight of a document or term.

6.1.3 Function Documentation

6.1.3.1 `int Xapian::major_version ()`

Report the major version of the library which the program is linked with.

This may be different to the version compiled against (given by `XAPIAN_MAJOR_VERSION`) if shared libraries are being used.

6.1.3.2 `int Xapian::minor_version ()`

Report the minor version of the library which the program is linked with.

This may be different to the version compiled against (given by `XAPIAN_MINOR_VERSION`) if shared libraries are being used.

6.1.3.3 `bool Xapian::operator!= (const ValueIterator & a, const ValueIterator & b) [inline]`

Inequality test for `ValueIterator` objects.

6.1.3.4 `bool Xapian::operator!= (const TermIterator & a, const TermIterator & b) [inline]`

Inequality test for `TermIterator` objects.

6.1.3.5 `bool Xapian::operator!= (const PostingIterator & a, const PostingIterator & b) [inline]`

Test inequality of two `PostingIterators`.

6.1.3.6 `bool Xapian::operator!=(const PositionIterator & a, const PositionIterator & b)` `[inline]`

Test inequality of two PositionIterators.

6.1.3.7 `bool Xapian::operator!=(const ESetIterator & a, const ESetIterator & b)` `[inline]`

Inequality test for [ESetIterator](#) objects.

6.1.3.8 `bool Xapian::operator!=(const MSetIterator & a, const MSetIterator & b)` `[inline]`

Inequality test for [MSetIterator](#) objects.

6.1.3.9 `bool Xapian::operator==(const ValueIterator & a, const ValueIterator & b)` `[inline]`

Equality test for [ValueIterator](#) objects.

6.1.3.10 `bool Xapian::operator==(const TermIterator & a, const TermIterator & b)` `[inline]`

Equality test for [TermIterator](#) objects.

6.1.3.11 `bool Xapian::operator==(const PostingIterator & a, const PostingIterator & b)` `[inline]`

Test equality of two PostingIterators.

6.1.3.12 `bool Xapian::operator==(const PositionIterator & a, const PositionIterator & b)` `[inline]`

Test equality of two PositionIterators.

6.1.3.13 `bool Xapian::operator==(const ESetIterator & a, const ESetIterator & b)` `[inline]`

Equality test for [ESetIterator](#) objects.

6.1.3.14 `bool Xapian::operator==(const MSetIterator & a, const MSetIterator & b)` `[inline]`

Equality test for [MSetIterator](#) objects.

6.1.3.15 `int Xapian::revision ()`

Report the revision of the library which the program is linked with.

This may be different to the version compiled against (given by `XAPIAN_REVISION`) if shared libraries are being used.

6.1.3.16 `std::string Xapian::sortable_serialise (double value)`

Convert a floating point number to a string, preserving sort order.

This method converts a floating point number to a string, suitable for using as a value for numeric range restriction, or for use as a sort key.

The conversion is platform independent.

The conversion attempts to ensure that, for any pair of values supplied to the conversion algorithm, the result of comparing the original values (with a numeric comparison operator) will be the same as the result of comparing the resulting values (with a string comparison operator). On platforms which represent doubles with the precisions specified by IEEE_754, this will be the case: if the representation of doubles is more precise, it is possible that two very close doubles will be mapped to the same string, so will compare equal.

Note also that both zero and -zero will be converted to the same representation: since these compare equal, this satisfies the comparison constraint, but it's worth knowing this if you wish to use the encoding in some situation where this distinction matters.

Handling of NaN isn't (currently) guaranteed to be sensible.

6.1.3.17 `double Xapian::sortable_unserialise (const std::string & value)`

Convert a string encoded using *sortable_serialise* back to a floating point number.

This expects the input to be a string produced by *sortable_serialise()*. If the input is not such a string, the value returned is undefined (but no error will be thrown).

The result of the conversion will be exactly the value which was supplied to *sortable_serialise()* when making the string on platforms which represent doubles with the precisions specified by IEEE_754, but may be a different (nearby) value on other platforms.

6.1.3.18 `const char* Xapian::version_string ()`

Report the version string of the library which the program is linked with.

This may be different to the version compiled against (given by `XAPIAN_VERSION`) if shared libraries are being used.

6.1.3.19 `int Xapian::xapian_major_version ()`

For compatibility with [Xapian 0.9.5](#) and earlier.

Deprecated

This function is now deprecated, use [Xapian::major_version\(\)](#) instead.

6.1.3.20 int Xapian::xapian_minor_version ()

For compatibility with [Xapian](#) 0.9.5 and earlier.

Deprecated

This function is now deprecated, use [Xapian::minor_version\(\)](#) instead.

6.1.3.21 int Xapian::xapian_revision ()

For compatibility with [Xapian](#) 0.9.5 and earlier.

Deprecated

This function is now deprecated, use [Xapian::revision\(\)](#) instead.

6.1.3.22 const char* Xapian::xapian_version_string ()

For compatibility with [Xapian](#) 0.9.5 and earlier.

Deprecated

This function is now deprecated, use [Xapian::version_string\(\)](#) instead.

6.1.4 Variable Documentation**6.1.4.1 const valueno Xapian::BAD_VALUENO = static_cast<valueno>(-1)**

Reserved value to indicate "no valueno".

6.1.4.2 const int Xapian::DB_CREATE = 2

Create a new database; fail if db exists.

6.1.4.3 const int Xapian::DB_CREATE_OR_OPEN = 1

Open for read/write; create if no db exists.

6.1.4.4 const int Xapian::DB_CREATE_OR_OVERWRITE = 3

Overwrite existing db; create if none exists.

6.1.4.5 `const int Xapian::DB_OPEN = 4`

Open for read/write; fail if no db exists.

6.2 Xapian::Auto Namespace Reference

[Database](#) factory functions which determine the database type automatically.

Functions

- [Database open_stub](#) (const std::string &file)
Construct a [Database](#) object for a stub database file.

6.2.1 Detailed Description

[Database](#) factory functions which determine the database type automatically.

6.2.2 Function Documentation

6.2.2.1 Database Xapian::Auto::open_stub (const std::string &file)

Construct a [Database](#) object for a stub database file.

The stub database file contains serialised parameters for one or more databases.

Parameters:

file pathname of the stub database file.

6.3 Xapian::Flint Namespace Reference

[Database](#) factory functions for the flint backend.

Functions

- [Database open](#) (const std::string &dir)
Construct a [Database](#) object for read-only access to a [Flint](#) database.
- [WritableDatabase open](#) (const std::string &dir, int action, int block_size=8192)
Construct a [Database](#) object for update access to a [Flint](#) database.

6.3.1 Detailed Description

[Database](#) factory functions for the flint backend.

6.3.2 Function Documentation

6.3.2.1 WritableDatabase Xapian::Flint::open (const std::string & dir, int action, int block_size = 8192)

Construct a [Database](#) object for update access to a [Flint](#) database.

Parameters:

dir pathname of the directory containing the database.

action determines handling of existing/non-existing database:

- [Xapian::DB_CREATE](#) fail if database already exist, otherwise create new database.
- [Xapian::DB_CREATE_OR_OPEN](#) open existing database, or create new database if none exists.
- [Xapian::DB_CREATE_OR_OVERWRITE](#) overwrite existing database, or create new database if none exists.
- [Xapian::DB_OPEN](#) open existing database, failing if none exists.

block_size the Btree blocksize to use (in bytes), which must be a power of two between 2048 and 65536 (inclusive). The default (also used if an invalid value is passed) is 8192 bytes. This parameter is ignored when opening an existing database.

6.3.2.2 Database Xapian::Flint::open (const std::string & dir)

Construct a [Database](#) object for read-only access to a [Flint](#) database.

Parameters:

dir pathname of the directory containing the database.

6.4 Xapian::InMemory Namespace Reference

[Database](#) factory functions for the inmemory backend.

Functions

- [WritableDatabase](#) `open ()`

Construct a [WritableDatabase](#) object for a new, empty [InMemory](#) database.

6.4.1 Detailed Description

[Database](#) factory functions for the inmemory backend.

6.4.2 Function Documentation

6.4.2.1 WritableDatabase Xapian::InMemory::open ()

Construct a [WritableDatabase](#) object for a new, empty [InMemory](#) database.

Only a writable [InMemory](#) database can be created, since a read-only one would always remain empty.

6.5 Xapian::Quartz Namespace Reference

[Database](#) factory functions for the quartz backend.

Functions

- [Database open](#) (const std::string &dir)
Construct a [Database](#) object for read-only access to a [Quartz](#) database.
- [WritableDatabaseopen](#) (const std::string &dir, int action, int block_size=8192)
Construct a [Database](#) object for update access to a [Quartz](#) database.

6.5.1 Detailed Description

[Database](#) factory functions for the quartz backend.

6.5.2 Function Documentation

6.5.2.1 Database Xapian::Quartz::open (const std::string & dir)

Construct a [Database](#) object for read-only access to a [Quartz](#) database.

The [Quartz](#) backend is deprecated - use the [Flint](#) backend instead.

Parameters:

dir pathname of the directory containing the database.

6.5.2.2 Xapian::Quartz::WritableDatabaseopen (const std::string & dir, int action, int block_size = 8192)

Construct a [Database](#) object for update access to a [Quartz](#) database.

The [Quartz](#) backend is deprecated - use the [Flint](#) backend instead.

Parameters:

dir pathname of the directory containing the database.

action determines handling of existing/non-existing database:

- [Xapian::DB_CREATE](#) fail if database already exist, otherwise create new database.
- [Xapian::DB_CREATE_OR_OPEN](#) open existing database, or create new database if none exists.
- [Xapian::DB_CREATE_OR_OVERWRITE](#) overwrite existing database, or create new database if none exists.

- [Xapian::DB_OPEN](#) open existing database, failing if none exists.

block_size the Btree blocksize to use (in bytes), which must be a power of two between 2048 and 65536 (inclusive). The default (also used if an invalid value is passed) is 8192 bytes. This parameter is ignored when opening an existing database.

6.6 Xapian::Remote Namespace Reference

[Database](#) factory functions for the remote backend.

Functions

- [Database open](#) (const std::string &host, unsigned int port, [Xapian::timeout timeout=10000](#), [Xapian::timeout connect_timeout=10000](#))
Construct a [Database](#) object for read-only access to a remote database accessed via a TCP connection.
- [WritableDatabase open_writable](#) (const std::string &host, unsigned int port, [Xapian::timeout timeout=0](#), [Xapian::timeout connect_timeout=10000](#))
Construct a [WritableDatabase](#) object for update access to a remote database accessed via a TCP connection.
- [Database open](#) (const std::string &program, const std::string &args, [Xapian::timeout timeout=10000](#))
Construct a [Database](#) object for read-only access to a remote database accessed via a program.
- [WritableDatabase open_writable](#) (const std::string &program, const std::string &args, [Xapian::timeout timeout=0](#))
Construct a [WritableDatabase](#) object for update access to a remote database accessed via a program.

6.6.1 Detailed Description

[Database](#) factory functions for the remote backend.

6.6.2 Function Documentation

6.6.2.1 Database Xapian::Remote::open (const std::string & *program*, const std::string & *args*, Xapian::timeout *timeout* = 10000)

Construct a [Database](#) object for read-only access to a remote database accessed via a program.

Access to the remote database is done by running an external program and communicating with it on stdin/stdout.

Parameters:

program the external program to run.

args space-separated list of arguments to pass to program.

timeout timeout in milliseconds. If this timeout is exceeded for any individual operation on the remote database then [Xapian::NetworkTimeoutError](#) is thrown. A timeout of 0 means don't timeout. (Default is 10000ms, which is 10 seconds).

6.6.2.2 Database `Xapian::Remote::open` (`const std::string & host`, `unsigned int port`, `Xapian::timeout timeout = 10000`, `Xapian::timeout connect_timeout = 10000`)

Construct a [Database](#) object for read-only access to a remote database accessed via a TCP connection.

Access to the remote database is via a TCP connection to the specified host and port.

Parameters:

host hostname to connect to.

port port number to connect to.

timeout timeout in milliseconds. If this timeout is exceeded for any individual operation on the remote database then [Xapian::NetworkTimeoutError](#) is thrown. A timeout of 0 means don't timeout. (Default is 10000ms, which is 10 seconds).

connect_timeout timeout to use when connecting to the server. If this timeout is exceeded then [Xapian::NetworkTimeoutError](#) is thrown. A timeout of 0 means don't timeout. (Default is 10000ms, which is 10 seconds).

6.6.2.3 WritableDatabase `Xapian::Remote::open_writable` (`const std::string & program`, `const std::string & args`, `Xapian::timeout timeout = 0`)

Construct a [WritableDatabase](#) object for update access to a remote database accessed via a program.

Access to the remote database is done by running an external program and communicating with it on stdin/stdout.

Parameters:

program the external program to run.

args space-separated list of arguments to pass to program.

timeout timeout in milliseconds. If this timeout is exceeded for any individual operation on the remote database then [Xapian::NetworkTimeoutError](#) is thrown. (Default is 0, which means don't timeout).

6.6.2.4 WritableDatabase Xapian::Remote::open_writable (const std::string & *host*, unsigned int *port*, Xapian::timeout *timeout* = 0, Xapian::timeout *connect_timeout* = 10000)

Construct a [WritableDatabase](#) object for update access to a remote database accessed via a TCP connection.

Access to the remote database is via a TCP connection to the specified host and port.

Parameters:

host hostname to connect to.

port port number to connect to.

timeout timeout in milliseconds. If this timeout is exceeded for any individual operation on the remote database then [Xapian::NetworkTimeoutError](#) is thrown. (Default is 0, which means don't timeout).

connect_timeout timeout to use when connecting to the server. If this timeout is exceeded then [Xapian::NetworkTimeoutError](#) is thrown. A timeout of 0 means don't timeout. (Default is 10000ms, which is 10 seconds).

6.7 Xapian::Unicode Namespace Reference

Functions associated with handling [Unicode](#) characters.

Enumerations

- enum [category](#) {
UNASSIGNED, UPPERCASE_LETTER, LOWERCASE_LETTER,
TITLECASE_LETTER,
MODIFIER_LETTER, OTHER_LETTER, NON_SPACING_MARK,
ENCLOSING_MARK,
COMBINING_SPACING_MARK, DECIMAL_DIGIT_NUMBER,
LETTER_NUMBER, OTHER_NUMBER,
SPACE_SEPARATOR, LINE_SEPARATOR, PARAGRAPH_
SEPARATOR, CONTROL,
FORMAT, PRIVATE_USE, SURROGATE, CONNECTOR_
PUNCTUATION,
DASH_PUNCTUATION, OPEN_PUNCTUATION, CLOSE_
PUNCTUATION, INITIAL_QUOTE_PUNCTUATION,
FINAL_QUOTE_PUNCTUATION, OTHER_PUNCTUATION, MATH_
SYMBOL, CURRENCY_SYMBOL,
MODIFIER_SYMBOL, OTHER_SYMBOL }

Each Unicode character is in exactly one of these categories.

Functions

- unsigned [nonascii_to_utf8](#) (unsigned ch, char *buf)
Convert a single non-ASCII [Unicode](#) character to UTF-8.
- unsigned [to_utf8](#) (unsigned ch, char *buf)
Convert a single [Unicode](#) character to UTF-8.
- void [append_utf8](#) (std::string &s, unsigned ch)
Append the UTF-8 representation of a single [Unicode](#) character to a std::string.
- [category](#) [get_category](#) (unsigned ch)
Return the category which a given [Unicode](#) character falls into.
- bool [is_wordchar](#) (unsigned ch)
Test if a given [Unicode](#) character is "word character".
- bool [is_whitespace](#) (unsigned ch)
Test if a given [Unicode](#) character is a whitespace character.

- bool `is_currency` (unsigned *ch*)
Test if a given [Unicode](#) character is a currency symbol.
- unsigned `tolower` (unsigned *ch*)
Convert a [Unicode](#) character to lowercase.
- unsigned `toupper` (unsigned *ch*)
Convert a [Unicode](#) character to uppercase.
- std::string `tolower` (const std::string &*term*)
Convert a UTF-8 std::string to lowercase.
- std::string `toupper` (const std::string &*term*)
Convert a UTF-8 std::string to uppercase.

6.7.1 Detailed Description

Functions associated with handling [Unicode](#) characters.

6.7.2 Enumeration Type Documentation

6.7.2.1 enum Xapian::Unicode::category

Each [Unicode](#) character is in exactly one of these categories.

6.7.3 Function Documentation

6.7.3.1 void Xapian::Unicode::append_utf8 (std::string & *s*, unsigned *ch*) [inline]

Append the UTF-8 representation of a single [Unicode](#) character to a std::string.

6.7.3.2 category Xapian::Unicode::get_category (unsigned *ch*) [inline]

Return the category which a given [Unicode](#) character falls into.

6.7.3.3 bool Xapian::Unicode::is_currency (unsigned *ch*) [inline]

Test if a given [Unicode](#) character is a currency symbol.

6.7.3.4 `bool Xapian::Unicode::is_whitespace (unsigned ch)` `[inline]`

Test if a given [Unicode](#) character is a whitespace character.

6.7.3.5 `bool Xapian::Unicode::is_wordchar (unsigned ch)` `[inline]`

Test if a given [Unicode](#) character is "word character".

6.7.3.6 `unsigned Xapian::Unicode::nonascii_to_utf8 (unsigned ch, char * buf)`

Convert a single non-ASCII [Unicode](#) character to UTF-8.

This is intended mainly as a helper method for `to_utf8()`.

The character *ch* (which must be > 128) is written to the buffer *buf* and the length of the resultant UTF-8 character is returned.

NB *buf* must have space for (at least) 4 bytes.

6.7.3.7 `unsigned Xapian::Unicode::to_utf8 (unsigned ch, char * buf)`
`[inline]`

Convert a single [Unicode](#) character to UTF-8.

The character *ch* is written to the buffer *buf* and the length of the resultant UTF-8 character is returned.

NB *buf* must have space for (at least) 4 bytes.

6.7.3.8 `std::string Xapian::Unicode::tolower (const std::string & term)`
`[inline]`

Convert a UTF-8 `std::string` to lowercase.

6.7.3.9 `unsigned Xapian::Unicode::tolower (unsigned ch)` `[inline]`

Convert a [Unicode](#) character to lowercase.

6.7.3.10 `std::string Xapian::Unicode::toupper (const std::string & term)`
`[inline]`

Convert a UTF-8 `std::string` to uppercase.

6.7.3.11 `unsigned Xapian::Unicode::toupper (unsigned ch)` `[inline]`

Convert a [Unicode](#) character to uppercase.


Chapter 7

xapian-core Class Documentation

7.1 Xapian::AssertionError Class Reference

[AssertionError](#) is thrown if a logical assertion inside [Xapian](#) fails.

Inheritance diagram for Xapian::AssertionError:



Public Member Functions

- [AssertionError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [AssertionError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.1.1 Detailed Description

[AssertionError](#) is thrown if a logical assertion inside [Xapian](#) fails.

In a debug build of [Xapian](#), a failed assertion in the core library code will cause [AssertionError](#) to be thrown.

This represents a bug in [Xapian](#) (either an invariant, precondition, etc has been violated, or the assertion is incorrect!)

7.1.2 Constructor & Destructor Documentation

7.1.2.1 [Xapian::AssertionError::AssertionError](#) (const std::string & *msg_*, const std::string & *context_* = "", int *errno_* = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.1.2.2 [Xapian::AssertionError::AssertionError](#) (const std::string & *msg_*, int *errno_*) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.2 Xapian::BM25Weight Class Reference

BM25 weighting scheme.

Inheritance diagram for Xapian::BM25Weight:



Public Member Functions

- `BM25Weight` (double k1_, double k2_, double k3_, double b_, double min_normlen_)
Construct a BM25 weight.
- `BM25Weight * clone () const`
Return a new weight object of this type.
- `std::string name () const`
Name of the weighting scheme.
- `std::string serialise () const`
Serialise object parameters into a string.
- `BM25Weight * unserialise (const std::string &s) const`
Create object given string serialisation returned by `serialise()`.
- `Xapian::weight get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const`
Get a weight which is part of the sum over terms being performed.
- `Xapian::weight get_maxpart () const`
Gets the maximum value that `get_sumpart()` may return.
- `Xapian::weight get_sumextra (Xapian::doclength len) const`
Get an extra weight for a document to add to the sum calculated over the query terms.
- `Xapian::weight get_maxextra () const`
Gets the maximum value that `get_sumextra()` may return.
- `bool get_sumpart_needs_doclength () const`
return false if the weight object doesn't need doclength

7.2.1 Detailed Description

BM25 weighting scheme.

BM25 weighting options : The BM25 formula is

$$\frac{k_2 \cdot n_q}{1 + L_d} + \sum_t \frac{(k_3 + 1)q_t}{k_3 + q_t} \cdot \frac{(k_1 + 1)f_{t,d}}{k_1((1 - b) + bL_d) + f_{t,d}} \cdot w_t$$

where

- w_t is the termweight of term t
- $f_{t,d}$ is the within document frequency of term t in document d
- q_t is the within query frequency of term t
- L_d is the normalised length of document d
- n_q is the size of the query
- k_1, k_2, k_3 and b are user specified parameters

7.2.2 Constructor & Destructor Documentation

7.2.2.1 Xapian::BM25Weight::BM25Weight (double $k1_$, double $k2_$, double $k3_$, double $b_$, double $min_normlen_$) [inline]

Construct a BM25 weight.

Parameters:

- $k1$** governs the importance of within document frequency. Must be ≥ 0 . 0 means ignore wdf. Default is 1.
- $k2$** compensation factor for the high wdf values in large documents. Must be ≥ 0 . 0 means no compensation. Default is 0.
- $k3$** governs the importance of within query frequency. Must be ≥ 0 . 0 means ignore wqf. Default is 1.
- b** Relative importance of within document frequency and document length. Must be ≥ 0 and ≤ 1 . Default is 0.5.
- $min_normlen$** specifies a cutoff on the minimum value that can be used for a normalised document length - smaller values will be forced up to this cutoff. This prevents very small documents getting a huge bonus weight. Default is 0.5.

7.2.3 Member Function Documentation

7.2.3.1 BM25Weight* Xapian::BM25Weight::clone () const [virtual]

Return a new weight object of this type.

A subclass called FooWeight taking parameters param1 and param2 should implement this as:

```
virtual FooWeight * clone() const { return new FooWeight(param1, param2); }
```

Implements [Xapian::Weight](#).

7.2.3.2 std::string Xapian::BM25Weight::name () const [virtual]

Name of the weighting scheme.

If the subclass is called FooWeight, this should return "Foo".

Implements [Xapian::Weight](#).

7.2.3.3 std::string Xapian::BM25Weight::serialise () const [virtual]

Serialise object parameters into a string.

Implements [Xapian::Weight](#).

7.2.3.4 BM25Weight* Xapian::BM25Weight::unserialise (const std::string & s) const [virtual]

Create object given string serialisation returned by [serialise\(\)](#).

Implements [Xapian::Weight](#).

7.2.3.5 Xapian::weight Xapian::BM25Weight::get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const [virtual]

Get a weight which is part of the sum over terms being performed.

This returns a weight for a given term and document. These weights are summed to give a total weight for the document.

Parameters:

wdf the within document frequency of the term.

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.2.3.6 Xapian::weight Xapian::BM25Weight::get_maxpart () const [virtual]

Gets the maximum value that [get_sumpart\(\)](#) may return.

This is used in optimising searches, by having the postlist tree decay appropriately when parts of it can have limited, or no, further effect.

Implements [Xapian::Weight](#).

7.2.3.7 **Xapian::weight Xapian::BM25Weight::get_sumextra** (Xapian::doclength *len*) const [virtual]

Get an extra weight for a document to add to the sum calculated over the query terms.
This returns a weight for a given document, and is used by some weighting schemes to account for influence such as document length.

Parameters:

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.2.3.8 **Xapian::weight Xapian::BM25Weight::get_maxextra ()** const [virtual]

Gets the maximum value that [get_sumextra\(\)](#) may return.

This is used in optimising searches.

Implements [Xapian::Weight](#).

7.2.3.9 **bool Xapian::BM25Weight::get_sumpart_needs_doclength ()** const [virtual]

return false if the weight object doesn't need doclength

Reimplemented from [Xapian::Weight](#).


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.3 Xapian::BoolWeight Class Reference

Boolean weighting scheme (everything gets 0).

Inheritance diagram for Xapian::BoolWeight:



Public Member Functions

- [BoolWeight](#) * [clone](#) () const
Return a new weight object of this type.
- std::string [name](#) () const
Name of the weighting scheme.
- std::string [serialise](#) () const
Serialise object parameters into a string.
- [BoolWeight](#) * [unserialise](#) (const std::string &s) const
Create object given string serialisation returned by [serialise\(\)](#).
- [Xapian::weight](#) [get_sumpart](#) ([Xapian::termcount](#) wdf, [Xapian::doclength](#) len) const
Get a weight which is part of the sum over terms being performed.
- [Xapian::weight](#) [get_maxpart](#) () const
Gets the maximum value that [get_sumpart\(\)](#) may return.
- [Xapian::weight](#) [get_sumextra](#) ([Xapian::doclength](#) len) const
Get an extra weight for a document to add to the sum calculated over the query terms.
- [Xapian::weight](#) [get_maxextra](#) () const
Gets the maximum value that [get_sumextra\(\)](#) may return.
- bool [get_sumpart_needs_doclength](#) () const
return false if the weight object doesn't need doclength

7.3.1 Detailed Description

Boolean weighting scheme (everything gets 0).

7.3.2 Member Function Documentation

7.3.2.1 BoolWeight* Xapian::BoolWeight::clone () const [virtual]

Return a new weight object of this type.

A subclass called FooWeight taking parameters param1 and param2 should implement this as:

```
virtual FooWeight * clone() const { return new FooWeight(param1, param2); }
```

Implements [Xapian::Weight](#).

7.3.2.2 std::string Xapian::BoolWeight::name () const [virtual]

Name of the weighting scheme.

If the subclass is called FooWeight, this should return "Foo".

Implements [Xapian::Weight](#).

7.3.2.3 std::string Xapian::BoolWeight::serialise () const [virtual]

Serialise object parameters into a string.

Implements [Xapian::Weight](#).

7.3.2.4 BoolWeight* Xapian::BoolWeight::unserialise (const std::string & s) const [virtual]

Create object given string serialisation returned by [serialise\(\)](#).

Implements [Xapian::Weight](#).

7.3.2.5 Xapian::weight Xapian::BoolWeight::get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const [virtual]

Get a weight which is part of the sum over terms being performed.

This returns a weight for a given term and document. These weights are summed to give a total weight for the document.

Parameters:

wdf the within document frequency of the term.

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.3.2.6 Xapian::weight Xapian::BoolWeight::get_maxpart () const [virtual]

Gets the maximum value that [get_sumpart\(\)](#) may return.

This is used in optimising searches, by having the postlist tree decay appropriately when parts of it can have limited, or no, further effect.

Implements [Xapian::Weight](#).

7.3.2.7 Xapian::weight Xapian::BoolWeight::get_sumextra (Xapian::doclength len) const [virtual]

Get an extra weight for a document to add to the sum calculated over the query terms.

This returns a weight for a given document, and is used by some weighting schemes to account for influence such as document length.

Parameters:

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.3.2.8 Xapian::weight Xapian::BoolWeight::get_maxextra () const [virtual]

Gets the maximum value that [get_sumextra\(\)](#) may return.

This is used in optimising searches.

Implements [Xapian::Weight](#).

7.3.2.9 bool Xapian::BoolWeight::get_sumpart_needs_doclength () const [virtual]

return false if the weight object doesn't need doclength

Reimplemented from [Xapian::Weight](#).


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.4 Xapian::Database Class Reference

This class is used to access a database, or a group of databases.

Inheritance diagram for Xapian::Database:



Public Member Functions

- void [add_database](#) (const [Database](#) &database)
Add an existing database (or group of databases) to those accessed by this object.
- [Database](#) ()
Create a [Database](#) with no databases in.
- [Database](#) (const std::string &path)
Open a [Database](#), automatically determining the database backend to use.
- virtual [~Database](#) ()
Destroy this handle on the database.
- [Database](#) (const [Database](#) &other)
Copying is allowed.
- void [operator=](#) (const [Database](#) &other)
Assignment is allowed.
- void [reopen](#) ()
Re-open the database.
- virtual std::string [get_description](#) () const
Return a string describing this object.
- [PostingIterator](#) [postlist_begin](#) (const std::string &tname) const
An iterator pointing to the start of the postlist for a given term.
- [PostingIterator](#) [postlist_end](#) (const std::string &) const
Corresponding end iterator to [postlist_begin](#)().
- [TermIterator](#) [termlist_begin](#) ([Xapian::docid](#) did) const
An iterator pointing to the start of the termlist for a given document.

- [TermIterator termlist_end](#) ([Xapian::docid](#)) const
Corresponding end iterator to [termlist_begin\(\)](#).
- bool [has_positions](#) () const
Does this database have any positional information?
- [PositionIterator positionlist_begin](#) ([Xapian::docid](#) did, const std::string &name) const
An iterator pointing to the start of the position list for a given term in a given document.
- [PositionIterator positionlist_end](#) ([Xapian::docid](#), const std::string &) const
Corresponding end iterator to [positionlist_begin\(\)](#).
- [TermIterator allterms_begin](#) () const
An iterator which runs across all terms in the database.
- [TermIterator allterms_end](#) () const
Corresponding end iterator to [allterms_begin\(\)](#).
- [TermIterator allterms_begin](#) (const std::string &prefix) const
An iterator which runs across all terms with a given prefix.
- [TermIterator allterms_end](#) (const std::string &) const
Corresponding end iterator to [allterms_begin\(prefix\)](#).
- [Xapian::doccount get_doccount](#) () const
Get the number of documents in the database.
- [Xapian::docid get_lastdocid](#) () const
Get the highest document id which has been used in the database.
- [Xapian::doclength get_avlength](#) () const
Get the average length of the documents in the database.
- [Xapian::doccount get_termfreq](#) (const std::string &name) const
Get the number of documents in the database indexed by a given term.
- bool [term_exists](#) (const std::string &name) const
Check if a given term exists in the database.
- [Xapian::termcount get_collection_freq](#) (const std::string &name) const
Return the total number of occurrences of the given term.
- [Xapian::doclength get_doclength](#) ([Xapian::docid](#) did) const

Get the length of a document.

- void [keep_alive](#) ()
Send a "keep-alive" to remote databases to stop them timing out.
- [Xapian::Document get_document](#) ([Xapian::docid](#) did) const
Get a document from the database, given its document id.
- std::string [get_spelling_suggestion](#) (const std::string &word, unsigned max_edit_distance=2) const
Suggest a spelling correction.
- [Xapian::TermIterator spellings_begin](#) () const
An iterator which returns all the spelling correction targets.
- [Xapian::TermIterator spellings_end](#) () const
Corresponding end iterator to [spellings_begin](#)().
- [Xapian::TermIterator synonyms_begin](#) (const std::string &term) const
An iterator which returns all the synonyms for a given term.
- [Xapian::TermIterator synonyms_end](#) (const std::string &) const
Corresponding end iterator to [synonyms_begin](#)(term).
- [Xapian::TermIterator synonym_keys_begin](#) (const std::string &prefix="") const
An iterator which returns all terms which have synonyms.
- [Xapian::TermIterator synonym_keys_end](#) (const std::string &="") const
Corresponding end iterator to [synonym_keys_begin](#)(prefix).
- std::string [get_metadata](#) (const std::string &key) const
Get the user-specified metadata associated with a given key.
- [Xapian::TermIterator metadata_keys_begin](#) (const std::string &prefix="") const
An iterator which returns all user-specified metadata keys.
- [Xapian::TermIterator metadata_keys_end](#) (const std::string &="") const
Corresponding end iterator to [metadata_keys_begin](#)().

7.4.1 Detailed Description

This class is used to access a database, or a group of databases.

For searching, this class is used in conjunction with an [Enquire](#) object.

Exceptions:

InvalidArgumentError will be thrown if an invalid argument is supplied, for example, an unknown database type.

DatabaseOpeningError may be thrown if the database cannot be opened (for example, a required file cannot be found).

DatabaseVersionError may be thrown if the database is in an unsupported format (for example, created by a newer version of Xapian which uses an incompatible format).

7.4.2 Constructor & Destructor Documentation

7.4.2.1 Xapian::Database::Database ()

Create a [Database](#) with no databases in.

7.4.2.2 Xapian::Database::Database (const std::string & *path*) [explicit]

Open a [Database](#), automatically determining the database backend to use.

Parameters:

path directory that the database is stored in.

7.4.2.3 virtual Xapian::Database::~~Database () [virtual]

Destroy this handle on the database.

If there are no copies of this object remaining, the database(s) will be closed.

7.4.2.4 Xapian::Database::Database (const Database & *other*)

Copying is allowed.

The internals are reference counted, so copying is cheap.

7.4.3 Member Function Documentation

7.4.3.1 void Xapian::Database::add_database (const Database & *database*)

Add an existing database (or group of databases) to those accessed by this object.

Parameters:

database the database(s) to add.

7.4.3.2 void Xapian::Database::operator= (const Database & *other*)

Assignment is allowed.

The internals are reference counted, so assignment is cheap.

7.4.3.3 void Xapian::Database::reopen ()

Re-open the database.

This re-opens the database(s) to the latest available version(s). It can be used either to make sure the latest results are returned, or to recover from a [Xapian::DatabaseModifiedError](#).

7.4.3.4 virtual std::string Xapian::Database::get_description () const
[virtual]

Return a string describing this object.

Reimplemented in [Xapian::WritableDatabase](#).

7.4.3.5 PostingIterator Xapian::Database::postlist_begin (const std::string & *tname*) const

An iterator pointing to the start of the postlist for a given term.

If the term name is the empty string, the iterator returned will list all the documents in the database. Such an iterator will always return a WDF value of 1, since there is no obvious meaning for this quantity in this case.

7.4.3.6 PostingIterator Xapian::Database::postlist_end (const std::string &)
const [inline]

Corresponding end iterator to [postlist_begin\(\)](#).

7.4.3.7 TermIterator Xapian::Database::termlist_begin (Xapian::docid *did*)
const

An iterator pointing to the start of the termlist for a given document.

7.4.3.8 TermIterator Xapian::Database::termlist_end (Xapian::docid) const
[inline]

Corresponding end iterator to [termlist_begin\(\)](#).

7.4.3.9 bool Xapian::Database::has_positions () const

Does this database have any positional information?

7.4.3.10 PositionIterator Xapian::Database::positionlist_begin (Xapian::docid *did*, const std::string & *tname*) const

An iterator pointing to the start of the position list for a given term in a given document.

7.4.3.11 PositionIterator Xapian::Database::positionlist_end (Xapian::docid, const std::string &) const [inline]

Corresponding end iterator to [positionlist_begin\(\)](#).

7.4.3.12 TermIterator Xapian::Database::allterms_begin () const

An iterator which runs across all terms in the database.

7.4.3.13 TermIterator Xapian::Database::allterms_end () const [inline]

Corresponding end iterator to [allterms_begin\(\)](#).

7.4.3.14 TermIterator Xapian::Database::allterms_begin (const std::string & *prefix*) const

An iterator which runs across all terms with a given prefix.

This is functionally similar to getting an iterator with [allterms_begin\(\)](#) and then calling `skip_to(prefix)` on that iterator to move to the start of the prefix, but is more convenient (because it detects the end of the prefixed terms), and may be more efficient than simply calling `skip_to()` after opening the iterator, particularly for network databases.

Parameters:

prefix The prefix to restrict the returned terms to.

7.4.3.15 TermIterator Xapian::Database::allterms_end (const std::string &) const [inline]

Corresponding end iterator to `allterms_begin(prefix)`.

7.4.3.16 Xapian::doccount Xapian::Database::get_doccount () const

Get the number of documents in the database.

7.4.3.17 Xapian::docid Xapian::Database::get_lastdocid () const

Get the highest document id which has been used in the database.

7.4.3.18 Xapian::doclength Xapian::Database::get_avlength () const

Get the average length of the documents in the database.

7.4.3.19 Xapian::doccount Xapian::Database::get_termfreq (const std::string & *tname*) const

Get the number of documents in the database indexed by a given term.

7.4.3.20 bool Xapian::Database::term_exists (const std::string & *tname*) const

Check if a given term exists in the database.

Return true if and only if the term exists in the database. This is the same as (get_termfreq(*tname*) != 0), but will often be more efficient.

7.4.3.21 Xapian::termcount Xapian::Database::get_collection_freq (const std::string & *tname*) const

Return the total number of occurrences of the given term.

This is the sum of the number of occurrences of the term in each document it indexes: i.e., the sum of the within document frequencies of the term.

Parameters:

tname The term whose collection frequency is being requested.

7.4.3.22 Xapian::doclength Xapian::Database::get_doclength (Xapian::docid *did*) const

Get the length of a document.

7.4.3.23 void Xapian::Database::keep_alive ()

Send a "keep-alive" to remote databases to stop them timing out.

7.4.3.24 Xapian::Document Xapian::Database::get_document (Xapian::docid *did*) const

Get a document from the database, given its document id.

This method returns a [Xapian::Document](#) object which provides the information about a document.

Parameters:

did The document id of the document to retrieve.

Returns:

A [Xapian::Document](#) object containing the document data

Exceptions:

[Xapian::DocNotFoundError](#) The document specified could not be found in the database.

7.4.3.25 `std::string Xapian::Database::get_spelling_suggestion (const std::string & word, unsigned max_edit_distance = 2) const`

Suggest a spelling correction.

Parameters:

word The potentially misspelled word.

max_edit_distance Only consider words which are at most *max_edit_distance* edits from *word*. An edit is a character insertion, deletion, or the transposition of two adjacent characters (default is 2).

7.4.3.26 `Xapian::TermIterator Xapian::Database::spellings_begin () const`

An iterator which returns all the spelling correction targets.

This returns all the words which are considered as targets for the spelling correction algorithm. The frequency of each word is available as the term frequency of each entry in the returned iterator.

**7.4.3.27 `Xapian::TermIterator Xapian::Database::spellings_end () const`
[inline]**

Corresponding end iterator to [spellings_begin\(\)](#).

7.4.3.28 `Xapian::TermIterator Xapian::Database::synonyms_begin (const std::string & term) const`

An iterator which returns all the synonyms for a given term.

Parameters:

term The term to return synonyms for.

7.4.3.29 Xapian::TermIterator Xapian::Database::synonyms_end (const std::string &) const [inline]

Corresponding end iterator to synonyms_begin(term).

7.4.3.30 Xapian::TermIterator Xapian::Database::synonym_keys_begin (const std::string & prefix = "") const

An iterator which returns all terms which have synonyms.

Parameters:

prefix If non-empty, only terms with this prefix are returned.

7.4.3.31 Xapian::TermIterator Xapian::Database::synonym_keys_end (const std::string & = "") const [inline]

Corresponding end iterator to synonym_keys_begin(prefix).

7.4.3.32 std::string Xapian::Database::get_metadata (const std::string & key) const

Get the user-specified metadata associated with a given key.

User-specified metadata allows you to store arbitrary information in the form of (key,tag) pairs. See [WritableDatabase::set_metadata\(\)](#) for more information.

When invoked on a [Xapian::Database](#) object representing multiple databases, currently only the metadata for the first is considered but this behaviour may change in the future.

If there is no piece of metadata associated with the specified key, an empty string is returned (this applies even for backends which don't support metadata).

Empty keys are not valid, and specifying one will cause an exception.

Parameters:

key The key of the metadata item to access.

Returns:

The retrieved metadata item's value.

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if the key supplied is empty.

7.4.3.33 Xapian::TermIterator Xapian::Database::metadata_keys_begin (const std::string & *prefix* = "") const

An iterator which returns all user-specified metadata keys.

When invoked on a [Xapian::Database](#) object representing multiple databases, currently only the metadata for the first is considered but this behaviour may change in the future.

If the backend doesn't support metadata, then this method returns an iterator which compares equal to that returned by [metadata_keys_end\(\)](#).

Parameters:

prefix If non-empty, only keys with this prefix are returned.

Exceptions:

[Xapian::UnimplementedError](#) will be thrown if the backend implements user-specified metadata, but doesn't implement iterating its keys (currently this happens for the [InMemory](#) backend).

7.4.3.34 Xapian::TermIterator Xapian::Database::metadata_keys_end (const std::string & = "") const [inline]

Corresponding end iterator to [metadata_keys_begin\(\)](#).


The documentation for this class was generated from the following file:

- [xapian/database.h](#)

7.5 Xapian::DatabaseCorruptError Class Reference

[DatabaseCorruptError](#) indicates database corruption was detected.

Inheritance diagram for Xapian::DatabaseCorruptError:



Public Member Functions

- [DatabaseCorruptError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [DatabaseCorruptError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.5.1 Detailed Description

[DatabaseCorruptError](#) indicates database corruption was detected.

7.5.2 Constructor & Destructor Documentation

- 7.5.2.1** `Xapian::DatabaseCorruptError::DatabaseCorruptError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]`

General purpose constructor which allows setting errno.

- 7.5.2.2** `Xapian::DatabaseCorruptError::DatabaseCorruptError (const std::string & msg_, int errno_) [inline]`

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.6 Xapian::DatabaseCreateError Class Reference

[DatabaseCreateError](#) indicates a failure to create a database.

Inheritance diagram for Xapian::DatabaseCreateError:



Public Member Functions

- [DatabaseCreateError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [DatabaseCreateError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.6.1 Detailed Description

[DatabaseCreateError](#) indicates a failure to create a database.

7.6.2 Constructor & Destructor Documentation

7.6.2.1 Xapian::DatabaseCreateError::DatabaseCreateError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.6.2.2 Xapian::DatabaseCreateError::DatabaseCreateError (const std::string &msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.7 Xapian::DatabaseError Class Reference

[DatabaseError](#) indicates some sort of database related error.

Inheritance diagram for Xapian::DatabaseError:

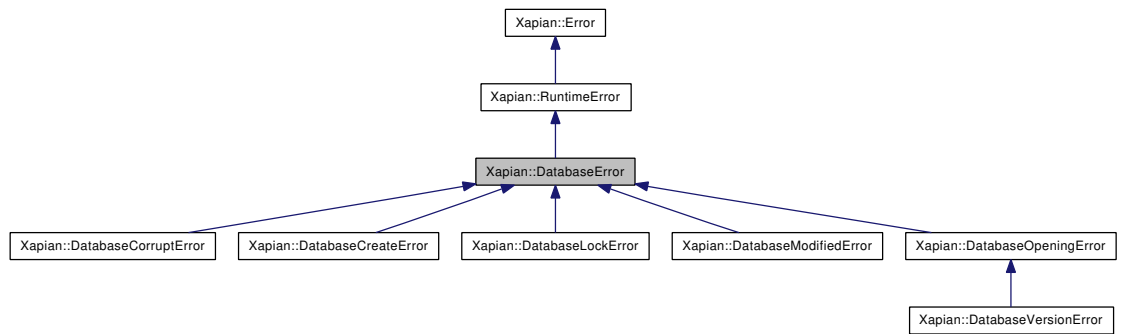

Public Member Functions

- [DatabaseError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [DatabaseError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.7.1 Detailed Description

[DatabaseError](#) indicates some sort of database related error.

7.7.2 Constructor & Destructor Documentation

7.7.2.1 Xapian::DatabaseError::DatabaseError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.7.2.2 Xapian::DatabaseError::DatabaseError (const std::string & msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.8 Xapian::DatabaseLockError Class Reference

[DatabaseLockError](#) indicates failure to lock a database.

Inheritance diagram for Xapian::DatabaseLockError:



Public Member Functions

- [DatabaseLockError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [DatabaseLockError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.8.1 Detailed Description

[DatabaseLockError](#) indicates failure to lock a database.

7.8.2 Constructor & Destructor Documentation

7.8.2.1 Xapian::DatabaseLockError::DatabaseLockError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.8.2.2 Xapian::DatabaseLockError::DatabaseLockError (const std::string &msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.9 Xapian::DatabaseModifiedError Class Reference

[DatabaseModifiedError](#) indicates a database was modified.

Inheritance diagram for Xapian::DatabaseModifiedError:



Public Member Functions

- [DatabaseModifiedError](#) (const std::string &msg_, const std::string &context_ = "", int errno_=0)
General purpose constructor which allows setting errno.
- [DatabaseModifiedError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.9.1 Detailed Description

[DatabaseModifiedError](#) indicates a database was modified.

To recover after catching this error, you need to call [Xapian::Database::reopen\(\)](#) on the [Database](#) and repeat the operation which failed.

7.9.2 Constructor & Destructor Documentation

7.9.2.1 Xapian::DatabaseModifiedError::DatabaseModifiedError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.9.2.2 Xapian::DatabaseModifiedError::DatabaseModifiedError (const std::string & msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.10 Xapian::DatabaseOpeningError Class Reference

[DatabaseOpeningError](#) indicates failure to open a database.

Inheritance diagram for Xapian::DatabaseOpeningError:

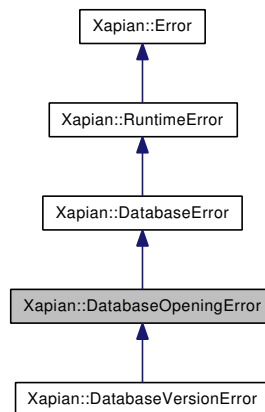

Public Member Functions

- [DatabaseOpeningError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)

General purpose constructor which allows setting errno.

- [DatabaseOpeningError](#) (const std::string &msg_, int errno_)

Construct from message and errno value.

7.10.1 Detailed Description

[DatabaseOpeningError](#) indicates failure to open a database.

7.10.2 Constructor & Destructor Documentation

- 7.10.2.1 Xapian::DatabaseOpeningError::DatabaseOpeningError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]**

General purpose constructor which allows setting errno.

7.10.2.2 Xapian::DatabaseOpeningError::DatabaseOpeningError (const std::string & *msg_*, int *errno_*) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.11 Xapian::DatabaseVersionError Class Reference

[DatabaseVersionError](#) indicates that a database is in an unsupported format.

Inheritance diagram for Xapian::DatabaseVersionError:

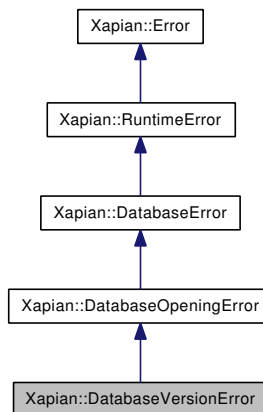

Public Member Functions

- [DatabaseVersionError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)

General purpose constructor which allows setting errno.

- [DatabaseVersionError](#) (const std::string &msg_, int errno_)

Construct from message and errno value.

7.11.1 Detailed Description

[DatabaseVersionError](#) indicates that a database is in an unsupported format.

From time to time, new versions of [Xapian](#) will require the database format to be changed, to allow new information to be stored or new optimisations to be performed. Backwards compatibility will sometimes be maintained, so that new versions of [Xapian](#) can open old databases, but in some cases [Xapian](#) will be unable to open a database because it is in too old (or new) a format. This can be resolved either by upgrading or downgrading the version of [Xapian](#) in use, or by rebuilding the database from scratch with the current version of [Xapian](#).

7.11.2 Constructor & Destructor Documentation

7.11.2.1 Xapian::DatabaseVersionError::DatabaseVersionError (const std::string & *msg_*, const std::string & *context_* = "", int *errno_* = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.11.2.2 Xapian::DatabaseVersionError::DatabaseVersionError (const std::string & *msg_*, int *errno_*) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.12 Xapian::DateValueRangeProcessor Class Reference

Handle a date range.

Inheritance diagram for Xapian::DateValueRangeProcessor:



Public Member Functions

- [DateValueRangeProcessor](#) ([Xapian::valueno](#) valno_, bool prefer_mdy_=false, int epoch_year_=1970)

Constructor.

- [Xapian::valueno operator\(\)](#) (std::string &begin, std::string &end)

Check for a valid range of this type.

7.12.1 Detailed Description

Handle a date range.

Begin and end must be dates in a recognised format.

7.12.2 Constructor & Destructor Documentation

7.12.2.1 Xapian::DateValueRangeProcessor::DateValueRangeProcessor (Xapian::valueno valno_, bool prefer_mdy_ = false, int epoch_year_ = 1970) [inline]

Constructor.

Parameters:

valno_ The value number to return from operator().

prefer_mdy_ Should ambiguous dates be interpreted as month/day/year rather than day/month/year? (default: false)

epoch_year_ Year to use as the epoch for dates with 2 digit years (default: 1970, so 1/1/69 is 2069 while 1/1/70 is 1970).

7.12.3 Member Function Documentation

7.12.3.1 Xapian::valueno Xapian::DateValueRangeProcessor::operator() (std::string & *begin*, std::string & *end*) [virtual]

Check for a valid range of this type.

If BEGIN..END is a sensible date range, this method returns the value number of range filter on. Otherwise it returns [Xapian::BAD_VALUENO](#).

Implements [Xapian::ValueRangeProcessor](#).


The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.13 Xapian::DocNotFoundError Class Reference

Indicates an attempt to access a document not present in the database.

Inheritance diagram for Xapian::DocNotFoundError:



Public Member Functions

- [DocNotFoundError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [DocNotFoundError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.13.1 Detailed Description

Indicates an attempt to access a document not present in the database.

7.13.2 Constructor & Destructor Documentation

7.13.2.1 Xapian::DocNotFoundError::DocNotFoundError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.13.2.2 Xapian::DocNotFoundError::DocNotFoundError (const std::string &msg_, int errno_) [inline]

Construct from message and errno value.

The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.14 Xapian::Document Class Reference

A handle representing a document in a [Xapian](#) database.

Public Member Functions

- [Document](#) (const [Document](#) &other)
Copying is allowed.
- void [operator=](#) (const [Document](#) &other)
Assignment is allowed.
- [Document](#) ()
Make a new empty Document.
- [~Document](#) ()
Destructor.
- std::string [get_value](#) ([Xapian::valueno](#) valueno) const
Get value by number.
- void [add_value](#) ([Xapian::valueno](#) valueno, const std::string &value)
Add a new value.
- void [remove_value](#) ([Xapian::valueno](#) valueno)
Remove any value with the given number.
- void [clear_values](#) ()
Remove all values associated with the document.
- std::string [get_data](#) () const
Get data stored in the document.
- void [set_data](#) (const std::string &data)
Set data stored in the document.
- void [add_posting](#) (const std::string &tname, [Xapian::termpos](#) tpos, [Xapian::termcount](#) wdfinc=1)
Add an occurrence of a term at a particular position.
- void [add_term](#) (const std::string &tname, [Xapian::termcount](#) wdfinc=1)
Add a term to the document, without positional information.
- void [add_boolean_term](#) (const std::string &term)
Add a boolean filter term to the document.

- void `remove_posting` (const std::string &tname, `Xapian::termpos` tpos, `Xapian::termcount` wdfdec=1)
Remove a posting of a term from the document.
- void `remove_term` (const std::string &tname)
Remove a term and all postings associated with it.
- void `clear_terms` ()
Remove all terms (and postings) from the document.
- `Xapian::termcount` `termlist_count` () const
The length of the termlist - i.e.
- `TermIterator` `termlist_begin` () const
Iterator for the terms in this document.
- `TermIterator` `termlist_end` () const
Equivalent end iterator for `termlist_begin()`.
- `Xapian::termcount` `values_count` () const
Count the values in this document.
- `ValueIterator` `values_begin` () const
Iterator for the values in this document.
- `ValueIterator` `values_end` () const
Equivalent end iterator for `values_begin()`.
- `docid` `get_docid` () const
Get the document id which is associated with this document (if any).
- std::string `get_description` () const
Return a string describing this object.

7.14.1 Detailed Description

A handle representing a document in a `Xapian` database.

The `Document` class fetches information from the database lazily. Usually this behaviour isn't visible to users (except for the speed benefits), but if the document in the database is modified or deleted, then preexisting `Document` objects may return the old or new versions of data (or throw `Xapian::DocNotFoundError` in the case of deletion).

Since `Database` objects work on a snapshot of the database's state, the situation above can only happen with a `WritableDatabase` object, or if you call `Database::reopen()` on a `Database` object.

We recommend you avoid designs where this behaviour is an issue.

7.14.2 Constructor & Destructor Documentation

7.14.2.1 Xapian::Document::Document (const Document & *other*)

Copying is allowed.

The internals are reference counted, so copying is cheap.

7.14.2.2 Xapian::Document::Document ()

Make a new empty [Document](#).

7.14.2.3 Xapian::Document::~~Document ()

Destructor.

7.14.3 Member Function Documentation

7.14.3.1 void Xapian::Document::operator= (const Document & *other*)

Assignment is allowed.

The internals are reference counted, so assignment is cheap.

7.14.3.2 std::string Xapian::Document::get_value (Xapian::valueno *valueno*) const

Get value by number.

Returns an empty string if no value with the given number is present in the document.

Parameters:

valueno The number of the value.

7.14.3.3 void Xapian::Document::add_value (Xapian::valueno *valueno*, const std::string & *value*)

Add a new value.

The new value will replace any existing value with the same number (or if the new value is empty, it will remove any existing value with the same number).

7.14.3.4 void Xapian::Document::remove_value (Xapian::valueno *valueno*)

Remove any value with the given number.

7.14.3.5 void Xapian::Document::clear_values ()

Remove all values associated with the document.

7.14.3.6 std::string Xapian::Document::get_data () const

Get data stored in the document.

This is a potentially expensive operation, and shouldn't normally be used in a match decider functor. Put data for use by match deciders in a value instead.

7.14.3.7 void Xapian::Document::set_data (const std::string & data)

Set data stored in the document.

7.14.3.8 void Xapian::Document::add_posting (const std::string & tname, Xapian::termpos tpos, Xapian::termcount wdfinc = 1)

Add an occurrence of a term at a particular position.

Multiple occurrences of the term at the same position are represented only once in the positional information, but do increase the wdf.

If the term is not already in the document, it will be added to it.

Parameters:

tname The name of the term.

tpos The position of the term.

wdfinc The increment that will be applied to the wdf for this term.

7.14.3.9 void Xapian::Document::add_term (const std::string & tname, Xapian::termcount wdfinc = 1)

Add a term to the document, without positional information.

Any existing positional information for the term will be left unmodified.

Parameters:

tname The name of the term.

wdfinc The increment that will be applied to the wdf for this term (default: 1).

7.14.3.10 void Xapian::Document::add_boolean_term (const std::string & term) [inline]

Add a boolean filter term to the document.

This method adds *term* to the document with wdf of 0 - this is generally what you want for a term used for boolean filtering as the wdf of such terms is ignored, and it doesn't make sense for them to contribute to the document's length.

If the specified term already indexes this document, this method has no effect.

It is exactly the same as `add_term(term, 0)`.

This method was added in [Xapian 1.0.18](#).

Parameters:

term The term to add.

7.14.3.11 void Xapian::Document::remove_posting (const std::string & *tname*, Xapian::termpos *tpos*, Xapian::termcount *wdfdec* = 1)

Remove a posting of a term from the document.

Note that the term will still index the document even if all occurrences are removed. To remove a term from a document completely, use [remove_term\(\)](#).

Parameters:

tname The name of the term.

tpos The position of the term.

wdfdec The decrement that will be applied to the wdf when removing this posting. The wdf will not go below the value of 0.

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if the term is not at the position specified in the position list for this term in this document.

[Xapian::InvalidArgumentError](#) will be thrown if the term is not in the document

7.14.3.12 void Xapian::Document::remove_term (const std::string & *tname*)

Remove a term and all postings associated with it.

Parameters:

tname The name of the term.

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if the term is not in the document

7.14.3.13 void Xapian::Document::clear_terms ()

Remove all terms (and postings) from the document.

7.14.3.14 Xapian::termcount Xapian::Document::termlist_count () const

The length of the termlist - i.e.
the number of different terms which index this document.

7.14.3.15 TermIterator Xapian::Document::termlist_begin () const

Iterator for the terms in this document.

7.14.3.16 TermIterator Xapian::Document::termlist_end () const `[inline]`

Equivalent end iterator for [termlist_begin\(\)](#).

7.14.3.17 Xapian::termcount Xapian::Document::values_count () const

Count the values in this document.

7.14.3.18 ValueIterator Xapian::Document::values_begin () const

Iterator for the values in this document.

7.14.3.19 ValueIterator Xapian::Document::values_end () const

Equivalent end iterator for [values_begin\(\)](#).

7.14.3.20 docid Xapian::Document::get_docid () const

Get the document id which is associated with this document (if any).

NB If multiple databases are being searched together, then this will be the document id in the individual database, not the merged database!

Returns:

If this document came from a database, return the document id in that database.
Otherwise, return 0 (in [Xapian](#) 1.0.22/1.2.4 or later; prior to this the returned value was uninitialised).

7.14.3.21 std::string Xapian::Document::get_description () const

Return a string describing this object.

The documentation for this class was generated from the following file:

- [xapian/document.h](#)

7.15 Xapian::Enquire Class Reference

This class provides an interface to the information retrieval system for the purpose of searching.

Public Types

- enum **docid_order** { **ASCENDING** = 1, **DESCENDING** = 0, **DONT_CARE** = 2 }

Public Member Functions

- **Enquire** (const **Enquire** &other)
Copying is allowed (and is cheap).
- void **operator=** (const **Enquire** &other)
Assignment is allowed (and is cheap).
- **Enquire** (const **Database** &database, **ErrorHandler** *errorhandler_=0)
*Create a **Xapian::Enquire** object.*
- **~Enquire** ()
*Close the **Xapian::Enquire** object.*
- void **set_query** (const **Xapian::Query** &query, **Xapian::termcount** qlen=0)
Set the query to run.
- const **Xapian::Query** & **get_query** () const
Get the query which has been set.
- void **set_weighting_scheme** (const **Weight** &weight_)
Set the weighting scheme to use for queries.
- void **set_collapse_key** (**Xapian::valueno** collapse_key)
Set the collapse key to use for queries.
- void **set_docid_order** (docid_order order)
*Set the direction in which documents are ordered by document id in the returned **MSet**.*
- void **set_cutoff** (**Xapian::percent** percent_cutoff, **Xapian::weight** weight_cutoff=0)
Set the percentage and/or weight cutoffs.
- void **set_sort_by_relevance** ()
Set the sorting to be by relevance only.

- void `set_sort_by_value` (`Xapian::valueno` sort_key, bool reverse=true)
Set the sorting to be by value only.
- void `set_sort_by_key` (`Xapian::Sorter` *sorter, bool reverse=true)
Set the sorting to be by key generated from values only.
- void `set_sort_by_value_then_relevance` (`Xapian::valueno` sort_key, bool reverse=true)
Set the sorting to be by value, then by relevance for documents with the same value.
- void `set_sort_by_key_then_relevance` (`Xapian::Sorter` *sorter, bool reverse=true)
Set the sorting to be by keys generated from values, then by relevance for documents with identical keys.
- void `set_sort_by_relevance_then_value` (`Xapian::valueno` sort_key, bool reverse=true)
Set the sorting to be by relevance then value.
- void `set_sort_by_relevance_then_key` (`Xapian::Sorter` *sorter, bool reverse=true)
Set the sorting to be by relevance, then by keys generated from values.
- `MSet` `get_mset` (`Xapian::doccount` first, `Xapian::doccount` maxitems, `Xapian::doccount` checkatleast=0, const `RSet` *omrset=0, const `MatchDecider` *mdecider=0) const
Get (a portion of) the match set for the current query.
- `MSet` `get_mset` (`Xapian::doccount` first, `Xapian::doccount` maxitems, `Xapian::doccount` checkatleast, const `RSet` *omrset, const `MatchDecider` *mdecider, const `MatchDecider` *matchspy) const
- `MSet` `get_mset` (`Xapian::doccount` first, `Xapian::doccount` maxitems, const `RSet` *omrset, const `MatchDecider` *mdecider=0) const
- `ESet` `get_eset` (`Xapian::termcount` maxitems, const `RSet` &omrset, int flags=0, double k=1.0, const `Xapian::ExpandDecider` *edecider=0) const
Get the expand set for the given rset.
- `ESet` `get_eset` (`Xapian::termcount` maxitems, const `RSet` &omrset, const `Xapian::ExpandDecider` *edecider) const
Get the expand set for the given rset.
- `TermIterator` `get_matching_terms_begin` (`Xapian::docid` did) const
Get terms which match a given document, by document id.
- `TermIterator` `get_matching_terms_end` (`Xapian::docid`) const
End iterator corresponding to `get_matching_terms_begin()`.

- [TermIterator](#) [get_matching_terms_begin](#) (const [MSetIterator](#) &it) const
Get terms which match a given document, by match set item.
- [TermIterator](#) [get_matching_terms_end](#) (const [MSetIterator](#) &) const
End iterator corresponding to [get_matching_terms_begin](#)().
- void [register_match_decider](#) (const std::string &name, const [MatchDecider](#) *mdecider=NULL)
Register a [MatchDecider](#).
- std::string [get_description](#) () const
Return a string describing this object.

Public Attributes

- Xapian::Internal::RefCntPtr< Internal > **internal**

Static Public Attributes

- static const int **INCLUDE_QUERY_TERMS** = 1
- static const int **USE_EXACT_TERMREQ** = 2
- static const int [include_query_terms](#) = 1
*Deprecated in [Xapian](#) 1.0.0, use **INCLUDE_QUERY_TERMS** instead.*
- static const int [use_exact_termreq](#) = 2
*Deprecated in [Xapian](#) 1.0.0, use **USE_EXACT_TERMREQ** instead.*

7.15.1 Detailed Description

This class provides an interface to the information retrieval system for the purpose of searching.

Databases are usually opened lazily, so exceptions may not be thrown where you would expect them to be. You should catch [Xapian::Error](#) exceptions when calling any method in [Xapian::Enquire](#).

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if an invalid argument is supplied, for example, an unknown database type.

7.15.2 Constructor & Destructor Documentation

7.15.2.1 Xapian::Enquire::Enquire (const Enquire & *other*)

Copying is allowed (and is cheap).

7.15.2.2 Xapian::Enquire::Enquire (const Database & *database*, ErrorHandler * *errorhandler_* = 0) [explicit]

Create a [Xapian::Enquire](#) object.

This specification cannot be changed once the [Xapian::Enquire](#) is opened: you must create a new [Xapian::Enquire](#) object to access a different database, or set of databases.

The database supplied must have been initialised (ie, must not be the result of calling the Database::Database() constructor). If you need to handle a situation where you have no index gracefully, a database created with [InMemory::open\(\)](#) can be passed here, which represents a completely empty database.

Parameters:

database Specification of the database or databases to use.

errorhandler_ A pointer to the error handler to use. Ownership of the object pointed to is not assumed by the [Xapian::Enquire](#) object - the user should delete the [Xapian::ErrorHandler](#) object after the [Xapian::Enquire](#) object is deleted. To use no error handler, this parameter should be 0.

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if an initialised [Database](#) object is supplied.

7.15.2.3 Xapian::Enquire::~~Enquire ()

Close the [Xapian::Enquire](#) object.

7.15.3 Member Function Documentation

7.15.3.1 void Xapian::Enquire::operator= (const Enquire & *other*)

Assignment is allowed (and is cheap).

7.15.3.2 void Xapian::Enquire::set_query (const Xapian::Query & *query*, Xapian::termcount *qlen* = 0)

Set the query to run.

Parameters:

query the new query to run.

qlen the query length to use in weight calculations - by default the sum of the wqf of all terms is used.

7.15.3.3 const Xapian::Query& Xapian::Enquire::get_query () const

Get the query which has been set.

This is only valid after [set_query\(\)](#) has been called.

Exceptions:

[Xapian::InvalidArgumentError](#) will be thrown if query has not yet been set.

7.15.3.4 void Xapian::Enquire::set_weighting_scheme (const Weight & weighting_)

Set the weighting scheme to use for queries.

Parameters:

weight_ the new weighting scheme. If no weighting scheme is specified, the default is BM25 with the default parameters.

7.15.3.5 void Xapian::Enquire::set_collapse_key (Xapian::value no collapse_key)

Set the collapse key to use for queries.

Parameters:

collapse_key value number to collapse on - at most one [MSet](#) entry with each particular value will be returned.

The entry returned will be the best entry with that particular value (highest weight or highest sorting key).

An example use might be to create a value for each document containing an MD5 hash of the document contents. Then duplicate documents from different sources can be eliminated at search time (it's better to eliminate duplicates at index time, but this may not be always be possible - for example the search may be over more than one [Xapian](#) database).

Another use is to group matches in a particular category (e.g. you might collapse a mailing list search on the Subject: so that there's only one result per discussion thread). In this case you can use [get_collapse_count\(\)](#) to give the user some idea how

many other results there are. And if you index the Subject: as a boolean term as well as putting it in a value, you can offer a link to a non-collapsed search restricted to that thread using a boolean filter.

(default is [Xapian::BAD_VALUENO](#) which means no collapsing).

7.15.3.6 void Xapian::Enquire::set_docid_order (docid_order order)

Set the direction in which documents are ordered by document id in the returned [MSet](#).

This order only has an effect on documents which would otherwise have equal rank. For a weighted probabilistic match with no sort value, this means documents with equal weight. For a boolean match, with no sort value, this means all documents. And if a sort value is used, this means documents with equal sort value (and also equal weight if ordering on relevance after the sort).

Parameters:

order This can be:

- [Xapian::Enquire::ASCENDING](#) docids sort in ascending order (default)
- [Xapian::Enquire::DESCENDING](#) docids sort in descending order
- [Xapian::Enquire::DONT_CARE](#) docids sort in whatever order is most efficient for the backend

Note: If you add documents in strict date order, then a boolean search - i.e. `set_weighting_scheme(Xapian::BoolWeight())` - with `set_docid_order(Xapian::Enquire::DESCENDING)` is a very efficient way to perform "sort by date, newest first".

7.15.3.7 void Xapian::Enquire::set_cutoff (Xapian::percent percent_cutoff, Xapian::weight weight_cutoff = 0)

Set the percentage and/or weight cutoffs.

Parameters:

percent_cutoff Minimum percentage score for returned documents. If a document has a lower percentage score than this, it will not appear in the [MSet](#). If your intention is to return only matches which contain all the terms in the query, then it's more efficient to use [Xapian::Query::OP_AND](#) instead of [Xapian::Query::OP_OR](#) in the query than to use `set_cutoff(100)`. (default 0 => no percentage cut-off).

weight_cutoff Minimum weight for a document to be returned. If a document has a lower score than this, it will not appear in the [MSet](#). It is usually only possible to choose an appropriate weight for cutoff based on the results of a previous run of the same query; this is thus mainly useful for alerting operations. The other potential use is with a user specified weighting scheme. (default 0 => no weight cut-off).

7.15.3.8 void Xapian::Enquire::set_sort_by_relevance ()

Set the sorting to be by relevance only.

This is the default.

7.15.3.9 void Xapian::Enquire::set_sort_by_value (Xapian::valueno *sort_key*, bool *reverse* = true)

Set the sorting to be by value only.

Note that sorting by values uses a string comparison, so to use this to sort by a numeric value you'll need to store the numeric values in a manner which sorts appropriately. For example, you could use [Xapian::sortable_serialise\(\)](#) (which works for floating point numbers as well as integers), or store numbers padded with leading zeros or spaces, or with the number of digits prepended.

Parameters:

sort_key value number to sort on.

reverse If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

7.15.3.10 void Xapian::Enquire::set_sort_by_key (Xapian::Sorter * *sorter*, bool *reverse* = true)

Set the sorting to be by key generated from values only.

Parameters:

sorter The functor to use for generating keys.

reverse If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

7.15.3.11 void Xapian::Enquire::set_sort_by_value_then_relevance (Xapian::valueno *sort_key*, bool *reverse* = true)

Set the sorting to be by value, then by relevance for documents with the same value.

Note that sorting by values uses a string comparison, so to use this to sort by a numeric value you'll need to store the numeric values in a manner which sorts appropriately. For example, you could use [Xapian::sortable_serialise\(\)](#) (which works for floating point numbers as well as integers), or store numbers padded with leading zeros or spaces, or with the number of digits prepended.

Parameters:

sort_key value number to sort on.

reverse If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

**7.15.3.12 void Xapian::Enquire::set_sort_by_key_then_relevance
(Xapian::Sorter * *sorter*, bool *reverse* = true)**

Set the sorting to be by keys generated from values, then by relevance for documents with identical keys.

Parameters:

sorter The functor to use for generating keys.

reverse If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

**7.15.3.13 void Xapian::Enquire::set_sort_by_relevance_then_value
(Xapian::value *sort_key*, bool *reverse* = true)**

Set the sorting to be by relevance then value.

Note that sorting by values uses a string comparison, so to use this to sort by a numeric value you'll need to store the numeric values in a manner which sorts appropriately. For example, you could use [Xapian::sortable_serialise\(\)](#) (which works for floating point numbers as well as integers), or store numbers padded with leading zeros or spaces, or with the number of digits prepended.

Note that with the default BM25 weighting scheme parameters, non-identical documents will rarely have the same weight, so this setting will give very similar results to [set_sort_by_relevance\(\)](#). It becomes more useful with particular BM25 parameter settings (e.g. BM25Weight(1,0,1,0,0)) or custom weighting schemes.

Parameters:

sort_key value number to sort on.

reverse If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

**7.15.3.14 void Xapian::Enquire::set_sort_by_relevance_then_key
(Xapian::Sorter * *sorter*, bool *reverse* = true)**

Set the sorting to be by relevance, then by keys generated from values.

Note that with the default BM25 weighting scheme parameters, non-identical documents will rarely have the same weight, so this setting will give very similar results to [set_sort_by_relevance\(\)](#). It becomes more useful with particular BM25 parameter settings (e.g. `BM25Weight(1,0,1,0,0)`) or custom weighting schemes.

Parameters:

- sorter** The functor to use for generating keys.
- reverse** If true, reverses the sort order. (default true, but this default is confusing and deprecated in 1.1.0, so we recommend specifying this parameter explicitly).

7.15.3.15 MSet Xapian::Enquire::get_mset (Xapian::doccount *first*, Xapian::doccount *maxitems*, Xapian::doccount *checkatleast* = 0, const RSet * *omrset* = 0, const MatchDecider * *mdecider* = 0) const

Get (a portion of) the match set for the current query.

Parameters:

- first** the first item in the result set to return. A value of zero corresponds to the first item returned being that with the highest score. A value of 10 corresponds to the first 10 items being ignored, and the returned items starting at the eleventh.
- maxitems** the maximum number of items to return. If you want all matches, then you can pass the result of calling `get_doccount()` on the [Database](#) object (though if you are doing this so you can filter results, you are likely to get much better performance by using Xapian's match-time filtering features instead). You can pass 0 for maxitems which will give you an empty [MSet](#) with valid statistics (such as `get_matches_estimated()`) calculated without looking at any postings, which is very quick, but means the estimates may be more approximate and the bounds may be much looser.
- checkatleast** the minimum number of items to check. Because the matcher optimises, it won't consider every document which might match, so the total number of matches is estimated. Setting `checkatleast` forces it to consider at least this many matches and so allows for reliable paging links.
- omrset** the relevance set to use when performing the query.
- mdecider** a decision functor to use to decide whether a given document should be put in the [MSet](#).
- matchspy** a decision functor to use to decide whether a given document should be put in the [MSet](#). The `matchspy` is applied to every document which is a potential candidate for the [MSet](#), so if there are `checkatleast` or more such documents, the `matchspy` will see at least `checkatleast`. The `mdecider` is assumed to be a relatively expensive test so may be applied in a lazier fashion.

Returns:

A [Xapian::MSet](#) object containing the results of the query.

Exceptions:

[*Xapian::InvalidArgumentError*](#) See class documentation.

7.15.3.16 `ESet Xapian::Enquire::get_eset (Xapian::termcount maxitems,
const RSet & omrset, int flags = 0, double k = 1.0, const
Xapian::ExpandDecider * edecider = 0) const`

Get the expand set for the given rset.

Parameters:

maxitems the maximum number of items to return.

omrset the relevance set to use when performing the expand operation.

flags zero or more of these values |'ed together:

- `Xapian::Enquire::INCLUDE_QUERY_TERMS` query terms may be returned from expand
- `Xapian::Enquire::USE_EXACT_TERM_FREQ` for multi dbs, calculate the exact termfreq; otherwise an approximation is used which can greatly improve efficiency, but still returns good results.

k the parameter k in the query expansion algorithm (default is 1.0)

edecider a decision functor to use to decide whether a given term should be put in the [ESet](#)

Returns:

An [ESet](#) object containing the results of the expand.

Exceptions:

[*Xapian::InvalidArgumentError*](#) See class documentation.

7.15.3.17 `ESet Xapian::Enquire::get_eset (Xapian::termcount maxitems, const
RSet & omrset, const Xapian::ExpandDecider * edecider) const`
[inline]

Get the expand set for the given rset.

Parameters:

maxitems the maximum number of items to return.

omrset the relevance set to use when performing the expand operation.

edecider a decision functor to use to decide whether a given term should be put in the [ESet](#)

Returns:

An [ESet](#) object containing the results of the expand.

Exceptions:

[*Xapian::InvalidArgumentError*](#) See class documentation.

7.15.3.18 TermIterator Xapian::Enquire::get_matching_terms_begin (Xapian::docid *did*) const

Get terms which match a given document, by document id.

This method returns the terms in the current query which match the given document.

It is possible for the document to have been removed from the database between the time it is returned in an [MSet](#), and the time that this call is made. If possible, you should specify an [MSetIterator](#) instead of a [Xapian::docid](#), since this will enable database backends with suitable support to prevent this occurring.

Note that a query does not need to have been run in order to make this call.

Parameters:

did The document id for which to retrieve the matching terms.

Returns:

An iterator returning the terms which match the document. The terms will be returned (as far as this makes any sense) in the same order as the terms in the query. Terms will not occur more than once, even if they do in the query.

Exceptions:

[*Xapian::InvalidArgumentError*](#) See class documentation.

[*Xapian::DocNotFoundError*](#) The document specified could not be found in the database.

7.15.3.19 TermIterator Xapian::Enquire::get_matching_terms_end (Xapian::docid) const [inline]

End iterator corresponding to [get_matching_terms_begin\(\)](#).

7.15.3.20 TermIterator Xapian::Enquire::get_matching_terms_begin (const MSetIterator & *it*) const

Get terms which match a given document, by match set item.

This method returns the terms in the current query which match the given document.

If the underlying database has suitable support, using this call (rather than passing a [Xapian::docid](#)) will enable the system to ensure that the correct data is returned, and that the document has not been deleted or changed since the query was performed.

Parameters:

it The iterator for which to retrieve the matching terms.

Returns:

An iterator returning the terms which match the document. The terms will be returned (as far as this makes any sense) in the same order as the terms in the query. Terms will not occur more than once, even if they do in the query.

Exceptions:

[*Xapian::InvalidArgumentError*](#) See class documentation.

[*Xapian::DocNotFoundError*](#) The document specified could not be found in the database.

7.15.3.21 `TermIterator Xapian::Enquire::get_matching_terms_end (const MSetIterator &) const` [inline]

End iterator corresponding to [get_matching_terms_begin\(\)](#).

7.15.3.22 `void Xapian::Enquire::register_match_decider (const std::string & name, const MatchDecider * mdecider = NULL)`

Register a [MatchDecider](#).

This is used to associate a name with a matchdecider.

Deprecated

This method is deprecated. It was added long ago with the intention that it would allow the remote backend to support use of [MatchDecider](#) objects, but there's a better approach.

Parameters:

name The name to register this matchdecider as.

mdecider The matchdecider. If omitted, then remove any matchdecider registered with this name.

7.15.3.23 `std::string Xapian::Enquire::get_description () const`

Return a string describing this object.

7.15.4 Member Data Documentation

7.15.4.1 `const int Xapian::Enquire::include_query_terms = 1` [static]

Deprecated in [Xapian](#) 1.0.0, use INCLUDE_QUERY_TERMS instead.

7.15.4.2 `const int Xapian::Enquire::use_exact_termfreq = 2` `[static]`

Deprecated in [Xapian 1.0.0](#), use `USE_EXACT_TERM_FREQ` instead.


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.16 Xapian::Error Class Reference

All exceptions thrown by [Xapian](#) are subclasses of [Xapian::Error](#).

Inheritance diagram for [Xapian::Error](#):

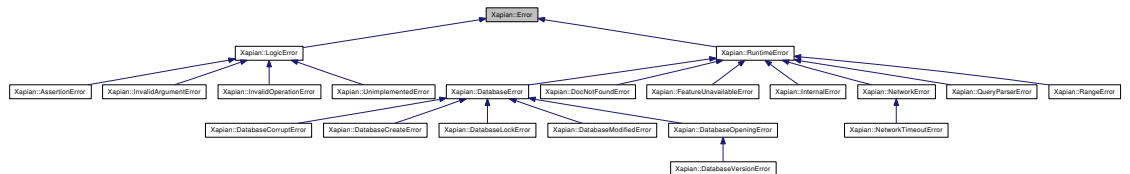

Public Member Functions

- `const char * get_type () const`
The type of this error (e.g. "DocNotFoundError").
- `const std::string & get_msg () const`
Message giving details of the error, intended for human consumption.
- `const std::string & get_context () const`
Optional context information.
- `const char * get_error_string () const`
Returns any system error string associated with this exception.
- `int get_errno () const`
Optional value of 'errno' associated with this error.
- `std::string get_description () const`
Return a string describing this object.

7.16.1 Detailed Description

All exceptions thrown by [Xapian](#) are subclasses of [Xapian::Error](#).

This class can not be instantiated directly - instead a subclass should be used.

7.16.2 Member Function Documentation

7.16.2.1 `const char* Xapian::Error::get_type () const` [inline]

The type of this error (e.g. "DocNotFoundError").

7.16.2.2 `const std::string& Xapian::Error::get_msg () const` [inline]

Message giving details of the error, intended for human consumption.

7.16.2.3 `const std::string& Xapian::Error::get_context () const` [inline]

Optional context information.

This context is intended for use by [Xapian::ErrorHandler](#) (for example so it can know which remote server is unreliable and report the problem and remove that server from those being searched). But it's typically a plain-text string, and so also fit for human consumption.

7.16.2.4 `const char* Xapian::Error::get_error_string () const`

Returns any system error string associated with this exception.

The system error string may come from `errno`, `h_errno` (on UNIX), or `GetLastError()` (on MS Windows). If there is no associated system error string, `NULL` is returned.

7.16.2.5 `int Xapian::Error::get_errno () const` [inline]

Optional value of 'errno' associated with this error.

If no 'errno' value is associated, returns 0. If the returned value is negative, it's a platform-specific error code (on UNIX, `-h_errno`; on MS Windows, `-GetLastError()`).

Deprecated

This method is deprecated, because `errno` values aren't portable between platforms, so we can't serialise them when passing exceptions from a remote server to a client. Use the [get_error_string\(\)](#) method instead.

7.16.2.6 `std::string Xapian::Error::get_description () const`

Return a string describing this object.

The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.17 Xapian::ErrorHandler Class Reference

Decide if a [Xapian::Error](#) exception should be ignored.

Public Member Functions

- [ErrorHandler](#) ()
Default constructor.
- virtual [~ErrorHandler](#) ()
We require a virtual destructor because we have virtual methods.
- void [operator\(\)](#) ([Xapian::Error](#) &error)
Handle a [Xapian::Error](#) object.

7.17.1 Detailed Description

Decide if a [Xapian::Error](#) exception should be ignored.

You can create your own subclass of this class and pass in an instance of it when you construct a [Xapian::Enquire](#) object. [Xapian::Error](#) exceptions which happen during the match process are passed to this object and it can decide whether they should propagate or whether [Enquire](#) should attempt to continue.

The motivation is to allow searching over remote databases to handle a remote server which has died (both to allow results to be returned, and also so that such errors can be logged and dead servers temporarily removed from use).

7.17.2 Constructor & Destructor Documentation

7.17.2.1 Xapian::ErrorHandler::ErrorHandler () [inline]

Default constructor.

7.17.2.2 virtual Xapian::ErrorHandler::~~ErrorHandler () [virtual]

We require a virtual destructor because we have virtual methods.

7.17.3 Member Function Documentation

7.17.3.1 void Xapian::ErrorHandler::operator() (Xapian::Error & error)

Handle a [Xapian::Error](#) object.

This method is called when a [Xapian::Error](#) object is thrown and caught inside [Enquire](#). If this is the first [ErrorHandler](#) that the [Error](#) has been passed to, then the `handle_error()` virtual method is called, which allows the API user to decide how to handle the error.

Parameters:

error The [Xapian::Error](#) object under consideration.

The documentation for this class was generated from the following file:

- [xapian/errorhandler.h](#)

7.18 Xapian::ESet Class Reference

Class representing an ordered set of expand terms (an [ESet](#)).

Public Member Functions

- [ESet](#) ()
Construct an empty [ESet](#).
- [~ESet](#) ()
Destructor.
- [ESet](#) (const [ESet](#) &other)
Copying is allowed (and is cheap).
- void [operator=](#) (const [ESet](#) &other)
Assignment is allowed (and is cheap).
- [Xapian::termcount](#) [get_ebound](#) () const
A lower bound on the number of terms which are in the full set of results of the expand.
- [Xapian::termcount](#) [size](#) () const
The number of terms in this E-Set.
- [Xapian::termcount](#) [max_size](#) () const
Required to allow use as an STL container.
- bool [empty](#) () const
Test if this E-Set is empty.
- void [swap](#) ([ESet](#) &other)
Swap the E-Set we point to with another.
- [ESetIterator](#) [begin](#) () const
Iterator for the terms in this E-Set.
- [ESetIterator](#) [end](#) () const
End iterator corresponding to [begin\(\)](#).
- [ESetIterator](#) [back](#) () const
Iterator pointing to the last element of this E-Set.
- [ESetIterator](#) [operator\[\]](#) ([Xapian::termcount](#) i) const
This returns the term at position i in this E-Set.
- std::string [get_description](#) () const

Return a string describing this object.

Public Attributes

- Xapian::Internal::RefCntPtr< Internal > **internal**

7.18.1 Detailed Description

Class representing an ordered set of expand terms (an [ESet](#)).

This set represents the results of an expand operation, which is performed by [Xapian::Enquire::get_eset\(\)](#).

7.18.2 Constructor & Destructor Documentation

7.18.2.1 Xapian::ESet::ESet ()

Construct an empty [ESet](#).

7.18.2.2 Xapian::ESet::~~ESet ()

Destructor.

7.18.2.3 Xapian::ESet::ESet (const ESet & *other*)

Copying is allowed (and is cheap).

7.18.3 Member Function Documentation

7.18.3.1 void Xapian::ESet::operator= (const ESet & *other*)

Assignment is allowed (and is cheap).

7.18.3.2 Xapian::termcount Xapian::ESet::get_ebound () const

A lower bound on the number of terms which are in the full set of results of the expand.

This will be greater than or equal to [size\(\)](#)

7.18.3.3 Xapian::termcount Xapian::ESet::size () const

The number of terms in this E-Set.

7.18.3.4 Xapian::termcount Xapian::ESet::max_size () const `[inline]`

Required to allow use as an STL container.

7.18.3.5 bool Xapian::ESet::empty () const

Test if this E-Set is empty.

7.18.3.6 void Xapian::ESet::swap (ESet & *other*)

Swap the E-Set we point to with another.

7.18.3.7 ESetIterator Xapian::ESet::begin () const

Iterator for the terms in this E-Set.

7.18.3.8 ESetIterator Xapian::ESet::end () const

End iterator corresponding to [begin\(\)](#).

7.18.3.9 ESetIterator Xapian::ESet::back () const

Iterator pointing to the last element of this E-Set.

7.18.3.10 ESetIterator Xapian::ESet::operator[] (Xapian::termcount *i*) const

This returns the term at position *i* in this E-Set.

7.18.3.11 std::string Xapian::ESet::get_description () const

Return a string describing this object.

The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.19 Xapian::ESetIterator Class Reference

Iterate through terms in the [ESet](#).

Public Types

- typedef std::bidirectional_iterator_tag [iterator_category](#)
Allow use as an STL iterator.
- typedef std::string [value_type](#)
Allow use as an STL iterator.
- typedef [Xapian::termcount_diff](#) [difference_type](#)
Allow use as an STL iterator.
- typedef std::string * [pointer](#)
Allow use as an STL iterator.
- typedef std::string & [reference](#)
Allow use as an STL iterator.

Public Member Functions

- [ESetIterator](#) ()
Create an uninitialised iterator; this cannot be used, but is convenient syntactically.
- [ESetIterator](#) (const [ESetIterator](#) &other)
Copying is allowed (and is cheap).
- void [operator=](#) (const [ESetIterator](#) &other)
Assignment is allowed (and is cheap).
- [ESetIterator](#) & [operator++](#) ()
Advance the iterator.
- [ESetIterator](#) [operator++](#) (int)
Advance the iterator (postfix variant).
- [ESetIterator](#) & [operator--](#) ()
Decrement the iterator.
- [ESetIterator](#) [operator--](#) (int)
Decrement the iterator (postfix variant).
- const std::string & [operator*](#) () const

Get the term for the current position.

- `Xapian::weight get_weight () const`
Get the weight of the term at the current position.
- `std::string get_description () const`
Return a string describing this object.

Friends

- `bool operator== (const ESetIterator &a, const ESetIterator &b)`
Equality test for `ESetIterator` objects.
- `bool operator!= (const ESetIterator &a, const ESetIterator &b)`
Inequality test for `ESetIterator` objects.

7.19.1 Detailed Description

Iterate through terms in the `ESet`.

7.19.2 Member Typedef Documentation

7.19.2.1 `typedef std::bidirectional_iterator_tag Xapian::ESetIterator::iterator_category`

Allow use as an STL iterator.

7.19.2.2 `typedef std::string Xapian::ESetIterator::value_type`

Allow use as an STL iterator.

7.19.2.3 `typedef Xapian::termcount_diff Xapian::ESetIterator::difference_type`

Allow use as an STL iterator.

7.19.2.4 `typedef std::string* Xapian::ESetIterator::pointer`

Allow use as an STL iterator.

7.19.2.5 `typedef std::string& Xapian::ESetIterator::reference`

Allow use as an STL iterator.

7.19.3 Constructor & Destructor Documentation

7.19.3.1 Xapian::ESetIterator::ESetIterator () [inline]

Create an uninitialised iterator; this cannot be used, but is convenient syntactically.

7.19.3.2 Xapian::ESetIterator::ESetIterator (const ESetIterator & *other*) [inline]

Copying is allowed (and is cheap).

7.19.4 Member Function Documentation

7.19.4.1 void Xapian::ESetIterator::operator= (const ESetIterator & *other*) [inline]

Assignment is allowed (and is cheap).

7.19.4.2 ESetIterator& Xapian::ESetIterator::operator++ () [inline]

Advance the iterator.

7.19.4.3 ESetIterator Xapian::ESetIterator::operator++ (int) [inline]

Advance the iterator (postfix variant).

7.19.4.4 ESetIterator& Xapian::ESetIterator::operator-- () [inline]

Decrement the iterator.

7.19.4.5 ESetIterator Xapian::ESetIterator::operator-- (int) [inline]

Decrement the iterator (postfix variant).

7.19.4.6 const std::string& Xapian::ESetIterator::operator * () const

Get the term for the current position.

7.19.4.7 Xapian::weight Xapian::ESetIterator::get_weight () const

Get the weight of the term at the current position.

7.19.4.8 `std::string Xapian::ESetIterator::get_description () const`

Return a string describing this object.

7.19.5 Friends And Related Function Documentation**7.19.5.1** `bool operator== (const ESetIterator & a, const ESetIterator & b)`
[friend]

Equality test for [ESetIterator](#) objects.

7.19.5.2 `bool operator!= (const ESetIterator & a, const ESetIterator & b)`
[friend]

Inequality test for [ESetIterator](#) objects.


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.20 Xapian::ExpandDecider Class Reference

Virtual base class for expand decider functor.

Inheritance diagram for Xapian::ExpandDecider:



Public Member Functions

- virtual bool [operator\(\)](#) (const std::string &term) const =0
Do we want this term in the [ESet](#)?
- virtual [~ExpandDecider](#) ()
Virtual destructor, because we have virtual methods.

7.20.1 Detailed Description

Virtual base class for expand decider functor.

7.20.2 Constructor & Destructor Documentation

7.20.2.1 virtual Xapian::ExpandDecider::~~ExpandDecider () [\[virtual\]](#)

Virtual destructor, because we have virtual methods.

7.20.3 Member Function Documentation

7.20.3.1 virtual bool Xapian::ExpandDecider::operator() (const std::string &term) const [\[pure virtual\]](#)

Do we want this term in the [ESet](#)?

Implemented in [Xapian::ExpandDeciderAnd](#), and [Xapian::ExpandDeciderFilterTerms](#).


The documentation for this class was generated from the following file:

- [xapian/expanddecider.h](#)

7.21 Xapian::ExpandDeciderAnd Class Reference

[ExpandDecider](#) subclass which rejects terms using two [ExpandDeciders](#).

Inheritance diagram for Xapian::ExpandDeciderAnd:



Public Member Functions

- [ExpandDeciderAnd](#) (const [ExpandDecider](#) &first_, const [ExpandDecider](#) &second_)

Terms will be checked with first, and if accepted, then checked with second.

- [ExpandDeciderAnd](#) (const [ExpandDecider](#) *first_, const [ExpandDecider](#) *second_)

Compatibility method.

- virtual bool [operator\(\)](#) (const std::string &term) const

Do we want this term in the [ESet](#)?

7.21.1 Detailed Description

[ExpandDecider](#) subclass which rejects terms using two [ExpandDeciders](#).

Terms are only accepted if they are accepted by both of the specified [ExpandDecider](#) objects.

7.21.2 Constructor & Destructor Documentation

7.21.2.1 Xapian::ExpandDeciderAnd::ExpandDeciderAnd (const [ExpandDecider](#) &first_, const [ExpandDecider](#) &second_) [inline]

Terms will be checked with *first*, and if accepted, then checked with *second*.

7.21.2.2 Xapian::ExpandDeciderAnd::ExpandDeciderAnd (const [ExpandDecider](#) *first_, const [ExpandDecider](#) *second_) [inline]

Compatibility method.

7.21.3 Member Function Documentation

7.21.3.1 `virtual bool Xapian::ExpandDeciderAnd::operator() (const std::string & term) const` [virtual]

Do we want this term in the [ESet](#)?

Implements [Xapian::ExpandDecider](#).


The documentation for this class was generated from the following file:

- [xapian/expanddecider.h](#)

7.22 Xapian::ExpandDeciderFilterTerms Class Reference

[ExpandDecider](#) subclass which rejects terms in a specified list.

Inheritance diagram for Xapian::ExpandDeciderFilterTerms:



Public Member Functions

- `template<class Iterator>`
[ExpandDeciderFilterTerms](#) (Iterator reject_begin, Iterator reject_end)
The two iterators specify a list of terms to be rejected.
- `virtual bool operator() (const std::string &term) const`
Do we want this term in the [ESet](#)?

7.22.1 Detailed Description

[ExpandDecider](#) subclass which rejects terms in a specified list.

[ExpandDeciderFilterTerms](#) provides an easy way to filter out terms from a fixed list when generating an [ESet](#).

7.22.2 Constructor & Destructor Documentation

- 7.22.2.1** `template<class Iterator>`
Xapian::ExpandDeciderFilterTerms::ExpandDeciderFilterTerms
 (Iterator *reject_begin*, Iterator *reject_end*) `[inline]`

The two iterators specify a list of terms to be rejected.

reject_begin and *reject_end* can be any input_iterator type which returns std::string or char * (e.g. [TermIterator](#) or char **).

7.22.3 Member Function Documentation

- 7.22.3.1** `virtual bool Xapian::ExpandDeciderFilterTerms::operator() (const std::string & term) const` `[virtual]`

Do we want this term in the [ESet](#)?

Implements [Xapian::ExpandDecider](#).


The documentation for this class was generated from the following file:

- [xapian/expanddecider.h](#)

7.23 Xapian::FeatureUnavailableError Class Reference

Indicates an attempt to use a feature which is unavailable.

Inheritance diagram for Xapian::FeatureUnavailableError:



Public Member Functions

- [FeatureUnavailableError](#) (const std::string &msg_, const std::string &context_ = "", int errno_ = 0)
General purpose constructor which allows setting errno.
- [FeatureUnavailableError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.23.1 Detailed Description

Indicates an attempt to use a feature which is unavailable.

Typically a feature is unavailable because it wasn't compiled in, or because it requires other software or facilities which aren't available.

7.23.2 Constructor & Destructor Documentation

7.23.2.1 Xapian::FeatureUnavailableError::FeatureUnavailableError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.23.2.2 Xapian::FeatureUnavailableError::FeatureUnavailableError (const std::string & msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.24 Xapian::InternalError Class Reference

[InternalError](#) indicates a runtime problem of some sort.

Inheritance diagram for Xapian::InternalError:



Public Member Functions

- [InternalError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [InternalError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.24.1 Detailed Description

[InternalError](#) indicates a runtime problem of some sort.

7.24.2 Constructor & Destructor Documentation

7.24.2.1 Xapian::InternalError::InternalError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.24.2.2 Xapian::InternalError::InternalError (const std::string &msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- xapian/[error.h](#)

7.25 Xapian::InvalidArgumentError Class Reference

[InvalidArgumentError](#) indicates an invalid parameter value was passed to the API.

Inheritance diagram for Xapian::InvalidArgumentError:



Public Member Functions

- [InvalidArgumentError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [InvalidArgumentError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.25.1 Detailed Description

[InvalidArgumentError](#) indicates an invalid parameter value was passed to the API.

7.25.2 Constructor & Destructor Documentation

- 7.25.2.1 Xapian::InvalidArgumentError::InvalidArgumentError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]**

General purpose constructor which allows setting errno.

- 7.25.2.2 Xapian::InvalidArgumentError::InvalidArgumentError (const std::string & msg_, int errno_) [inline]**

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.26 Xapian::InvalidOperationError Class Reference

[InvalidOperationError](#) indicates the API was used in an invalid way.

Inheritance diagram for Xapian::InvalidOperationError:



Public Member Functions

- [InvalidOperationError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [InvalidOperationError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.26.1 Detailed Description

[InvalidOperationError](#) indicates the API was used in an invalid way.

7.26.2 Constructor & Destructor Documentation

- 7.26.2.1 Xapian::InvalidOperationError::InvalidOperationError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]**

General purpose constructor which allows setting errno.

- 7.26.2.2 Xapian::InvalidOperationError::InvalidOperationError (const std::string & msg_, int errno_) [inline]**

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.27 Xapian::LogicError Class Reference

The base class for exceptions indicating errors in the program logic.

Inheritance diagram for Xapian::LogicError:

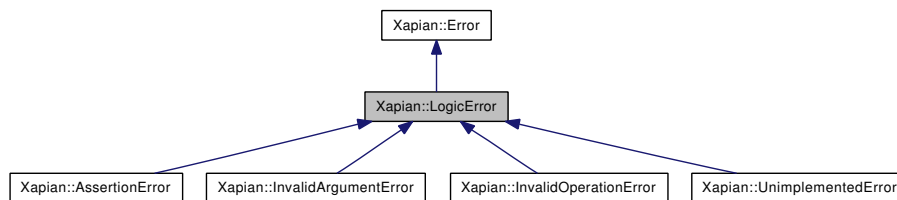

7.27.1 Detailed Description

The base class for exceptions indicating errors in the program logic.

A subclass of [LogicError](#) will be thrown if [Xapian](#) detects a violation of a class invariant or a logical precondition or postcondition, etc.

The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.28 Xapian::MatchDecider Class Reference

Base class for matcher decision functor.

Public Member Functions

- virtual bool [operator\(\)](#) (const [Xapian::Document](#) &doc) const=0
Decide whether we want this document to be in the [MSet](#).
- virtual [~MatchDecider](#) ()
Destructor.

7.28.1 Detailed Description

Base class for matcher decision functor.

7.28.2 Constructor & Destructor Documentation

7.28.2.1 virtual Xapian::MatchDecider::~~MatchDecider () [virtual]

Destructor.

7.28.3 Member Function Documentation

7.28.3.1 virtual bool Xapian::MatchDecider::operator() (const Xapian::Document & doc) const [pure virtual]

Decide whether we want this document to be in the [MSet](#).

Return true if the document is acceptable, or false if the document should be excluded from the [MSet](#).

The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.29 Xapian::MSet Class Reference

A match set ([MSet](#)).

Public Types

- typedef [MSetIterator](#) [value_type](#)
Allow use as an STL container.
- typedef [MSetIterator](#) [iterator](#)
Allow use as an STL container.
- typedef [MSetIterator](#) [const_iterator](#)
Allow use as an STL container.
- typedef [MSetIterator](#) & [reference](#)
Allow use as an STL container.
- typedef [MSetIterator](#) & [const_reference](#)
Allow use as an STL container.
- typedef [MSetIterator](#) * [pointer](#)
Allow use as an STL container.
- typedef [Xapian::doccount_diff](#) [difference_type](#)
Allow use as an STL container.
- typedef [Xapian::doccount](#) [size_type](#)
Allow use as an STL container.

Public Member Functions

- **MSet** (MSet::Internal *internal_)
- [MSet](#) ()
Create an empty [Xapian::MSet](#).
- [~MSet](#) ()
Destroy a [Xapian::MSet](#).
- [MSet](#) (const [MSet](#) &other)
Copying is allowed (and is cheap).
- void [operator=](#) (const [MSet](#) &other)
Assignment is allowed (and is cheap).
- void [fetch](#) (const [MSetIterator](#) &begin, const [MSetIterator](#) &end) const

Fetch the document info for a set of items in the [MSet](#).

- void [fetch](#) (const [MSetIterator](#) &item) const
Fetch the single item specified.
- void [fetch](#) () const
Fetch all the items in the [MSet](#).
- [Xapian::percent convert_to_percent](#) ([Xapian::weight](#) wt) const
This converts the weight supplied to a percentage score.
- [Xapian::percent convert_to_percent](#) (const [MSetIterator](#) &it) const
Return the percentage score for a particular item.
- [Xapian::doccount get_termfreq](#) (const std::string &name) const
Return the term frequency of the given query term.
- [Xapian::weight get_termweight](#) (const std::string &name) const
Return the term weight of the given query term.
- [Xapian::doccount get_firstitem](#) () const
The index of the first item in the result which was put into the [MSet](#).
- [Xapian::doccount get_matches_lower_bound](#) () const
A lower bound on the number of documents in the database which match the query.
- [Xapian::doccount get_matches_estimated](#) () const
An estimate for the number of documents in the database which match the query.
- [Xapian::doccount get_matches_upper_bound](#) () const
An upper bound on the number of documents in the database which match the query.
- [Xapian::weight get_max_possible](#) () const
The maximum possible weight in the [MSet](#).
- [Xapian::weight get_max_attained](#) () const
The greatest weight which is attained by any document in the database.
- [Xapian::doccount size](#) () const
The number of items in this [MSet](#).
- [Xapian::doccount max_size](#) () const
Required to allow use as an STL container.
- bool [empty](#) () const
Test if this [MSet](#) is empty.

- void [swap](#) ([MSet](#) &other)
Swap the [MSet](#) we point to with another.
- [MSetIterator begin](#) () const
Iterator for the terms in this [MSet](#).
- [MSetIterator end](#) () const
End iterator corresponding to [begin](#)().
- [MSetIterator back](#) () const
Iterator pointing to the last element of this [MSet](#).
- [MSetIterator operator\[\]](#) ([Xapian::doccount](#) i) const
This returns the document at position i in this [MSet](#) object.
- std::string [get_description](#) () const
Return a string describing this object.

Public Attributes

- [Xapian::Internal::RefCntPtr](#)< [Internal](#) > **internal**

7.29.1 Detailed Description

A match set ([MSet](#)).

This class represents (a portion of) the results of a query.

7.29.2 Member Typedef Documentation

7.29.2.1 `typedef MSetIterator Xapian::MSet::value_type`

Allow use as an STL container.

7.29.2.2 `typedef MSetIterator Xapian::MSet::iterator`

Allow use as an STL container.

7.29.2.3 `typedef MSetIterator Xapian::MSet::const_iterator`

Allow use as an STL container.

7.29.2.4 typedef MSetIterator& Xapian::MSet::reference

Allow use as an STL container.

7.29.2.5 typedef MSetIterator& Xapian::MSet::const_reference

Allow use as an STL container.

7.29.2.6 typedef MSetIterator* Xapian::MSet::pointer

Allow use as an STL container.

7.29.2.7 typedef Xapian::doccount_diff Xapian::MSet::difference_type

Allow use as an STL container.

7.29.2.8 typedef Xapian::doccount Xapian::MSet::size_type

Allow use as an STL container.

7.29.3 Constructor & Destructor Documentation**7.29.3.1 Xapian::MSet::MSet ()**

Create an empty [Xapian::MSet](#).

7.29.3.2 Xapian::MSet::~~MSet ()

Destroy a [Xapian::MSet](#).

7.29.3.3 Xapian::MSet::MSet (const MSet & *other*)

Copying is allowed (and is cheap).

7.29.4 Member Function Documentation**7.29.4.1 void Xapian::MSet::operator= (const MSet & *other*)**

Assignment is allowed (and is cheap).

7.29.4.2 void Xapian::MSet::fetch (const MSetIterator & *begin*, const MSetIterator & *end*) const

Fetch the document info for a set of items in the [MSet](#).

This method causes the documents in the range specified by the iterators to be fetched from the database, and cached in the [Xapian::MSet](#) object. This has little effect when performing a search across a local database, but will greatly speed up subsequent access to the document contents when the documents are stored in a remote database.

The iterators must be over this [Xapian::MSet](#) - undefined behaviour will result otherwise.

Parameters:

begin [MSetIterator](#) for first item to fetch.

end [MSetIterator](#) for item after last item to fetch.

7.29.4.3 void Xapian::MSet::fetch (const MSetIterator & *item*) const

Fetch the single item specified.

7.29.4.4 void Xapian::MSet::fetch () const

Fetch all the items in the [MSet](#).

7.29.4.5 Xapian::percent Xapian::MSet::convert_to_percent (Xapian::weight *wt*) const

This converts the weight supplied to a percentage score.

The return value will be in the range 0 to 100, and will be 0 if and only if the item did not match the query at all.

7.29.4.6 Xapian::percent Xapian::MSet::convert_to_percent (const MSetIterator & *it*) const

Return the percentage score for a particular item.

7.29.4.7 Xapian::doccount Xapian::MSet::get_termfreq (const std::string & *tname*) const

Return the term frequency of the given query term.

Parameters:

tname The term to look for.

Exceptions:

[*Xapian::InvalidArgumentError*](#) is thrown if the term was not in the query.

7.29.4.8 Xapian::weight Xapian::MSet::get_termweight (const std::string & tname) const

Return the term weight of the given query term.

Parameters:

tname The term to look for.

Exceptions:

[*Xapian::InvalidArgumentError*](#) is thrown if the term was not in the query.

7.29.4.9 Xapian::doccount Xapian::MSet::get_firstitem () const

The index of the first item in the result which was put into the [MSet](#).

This corresponds to the parameter "first" specified in [Xapian::Enquire::get_mset\(\)](#). A value of 0 corresponds to the highest result being the first item in the [MSet](#).

7.29.4.10 Xapian::doccount Xapian::MSet::get_matches_lower_bound () const

A lower bound on the number of documents in the database which match the query.

This figure takes into account collapsing of duplicates, and weighting cutoff values.

This number is usually considerably less than the actual number of documents which match the query.

7.29.4.11 Xapian::doccount Xapian::MSet::get_matches_estimated () const

An estimate for the number of documents in the database which match the query.

This figure takes into account collapsing of duplicates, and weighting cutoff values.

This value is returned because there is sometimes a request to display such information. However, our experience is that presenting this value to users causes them to worry about the large number of results, rather than how useful those at the top of the result set are, and is thus undesirable.

7.29.4.12 Xapian::doccount Xapian::MSet::get_matches_upper_bound () const

An upper bound on the number of documents in the database which match the query.

This figure takes into account collapsing of duplicates, and weighting cutoff values.

This number is usually considerably greater than the actual number of documents which match the query.

7.29.4.13 Xapian::weight Xapian::MSet::get_max_possible () const

The maximum possible weight in the [MSet](#).

This weight is likely not to be attained in the set of results, but represents an upper bound on the weight which a document could attain for the given query.

7.29.4.14 Xapian::weight Xapian::MSet::get_max_attained () const

The greatest weight which is attained by any document in the database.

If `firstitem == 0` and the primary ordering is by relevance, this is the weight of the first entry in the [MSet](#).

If no documents are found by the query, this will be 0.

Note that calculation of `max_attained` requires calculation of at least one result item - therefore, if no items were requested when the query was performed (by specifying `maxitems = 0` in [Xapian::Enquire::get_mset\(\)](#)), this value will be 0.

7.29.4.15 Xapian::doccount Xapian::MSet::size () const

The number of items in this [MSet](#).

7.29.4.16 Xapian::doccount Xapian::MSet::max_size () const [inline]

Required to allow use as an STL container.

7.29.4.17 bool Xapian::MSet::empty () const

Test if this [MSet](#) is empty.

7.29.4.18 void Xapian::MSet::swap (MSet & *other*)

Swap the [MSet](#) we point to with another.

7.29.4.19 MSetIterator Xapian::MSet::begin () const

Iterator for the terms in this [MSet](#).

7.29.4.20 MSetIterator Xapian::MSet::end () const

End iterator corresponding to [begin\(\)](#).

7.29.4.21 MSetIterator Xapian::MSet::back () const

Iterator pointing to the last element of this [MSet](#).

7.29.4.22 MSetIterator Xapian::MSet::operator[] (Xapian::doccount *i*) const

This returns the document at position *i* in this [MSet](#) object.

Note that this is not the same as the document at rank *i* in the query, unless the "first" parameter to [Xapian::Enquire::get_mset](#) was 0. Rather, it is the document at rank *i* + first.

In other words, the offset is into the documents represented by this object, not into the set of documents matching the query.

7.29.4.23 std::string Xapian::MSet::get_description () const

Return a string describing this object.

The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.30 Xapian::MSetIterator Class Reference

An iterator pointing to items in an [MSet](#).

Public Types

- typedef std::bidirectional_iterator_tag [iterator_category](#)
Allow use as an STL iterator.
- typedef [Xapian::docid](#) value_type
Allow use as an STL iterator.
- typedef [Xapian::doccount_diff](#) difference_type
Allow use as an STL iterator.
- typedef [Xapian::docid](#) * pointer
Allow use as an STL iterator.
- typedef [Xapian::docid](#) & reference
Allow use as an STL iterator.

Public Member Functions

- [MSetIterator](#) ()
Create an uninitialised iterator; this cannot be used, but is convenient syntactically.
- [MSetIterator](#) (const [MSetIterator](#) &other)
Copying is allowed (and is cheap).
- void operator= (const [MSetIterator](#) &other)
Assignment is allowed (and is cheap).
- [MSetIterator](#) & operator++ ()
Advance the iterator.
- [MSetIterator](#) operator++ (int)
Advance the iterator (postfix variant).
- [MSetIterator](#) & operator-- ()
Decrement the iterator.
- [MSetIterator](#) operator-- (int)
Decrement the iterator (postfix variant).
- [Xapian::docid](#) operator * () const

Get the document ID for the current position.

- [Xapian::Document](#) `get_document ()` const
Get a [Xapian::Document](#) object for the current position.
- [Xapian::doccount](#) `get_rank ()` const
Get the rank of the document at the current position.
- [Xapian::weight](#) `get_weight ()` const
Get the weight of the document at the current position.
- `std::string` `get_collapse_key ()` const
Get the collapse key for this document.
- [Xapian::doccount](#) `get_collapse_count ()` const
Get an estimate of the number of documents that have been collapsed into this one.
- [Xapian::percent](#) `get_percent ()` const
This returns the weight of the document as a percentage score.
- `std::string` `get_description ()` const
Return a string describing this object.

Friends

- `bool` `operator==` (const [MSetIterator](#) &a, const [MSetIterator](#) &b)
Equality test for [MSetIterator](#) objects.
- `bool` `operator!=` (const [MSetIterator](#) &a, const [MSetIterator](#) &b)
Inequality test for [MSetIterator](#) objects.

7.30.1 Detailed Description

An iterator pointing to items in an [MSet](#).

This is used for access to individual results of a match.

7.30.2 Member Typedef Documentation

7.30.2.1 `typedef std::bidirectional_iterator_tag` `Xapian::MSetIterator::iterator_category`

Allow use as an STL iterator.

7.30.2.2 `typedef Xapian::docid Xapian::MSetIterator::value_type`

Allow use as an STL iterator.

7.30.2.3 `typedef Xapian::doccount_diff Xapian::MSetIterator::difference_type`

Allow use as an STL iterator.

7.30.2.4 `typedef Xapian::docid* Xapian::MSetIterator::pointer`

Allow use as an STL iterator.

7.30.2.5 `typedef Xapian::docid& Xapian::MSetIterator::reference`

Allow use as an STL iterator.

7.30.3 Constructor & Destructor Documentation

7.30.3.1 `Xapian::MSetIterator::MSetIterator ()` `[inline]`

Create an uninitialised iterator; this cannot be used, but is convenient syntactically.

7.30.3.2 `Xapian::MSetIterator::MSetIterator (const MSetIterator & other)` `[inline]`

Copying is allowed (and is cheap).

7.30.4 Member Function Documentation

7.30.4.1 `void Xapian::MSetIterator::operator= (const MSetIterator & other)` `[inline]`

Assignment is allowed (and is cheap).

7.30.4.2 `MSetIterator& Xapian::MSetIterator::operator++ ()` `[inline]`

Advance the iterator.

7.30.4.3 `MSetIterator Xapian::MSetIterator::operator++ (int)` `[inline]`

Advance the iterator (postfix variant).

7.30.4.4 MSetIterator& Xapian::MSetIterator::operator-- () [inline]

Decrement the iterator.

7.30.4.5 MSetIterator Xapian::MSetIterator::operator-- (int) [inline]

Decrement the iterator (postfix variant).

7.30.4.6 Xapian::docid Xapian::MSetIterator::operator * () const

Get the document ID for the current position.

7.30.4.7 Xapian::Document Xapian::MSetIterator::get_document () const

Get a [Xapian::Document](#) object for the current position.

This method returns a [Xapian::Document](#) object which provides the information about the document pointed to by the [MSetIterator](#).

If the underlying database has suitable support, using this call (rather than asking the database for a document based on its document ID) will enable the system to ensure that the correct data is returned, and that the document has not been deleted or changed since the query was performed.

Returns:

A [Xapian::Document](#) object containing the document data.

Exceptions:

[Xapian::DocNotFoundError](#) The document specified could not be found in the database.

7.30.4.8 Xapian::doccount Xapian::MSetIterator::get_rank () const [inline]

Get the rank of the document at the current position.

The rank is the position that this document is at in the ordered list of results of the query. The result is 0-based - i.e. the top-ranked document has a rank of 0.

7.30.4.9 Xapian::weight Xapian::MSetIterator::get_weight () const

Get the weight of the document at the current position.

7.30.4.10 std::string Xapian::MSetIterator::get_collapse_key () const

Get the collapse key for this document.

7.30.4.11 Xapian::doccount Xapian::MSetIterator::get_collapse_count () const

Get an estimate of the number of documents that have been collapsed into this one.

The estimate will always be less than or equal to the actual number of other documents satisfying the match criteria with the same collapse key as this document.

This method may return 0 even though there are other documents with the same collapse key which satisfying the match criteria. However if this method returns non-zero, there definitely are other such documents. So this method may be used to inform the user that there are "at least N other matches in this group", or to control whether to offer a "show other documents in this group" feature (but note that it may not offer it in every case where it would show other documents).

7.30.4.12 Xapian::percent Xapian::MSetIterator::get_percent () const

This returns the weight of the document as a percentage score.

The return value will be an integer in the range 0 to 100: 0 meaning that the item did not match the query at all.

The intention is that the highest weighted document will get 100 if it matches all the weight-contributing terms in the query. However, currently it may get a lower percentage score if you use a [MatchDecider](#) and the sorting is primarily by value. In this case, the percentage for a particular document may vary depending on the first, max_size, and checkatleast parameters passed to [Enquire::get_mset\(\)](#) (this bug is hard to fix without having to apply the [MatchDecider](#) to potentially many more documents, which is potentially costly).

7.30.4.13 std::string Xapian::MSetIterator::get_description () const

Return a string describing this object.

7.30.5 Friends And Related Function Documentation

7.30.5.1 bool operator== (const MSetIterator & a, const MSetIterator & b) [friend]

Equality test for [MSetIterator](#) objects.

7.30.5.2 bool operator!= (const MSetIterator & a, const MSetIterator & b) [friend]

Inequality test for [MSetIterator](#) objects.


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.31 Xapian::MultiValueSorter Class Reference

[Sorter](#) subclass which sorts by a several values.

Inheritance diagram for Xapian::MultiValueSorter:



Public Member Functions

- `template<class Iterator>`
MultiValueSorter (Iterator begin, Iterator end)
- `virtual std::string operator() (const Xapian::Document &doc) const`
This method takes a [Document](#) object and builds a sort key from it.
- `void add (Xapian::valueno valno, bool forward=true)`

7.31.1 Detailed Description

[Sorter](#) subclass which sorts by a several values.

Results are ordered by the first value. In the event of a tie, the second is used. If this is the same for both, the third is used, and so on.

7.31.2 Member Function Documentation

7.31.2.1 `virtual std::string Xapian::MultiValueSorter::operator() (const Xapian::Document & doc) const` [virtual]

This method takes a [Document](#) object and builds a sort key from it.

Documents are then ordered by a string compare on the sort keys.

Implements [Xapian::Sorter](#).


The documentation for this class was generated from the following file:

- [xapian/sorter.h](#)

7.32 Xapian::NetworkError Class Reference

Indicates a problem communicating with a remote database.

Inheritance diagram for Xapian::NetworkError:



Public Member Functions

- [NetworkError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [NetworkError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.32.1 Detailed Description

Indicates a problem communicating with a remote database.

7.32.2 Constructor & Destructor Documentation

7.32.2.1 `Xapian::NetworkError::NetworkError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]`

General purpose constructor which allows setting errno.

7.32.2.2 `Xapian::NetworkError::NetworkError (const std::string & msg_, int errno_) [inline]`

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.33 Xapian::NetworkTimeoutError Class Reference

Indicates a timeout expired while communicating with a remote database.

Inheritance diagram for Xapian::NetworkTimeoutError:



Public Member Functions

- [NetworkTimeoutError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [NetworkTimeoutError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.33.1 Detailed Description

Indicates a timeout expired while communicating with a remote database.

7.33.2 Constructor & Destructor Documentation

- 7.33.2.1 Xapian::NetworkTimeoutError::NetworkTimeoutError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]**

General purpose constructor which allows setting errno.

- 7.33.2.2 Xapian::NetworkTimeoutError::NetworkTimeoutError (const std::string &msg_, int errno_) [inline]**

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.34 Xapian::NumberValueRangeProcessor Class Reference

Handle a number range.

Inheritance diagram for Xapian::NumberValueRangeProcessor:



Public Member Functions

- [NumberValueRangeProcessor](#) ([Xapian::valueno](#) valno_)
Constructor.
- [NumberValueRangeProcessor](#) ([Xapian::valueno](#) valno_, const std::string &str_, bool prefix_=true)
Constructor.
- [Xapian::valueno operator\(\)](#) (std::string &begin, std::string &end)
Check for a valid range of this type.

7.34.1 Detailed Description

Handle a number range.

This class must be used on values which have been encoded using [Xapian::sortable_serialise\(\)](#) which turns numbers into strings which will sort in the same order as the numbers (the same values can be used to implement a numeric sort).

7.34.2 Constructor & Destructor Documentation

7.34.2.1 Xapian::NumberValueRangeProcessor::NumberValueRangeProcessor (Xapian::valueno valno_) [inline]

Constructor.

Parameters:

valno_ The value number to return from operator().

7.34.2.2 Xapian::NumberValueRangeProcessor::NumberValueRangeProcessor (Xapian::valueno *valno_*, const std::string & *str_*, bool *prefix_* = true) [inline]

Constructor.

Parameters:

valno_ The value number to return from operator().

str_ A string to look for to recognise values as belonging to this numeric range.

prefix_ Whether to look for the string at the start or end of the values. If true, the string is a prefix; if false, the string is a suffix (default: true).

The string supplied in *str_* is used by *operator()* to decide whether the pair of strings supplied to it constitute a valid range. If *prefix_* is true, the first value in a range must begin with *str_* (and the second value may optionally begin with *str_*); if *prefix_* is false, the second value in a range must end with *str_* (and the first value may optionally end with *str_*).

If *str_* is empty, the setting of *prefix_* is irrelevant, and no special strings are required at the start or end of the strings defining the range.

The remainder of both strings defining the endpoints must be valid floating point numbers. (FIXME: define format recognised).

For example, if *str_* is "\$" and *prefix_* is true, and the range processor has been added to the queryparser, the queryparser will accept "\$10..50" or "\$10..\$50", but not "10..50" or "10..\$50" as valid ranges. If *str_* is "kg" and *prefix_* is false, the queryparser will accept "10..50kg" or "10kg..50kg", but not "10..50" or "10kg..50" as valid ranges.

7.34.3 Member Function Documentation

7.34.3.1 Xapian::valueno Xapian::NumberValueRangeProcessor::operator() (std::string & *begin*, std::string & *end*) [virtual]

Check for a valid range of this type.

If BEGIN..END is a valid numeric value range, and has the appropriate prefix or suffix (if specified) required for this [NumberValueRangeProcessor](#), this method returns the value number of range filter on, and sets begin and end to the appropriate serialised values needed to delimit the range. Otherwise it returns [Xapian::BAD_VALUENO](#).

Implements [Xapian::ValueRangeProcessor](#).

The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.35 Xapian::PositionIterator Class Reference

An iterator pointing to items in a list of positions.

Public Types

- typedef std::input_iterator_tag **iterator_category**
- typedef Xapian::termpos **value_type**
- typedef Xapian::termpos_diff **difference_type**
- typedef Xapian::termpos * **pointer**
- typedef Xapian::termpos & **reference**

Public Member Functions

- **PositionIterator** (Internal *internal_)
- **PositionIterator** ()
Default constructor - for declaring an uninitialised iterator.
- **~PositionIterator** ()
Destructor.
- **PositionIterator** (const **PositionIterator** &o)
Copying is allowed.
- void **operator=** (const **PositionIterator** &o)
Assignment is allowed.
- Xapian::termpos **operator** * () const
- **PositionIterator** & **operator++** ()
- TermPosWrapper **operator++** (int)
- void **skip_to** (Xapian::termpos pos)
- std::string **get_description** () const
Return a string describing this object.

Friends

- bool **operator==** (const **PositionIterator** &a, const **PositionIterator** &b)
Test equality of two PositionIterators.

7.35.1 Detailed Description

An iterator pointing to items in a list of positions.

7.35.2 Constructor & Destructor Documentation

7.35.2.1 Xapian::PositionIterator::PositionIterator ()

Default constructor - for declaring an uninitialised iterator.

7.35.2.2 Xapian::PositionIterator::~~PositionIterator ()

Destructor.

7.35.2.3 Xapian::PositionIterator::PositionIterator (const PositionIterator & o)

Copying is allowed.

The internals are reference counted, so copying is also cheap.

7.35.3 Member Function Documentation

7.35.3.1 void Xapian::PositionIterator::operator= (const PositionIterator & o)

Assignment is allowed.

The internals are reference counted, so assignment is also cheap.

7.35.3.2 std::string Xapian::PositionIterator::get_description () const

Return a string describing this object.

7.35.4 Friends And Related Function Documentation

7.35.4.1 bool operator== (const PositionIterator & a, const PositionIterator & b) [friend]

Test equality of two PositionIterators.

The documentation for this class was generated from the following file:

- xapian/[positioniterator.h](#)

7.36 Xapian::PostingIterator Class Reference

An iterator pointing to items in a list of postings.

Public Types

- typedef std::input_iterator_tag [iterator_category](#)
Allow use as an STL iterator.
- typedef [Xapian::docid](#) [value_type](#)
Allow use as an STL iterator.
- typedef [Xapian::doccount_diff](#) [difference_type](#)
Allow use as an STL iterator.
- typedef [Xapian::docid](#) * [pointer](#)
Allow use as an STL iterator.
- typedef [Xapian::docid](#) & [reference](#)
Allow use as an STL iterator.

Public Member Functions

- [PostingIterator](#) ()
Default constructor - for declaring an uninitialised iterator.
- [~PostingIterator](#) ()
Destructor.
- [PostingIterator](#) (const [PostingIterator](#) &other)
Copying is allowed.
- void [operator=](#) (const [PostingIterator](#) &other)
Assignment is allowed.
- [PostingIterator](#) & [operator++](#) ()
- DocIDWrapper [operator++](#) (int)
- void [skip_to](#) ([Xapian::docid](#) did)
Skip the iterator to document did, or the first document after did if did isn't in the list of documents being iterated.
- [Xapian::docid](#) [operator *](#) () const
Get the document id at the current position in the postlist.
- [Xapian::doclength](#) [get_doclength](#) () const
Get the length of the document at the current position in the postlist.

- [Xapian::termcount get_wdf \(\)](#) const
Get the within document frequency of the document at the current position in the postlist.
- [PositionIterator positionlist_begin \(\)](#) const
Return [PositionIterator](#) pointing to start of positionlist for current document.
- [PositionIterator positionlist_end \(\)](#) const
Return [PositionIterator](#) pointing to end of positionlist for current document.
- [std::string get_description \(\)](#) const
Return a string describing this object.

Friends

- [bool operator== \(const \[PostingIterator\]\(#\) &a, const \[PostingIterator\]\(#\) &b\)](#)
Test equality of two PostingIterators.

7.36.1 Detailed Description

An iterator pointing to items in a list of postings.

7.36.2 Member Typedef Documentation

7.36.2.1 `typedef std::input_iterator_tag Xapian::PostingIterator::iterator_category`

Allow use as an STL iterator.

7.36.2.2 `typedef Xapian::docid Xapian::PostingIterator::value_type`

Allow use as an STL iterator.

7.36.2.3 `typedef Xapian::doccount_diff Xapian::PostingIterator::difference_type`

Allow use as an STL iterator.

7.36.2.4 `typedef Xapian::docid* Xapian::PostingIterator::pointer`

Allow use as an STL iterator.

7.36.2.5 typedef Xapian::docid& Xapian::PostingIterator::reference

Allow use as an STL iterator.

7.36.3 Constructor & Destructor Documentation

7.36.3.1 Xapian::PostingIterator::PostingIterator ()

Default constructor - for declaring an uninitialised iterator.

7.36.3.2 Xapian::PostingIterator::~~PostingIterator ()

Destructor.

7.36.3.3 Xapian::PostingIterator::PostingIterator (const PostingIterator & *other*)

Copying is allowed.

The internals are reference counted, so copying is also cheap.

7.36.4 Member Function Documentation

7.36.4.1 void Xapian::PostingIterator::operator= (const PostingIterator & *other*)

Assignment is allowed.

The internals are reference counted, so assignment is also cheap.

7.36.4.2 void Xapian::PostingIterator::skip_to (Xapian::docid *did*)

Skip the iterator to document *did*, or the first document after *did* if *did* isn't in the list of documents being iterated.

7.36.4.3 Xapian::docid Xapian::PostingIterator::operator * () const

Get the document id at the current position in the postlist.

7.36.4.4 Xapian::doclength Xapian::PostingIterator::get_doclength () const

Get the length of the document at the current position in the postlist.

This information may be stored in the postlist, in which case this lookup should be extremely fast (indeed, not require further disk access). If the information is not present in the postlist, it will be retrieved from the database, at a greater performance cost.

7.36.4.5 Xapian::termcount Xapian::PostingIterator::get_wdf () const

Get the within document frequency of the document at the current position in the postlist.

7.36.4.6 PositionIterator Xapian::PostingIterator::positionlist_begin () const

Return [PositionIterator](#) pointing to start of positionlist for current document.

7.36.4.7 PositionIterator Xapian::PostingIterator::positionlist_end () const
[inline]

Return [PositionIterator](#) pointing to end of positionlist for current document.

7.36.4.8 std::string Xapian::PostingIterator::get_description () const

Return a string describing this object.

7.36.5 Friends And Related Function Documentation**7.36.5.1 bool operator== (const PostingIterator & *a*, const PostingIterator & *b*)**
[friend]

Test equality of two PostingIterators.

The documentation for this class was generated from the following file:

- [xapian/postingiterator.h](#)

7.37 Xapian::Query Class Reference

Class representing a query.

Public Types

- enum `op` {
`OP_AND`, `OP_OR`, `OP_AND_NOT`, `OP_XOR`,
`OP_AND_MAYBE`, `OP_FILTER`, `OP_NEAR`, `OP_PHRASE`,
`OP_VALUE_RANGE`, `OP_SCALE_WEIGHT`, `OP_ELITE_SET`, `OP_VALUE_GE`,
`OP_VALUE_LE` }

Enum of possible query operations.

Public Member Functions

- `Query` (const `Query` ©yme)
Copy constructor.
- `Query` & `operator=` (const `Query` ©yme)
Assignment.
- `Query` ()
Default constructor: makes an empty query which matches no documents.
- `~Query` ()
Destructor.
- `Query` (const std::string &tname_, `Xapian::termcount` wqf_=1, `Xapian::termpos` pos_=0)
A query consisting of a single term.
- `Query` (`Query::op` op_, const `Query` &left, const `Query` &right)
A query consisting of two subqueries, opp-ed together.
- `Query` (`Query::op` op_, const std::string &left, const std::string &right)
A query consisting of two termnames opp-ed together.
- template<class Iterator>
`Query` (`Query::op` op_, Iterator qbegin, Iterator qend, `Xapian::termcount` parameter=0)
Combine a number of Xapian::Query-s with the specified operator.
- `Query` (`Query::op` op_, `Xapian::Query` q)

Apply the specified operator to a single *Xapian::Query* object.

- *Query* (*Query::op* op_, *Xapian::Query* q, double parameter)
 Apply the specified operator to a single *Xapian::Query* object, with a double parameter.
- *Query* (*Query::op* op_, *Xapian::valueno* valno, const std::string &begin, const std::string &end)
 Construct a value range query on a document value.
- *Query* (*Query::op* op_, *Xapian::valueno* valno, const std::string &value)
 Construct a value comparison query on a document value.
- *Xapian::termcount* get_length () const
 Get the length of the query, used by some ranking formulae.
- *TermIterator* get_terms_begin () const
 Return a *Xapian::TermIterator* returning all the terms in the query, in order of termpos.
- *TermIterator* get_terms_end () const
 Return a *Xapian::TermIterator* to the end of the list of terms in the query.
- bool empty () const
 Test if the query is empty (i.e.
- std::string get_description () const
 Return a string describing this object.

Static Public Attributes

- static *Xapian::Query* MatchAll
 A query which matches all documents in the database.
- static *Xapian::Query* MatchNothing
 A query which matches no documents.

7.37.1 Detailed Description

Class representing a query.

Queries are represented as a tree of objects.

7.37.2 Member Enumeration Documentation

7.37.2.1 enum Xapian::Query::op

Enum of possible query operations.

Enumerator:

OP_AND Return iff both subqueries are satisfied.

OP_OR Return if either subquery is satisfied.

OP_AND_NOT Return if left but not right satisfied.

OP_XOR Return if one query satisfied, but not both.

OP_AND_MAYBE Return iff left satisfied, but use weights from both.

OP_FILTER As AND, but use only weights from left subquery.

OP_NEAR Find occurrences of a list of terms with all the terms occurring within a specified window of positions.

Each occurrence of a term must be at a different position, but the order they appear in is irrelevant.

The window parameter should be specified for this operation, but will default to the number of terms in the list.

OP_PHRASE Find occurrences of a list of terms with all the terms occurring within a specified window of positions, and all the terms appearing in the order specified.

Each occurrence of a term must be at a different position.

The window parameter should be specified for this operation, but will default to the number of terms in the list.

OP_VALUE_RANGE Filter by a range test on a document value.

OP_SCALE_WEIGHT Scale the weight of a subquery by the specified factor.

A factor of 0 means this subquery will contribute no weight to the query - it will act as a purely boolean subquery.

If the factor is negative, [Xapian::InvalidArgumentError](#) will be thrown.

OP_ELITE_SET Select an elite set from the subqueries, and perform a query with these combined as an OR query.

OP_VALUE_GE Filter by a greater-than-or-equal test on a document value.

OP_VALUE_LE Filter by a less-than-or-equal test on a document value.

7.37.3 Constructor & Destructor Documentation

7.37.3.1 Xapian::Query::Query (const Query & copyme)

Copy constructor.

7.37.3.2 Xapian::Query::Query ()

Default constructor: makes an empty query which matches no documents.

Also useful for defining a [Query](#) object to be assigned to later.

An exception will be thrown if an attempt is made to use an undefined query when building up a composite query.

7.37.3.3 Xapian::Query::~~Query ()

Destructor.

7.37.3.4 Xapian::Query::Query (const std::string & *tname_*, Xapian::termcount *wqf_* = 1, Xapian::termpos *pos_* = 0)

A query consisting of a single term.

7.37.3.5 Xapian::Query::Query (Query::op *op_*, const Query & *left*, const Query & *right*)

A query consisting of two subqueries, opp-ed together.

7.37.3.6 Xapian::Query::Query (Query::op *op_*, const std::string & *left*, const std::string & *right*)

A query consisting of two termnames opp-ed together.

7.37.3.7 template<class Iterator> Xapian::Query::Query (Query::op *op_*, Iterator *qbegin*, Iterator *qend*, Xapian::termcount *parameter* = 0) [inline]

Combine a number of [Xapian::Query](#)-s with the specified operator.

The [Xapian::Query](#) objects are specified with begin and end iterators.

AND, OR, NEAR and PHRASE can take any number of subqueries. Other operators take exactly two subqueries.

The iterators may be to [Xapian::Query](#) objects, pointers to [Xapian::Query](#) objects, or termnames (std::string-s).

For NEAR and PHRASE, a window size can be specified in parameter.

For ELITE_SET, the elite set size can be specified in parameter.

7.37.3.8 Xapian::Query::Query (Query::op *op_*, Xapian::Query *q*)

Apply the specified operator to a single [Xapian::Query](#) object.

Deprecated

This method is deprecated because it isn't useful, since none of the current query operators can be usefully applied to a single subquery without a parameter value.

7.37.3.9 Xapian::Query::Query (Query::op *op_*, Xapian::Query *q*, double *parameter*)

Apply the specified operator to a single [Xapian::Query](#) object, with a double parameter.

7.37.3.10 Xapian::Query::Query (Query::op *op_*, Xapian::valueno *valno*, const std::string & *begin*, const std::string & *end*)

Construct a value range query on a document value.

A value range query matches those documents which have a value stored in the slot given by *valno* which is in the range specified by *begin* and *end* (in lexicographical order), including the endpoints.

Parameters:

op_ The operator to use for the query. Currently, must be OP_VALUE_RANGE.

valno The slot number to get the value from.

begin The start of the range.

end The end of the range.

7.37.3.11 Xapian::Query::Query (Query::op *op_*, Xapian::valueno *valno*, const std::string & *value*)

Construct a value comparison query on a document value.

This query matches those documents which have a value stored in the slot given by *valno* which compares, as specified by the operator, to *value*.

Parameters:

op_ The operator to use for the query. Currently, must be OP_VALUE_GE or OP_VALUE_LE.

valno The slot number to get the value from.

value The value to compare.

7.37.4 Member Function Documentation

7.37.4.1 Query& Xapian::Query::operator= (const Query & *copyme*)

Assignment.

7.37.4.2 Xapian::termcount Xapian::Query::get_length () const

Get the length of the query, used by some ranking formulae.

This value is calculated automatically - if you want to override it you can pass a different value to [Enquire::set_query\(\)](#).

7.37.4.3 TermIterator Xapian::Query::get_terms_begin () const

Return a [Xapian::TermIterator](#) returning all the terms in the query, in order of termpos.

If multiple terms have the same term position, their order is unspecified. Duplicates (same term and termpos) will be removed.

7.37.4.4 TermIterator Xapian::Query::get_terms_end () const [inline]

Return a [Xapian::TermIterator](#) to the end of the list of terms in the query.

7.37.4.5 bool Xapian::Query::empty () const

Test if the query is empty (i.e.

was constructed using the default ctor or with an empty iterator ctor).

7.37.4.6 std::string Xapian::Query::get_description () const

Return a string describing this object.

7.37.5 Member Data Documentation**7.37.5.1 Xapian::Query Xapian::Query::MatchAll [static]**

A query which matches all documents in the database.

7.37.5.2 Xapian::Query Xapian::Query::MatchNothing [static]

A query which matches no documents.

The documentation for this class was generated from the following file:

- [xapian/query.h](#)

7.38 Xapian::QueryParser Class Reference

Build a [Xapian::Query](#) object from a user query string.

Public Types

- enum [feature_flag](#) {
 [FLAG_BOOLEAN](#) = 1, [FLAG_PHRASE](#) = 2, [FLAG_LOVEHATE](#) = 4,
 [FLAG_BOOLEAN_ANY_CASE](#) = 8,
 [FLAG_WILDCARD](#) = 16, [FLAG_PURE_NOT](#) = 32, [FLAG_PARTIAL](#) = 64,
 [FLAG_SPELLING_CORRECTION](#) = 128,
 [FLAG_SYNONYM](#) = 256, [FLAG_AUTO_SYNONYMS](#) = 512, [FLAG_-](#)
 [AUTO_MULTIWORD_SYNONYMS](#) = 1024 | [FLAG_AUTO_SYNONYMS](#),
 [FLAG_DEFAULT](#) = [FLAG_PHRASE](#)|[FLAG_BOOLEAN](#)|[FLAG_LOVEHATE](#)
}
- Enum of feature flags.*
- enum [stem_strategy](#) { [STEM_NONE](#), [STEM_SOME](#), [STEM_ALL](#) }

Public Member Functions

- [QueryParser](#) (const [QueryParser](#) &o)
Copy constructor.
- [QueryParser](#) & [operator=](#) (const [QueryParser](#) &o)
Assignment.
- [QueryParser](#) ()
Default constructor.
- [~QueryParser](#) ()
Destructor.
- void [set_stemmer](#) (const [Xapian::Stem](#) &stemmer)
Set the stemmer.
- void [set_stemming_strategy](#) ([stem_strategy](#) strategy)
Set the stemming strategy.
- void [set_stopper](#) (const [Stopper](#) *stop=NULL)
Set the stopper.
- void [set_default_op](#) ([Query::op](#) default_op)
Set the default operator.

- [Query::op get_default_op](#) () const
Get the current default operator.
- void [set_database](#) (const [Database](#) &db)
Specify the database being searched.
- [Query parse_query](#) (const std::string &query_string, unsigned flags=FLAG_PHRASE|FLAG_BOOLEAN|FLAG_LOVEHATE, const std::string &default_prefix="")
Parse a query.
- void [add_prefix](#) (const std::string &field, const std::string &prefix)
Add a probabilistic term prefix.
- void [add_boolean_prefix](#) (const std::string &field, const std::string &prefix)
Add a boolean term prefix allowing the user to restrict a search with a boolean filter specified in the free text query.
- [TermIterator stoplist_begin](#) () const
Iterate over terms omitted from the query as stopwords.
- [TermIterator stoplist_end](#) () const
- [TermIterator unstem_begin](#) (const std::string &term) const
Iterate over unstemmed forms of the given (stemmed) term used in the query.
- [TermIterator unstem_end](#) (const std::string &) const
- void [add_valuerangeprocessor](#) ([Xapian::ValueRangeProcessor](#) *vrproc)
Register a [ValueRangeProcessor](#).
- std::string [get_corrected_query_string](#) () const
Get the spelling-corrected query string.
- std::string [get_description](#) () const
Return a string describing this object.

7.38.1 Detailed Description

Build a [Xapian::Query](#) object from a user query string.

7.38.2 Member Enumeration Documentation

7.38.2.1 enum [Xapian::QueryParser::feature_flag](#)

Enum of feature flags.

Enumerator:

FLAG_BOOLEAN Support AND, OR, etc and bracketed subexpressions.

FLAG_PHRASE Support quoted phrases.

FLAG_LOVEHATE Support + and -.

FLAG_BOOLEAN_ANY_CASE Support AND, OR, etc even if they aren't in ALLCAPS.

FLAG_WILDCARD Support right truncation (e.g. Xap*).

Currently you can't use wildcards with boolean filter prefixes, or in a phrase (either an explicitly quoted one, or one implicitly generated by hyphens or other punctuation).

NB: You need to tell the [QueryParser](#) object which database to expand wildcards from by calling `set_database`.

FLAG_PURE_NOT Allow queries such as 'NOT apples'.

These require the use of a list of all documents in the database which is potentially expensive, so this feature isn't enabled by default.

FLAG_PARTIAL Enable partial matching.

Partial matching causes the parser to treat the query as a "partially entered" search. This will automatically treat the final word as a wildcarded match, unless it is followed by whitespace, to produce more stable results from interactive searches.

Currently FLAG_PARTIAL doesn't do anything if the final word in the query has a boolean filter prefix, or if it is in a phrase (either an explicitly quoted one, or one implicitly generated by hyphens or other punctuation). It also doesn't do anything if the final word is part of a value range.

NB: You need to tell the [QueryParser](#) object which database to expand wildcards from by calling `set_database`.

FLAG_SPELLING_CORRECTION Enable spelling correction.

For each word in the query which doesn't exist as a term in the database, [Database::get_spelling_suggestion\(\)](#) will be called and if a suggestion is returned, a corrected version of the query string will be built up which can be read using [QueryParser::get_corrected_query_string\(\)](#). The query returned is based on the uncorrected query string however - if you want a parsed query based on the corrected query string, you must call [QueryParser::parse_query\(\)](#) again.

NB: You must also call [set_database\(\)](#) for this to work.

FLAG_SYNONYM Enable synonym operator '~'.

NB: You must also call [set_database\(\)](#) for this to work.

FLAG_AUTO_SYNONYMS Enable automatic use of synonyms for single terms.

NB: You must also call [set_database\(\)](#) for this to work.

FLAG_AUTO_MULTIWORD_SYNONYMS Enable automatic use of synonyms for single terms and groups of terms.

NB: You must also call [set_database\(\)](#) for this to work.

FLAG_DEFAULT The default flags.

Used if you don't explicitly pass any to [parse_query\(\)](#).

Added in [Xapian](#) 1.0.11.

7.38.3 Constructor & Destructor Documentation

7.38.3.1 Xapian::QueryParser::QueryParser (const QueryParser & o)

Copy constructor.

7.38.3.2 Xapian::QueryParser::QueryParser ()

Default constructor.

7.38.3.3 Xapian::QueryParser::~~QueryParser ()

Destructor.

7.38.4 Member Function Documentation

7.38.4.1 QueryParser& Xapian::QueryParser::operator= (const QueryParser & o)

Assignment.

7.38.4.2 void Xapian::QueryParser::set_stemmer (const Xapian::Stem & stemmer)

Set the stemmer.

This sets the stemming algorithm which will be used by the query parser. Note that the stemming algorithm will only be used according to the stemming strategy set by [set_stemming_strategy\(\)](#), which defaults to STEM_NONE. Therefore, to use a stemming algorithm, you will also need to call [set_stemming_strategy\(\)](#) with a value other than STEM_NONE.

7.38.4.3 void Xapian::QueryParser::set_stemming_strategy (stem_strategy strategy)

Set the stemming strategy.

This controls how the query parser will apply the stemming algorithm. The default value is STEM_NONE. The possible values are:

- STEM_NONE: Don't perform any stemming.

- **STEM_SOME**: Search for stemmed forms of terms except for those which start with a capital letter, or are followed by certain characters (currently: (/@<>=*[{"), or are used with operators which need positional information. Stemmed terms are prefixed with 'Z'.
- **STEM_ALL**: Search for stemmed forms of all words (note: no 'Z' prefix is added).

Note that the stemming algorithm is only applied to words in probabilistic fields - boolean filter terms are never stemmed.

7.38.4.4 void Xapian::QueryParser::set_stopper (const Stopper * stop = NULL)

Set the stopper.

7.38.4.5 void Xapian::QueryParser::set_default_op (Query::op default_op)

Set the default operator.

This operator is used to combine non-filter query items when no explicit operator is used.

The most useful values for this are OP_OR (the default) and OP_AND. OP_NEAR and OP_PHRASE can also be useful.

So for example, 'weather forecast' is parsed as if it were 'weather OR forecast' by default.

7.38.4.6 Query::op Xapian::QueryParser::get_default_op () const

Get the current default operator.

7.38.4.7 void Xapian::QueryParser::set_database (const Database & db)

Specify the database being searched.

The database is used for wildcard expansion (FLAG_WILDCARD and FLAG_PARTIAL), spelling correction (FLAG_SPELLING_CORRECTION), and synonyms (FLAG_SYNONYM, FLAG_AUTO_SYNONYMS, and FLAG_AUTO_MULTIWORD_SYNONYMS).

7.38.4.8 Query Xapian::QueryParser::parse_query (const std::string & query_string, unsigned flags = FLAG_PHRASE|FLAG_BOOLEAN|FLAG_LOVEHATE, const std::string & default_prefix = "")

Parse a query.

Parameters:

- query_string* A free-text query as entered by a user
- flags* Zero or more `Query::feature_flag` specifying what features the [Query-Parser](#) should support. Combine multiple values with bitwise-or (`|`) (default `FLAG_DEFAULT`).
- default_prefix* The default term prefix to use (default none). For example, you can pass "A" when parsing an "Author" field.

Exceptions:

If the query string can't be parsed, then [Xapian::QueryParserError](#) is thrown. You can get an English error message to report to the user by catching it and calling `get_msg()` on the caught exception. The current possible values (in case you want to translate them) are:

- Unknown range operation
- parse error
- Syntax: `<expression> AND <expression>`
- Syntax: `<expression> AND NOT <expression>`
- Syntax: `<expression> NOT <expression>`
- Syntax: `<expression> OR <expression>`
- Syntax: `<expression> XOR <expression>`

7.38.4.9 void Xapian::QueryParser::add_prefix (const std::string & field, const std::string & prefix)

Add a probabilistic term prefix.

For example:

```
qp.add_prefix("author", "A");
```

This allows the user to search for `author:Orwell` which will be converted to a search for the term "Aorwell".

Multiple fields can be mapped to the same prefix. For example, you can make `title:` and `subject:` aliases for each other.

As of 1.0.4, you can call this method multiple times with the same value of `field` to allow a single field to be mapped to multiple prefixes. Multiple terms being generated for such a field, and combined with [Xapian::Query::OP_OR](#).

If any prefixes are specified for the empty field name (i.e. you call this method with an empty string as the first parameter) these prefixes will be used for terms without a field specifier. If you do this and also specify the `default_prefix` parameter to [parse_query\(\)](#), then the `default_prefix` parameter will override.

If the prefix parameter is empty, then "field:word" will produce the term "word" (and this can be one of several prefixes for a particular field, or for terms without a field specifier).

If you call `add_prefix()` and `add_boolean_prefix()` for the same value of *field*, a `Xapian::InvalidOperationError` exception will be thrown.

In 1.0.3 and earlier, subsequent calls to this method with the same value of *field* had no effect.

Parameters:

field The user visible field name

prefix The term prefix to map this to

7.38.4.10 void Xapian::QueryParser::add_boolean_prefix (const std::string &field, const std::string &prefix)

Add a boolean term prefix allowing the user to restrict a search with a boolean filter specified in the free text query.

For example:

```
qp.add_boolean_prefix("site", "H");
```

This allows the user to restrict a search with `site:xapian.org` which will be converted to `Hxapian.org` combined with any probabilistic query with `Xapian::Query::OP_FILTER`.

If multiple boolean filters are specified in a query for the same prefix, they will be combined with the `Xapian::Query::OP_OR` operator. Then, if there are boolean filters for different prefixes, they will be combined with the `Xapian::Query::OP_AND` operator.

Multiple fields can be mapped to the same prefix (so for example you can make `site:` and `domain:` aliases for each other). Instances of fields with different aliases but the same prefix will still be combined with the OR operator.

For example, if "site" and "domain" map to "H", but author maps to "A", a search for "site:foo domain:bar author:Fred" will map to "(Hfoo OR Hbar) AND Afred".

As of 1.0.4, you can call this method multiple times with the same value of *field* to allow a single field to be mapped to multiple prefixes. Multiple terms being generated for such a field, and combined with `Xapian::Query::OP_OR`.

Calling this method with an empty string for *field* will cause a `Xapian::InvalidArgumentError`.

If you call `add_prefix()` and `add_boolean_prefix()` for the same value of *field*, a `Xapian::InvalidOperationError` exception will be thrown.

In 1.0.3 and earlier, subsequent calls to this method with the same value of *field* had no effect.

Parameters:

- field* The user visible field name
prefix The term prefix to map this to

7.38.4.11 TermIterator Xapian::QueryParser::stoplist_begin () const

Iterate over terms omitted from the query as stopwords.

7.38.4.12 TermIterator Xapian::QueryParser::unstem_begin (const std::string & term) const

Iterate over unstemmed forms of the given (stemmed) term used in the query.

7.38.4.13 void Xapian::QueryParser::add_valuerangeprocessor (Xapian::ValueRangeProcessor * vrproc)

Register a [ValueRangeProcessor](#).

7.38.4.14 std::string Xapian::QueryParser::get_corrected_query_string () const

Get the spelling-corrected query string.

This will only be set if FLAG_SPELLING_CORRECTION is specified when [QueryParser::parse_query\(\)](#) was last called.

If there were no corrections, an empty string is returned.

7.38.4.15 std::string Xapian::QueryParser::get_description () const

Return a string describing this object.


The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.39 Xapian::QueryParserError Class Reference

Indicates a query string can't be parsed.

Inheritance diagram for Xapian::QueryParserError:



Public Member Functions

- [QueryParserError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [QueryParserError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.39.1 Detailed Description

Indicates a query string can't be parsed.

7.39.2 Constructor & Destructor Documentation

7.39.2.1 Xapian::QueryParserError::QueryParserError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.39.2.2 Xapian::QueryParserError::QueryParserError (const std::string &msg_, int errno_) [inline]

Construct from message and errno value.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.40 Xapian::RangeError Class Reference

[RangeError](#) indicates an attempt to access outside the bounds of a container.

Inheritance diagram for Xapian::RangeError:



Public Member Functions

- [RangeError](#) (const std::string &msg_, const std::string &context_="", int errno_ = 0)
General purpose constructor which allows setting errno.
- [RangeError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.40.1 Detailed Description

[RangeError](#) indicates an attempt to access outside the bounds of a container.

7.40.2 Constructor & Destructor Documentation

7.40.2.1 Xapian::RangeError::RangeError (const std::string & msg_, const std::string & context_ = "", int errno_ = 0) [inline, explicit]

General purpose constructor which allows setting errno.

7.40.2.2 Xapian::RangeError::RangeError (const std::string & msg_, int errno_) [inline]

Construct from message and errno value.

The documentation for this class was generated from the following file:

- xapian/[error.h](#)

7.41 Xapian::RSet Class Reference

A relevance set (R-Set).

Public Member Functions

- [RSet](#) (const [RSet](#) &rset)
Copy constructor.
- void [operator=](#) (const [RSet](#) &rset)
Assignment operator.
- [RSet](#) ()
Default constructor.
- [~RSet](#) ()
Destructor.
- [Xapian::doccount size](#) () const
The number of documents in this R-Set.
- bool [empty](#) () const
Test if this R-Set is empty.
- void [add_document](#) ([Xapian::docid](#) did)
Add a document to the relevance set.
- void [add_document](#) (const [Xapian::MSetIterator](#) &i)
Add a document to the relevance set.
- void [remove_document](#) ([Xapian::docid](#) did)
Remove a document from the relevance set.
- void [remove_document](#) (const [Xapian::MSetIterator](#) &i)
Remove a document from the relevance set.
- bool [contains](#) ([Xapian::docid](#) did) const
Test if a given document in the relevance set.
- bool [contains](#) (const [Xapian::MSetIterator](#) &i) const
Test if a given document in the relevance set.
- std::string [get_description](#) () const
Return a string describing this object.

Public Attributes

- Xapian::Internal::RefCntPtr< Internal > **internal**

7.41.1 Detailed Description

A relevance set (R-Set).

This is the set of documents which are marked as relevant, for use in modifying the term weights, and in performing query expansion.

7.41.2 Constructor & Destructor Documentation

7.41.2.1 Xapian::RSet::RSet (const RSet & *rset*)

Copy constructor.

7.41.2.2 Xapian::RSet::RSet ()

Default constructor.

7.41.2.3 Xapian::RSet::~~RSet ()

Destructor.

7.41.3 Member Function Documentation

7.41.3.1 void Xapian::RSet::operator= (const RSet & *rset*)

Assignment operator.

7.41.3.2 Xapian::doccount Xapian::RSet::size () const

The number of documents in this R-Set.

7.41.3.3 bool Xapian::RSet::empty () const

Test if this R-Set is empty.

7.41.3.4 void Xapian::RSet::add_document (Xapian::docid *did*)

Add a document to the relevance set.

7.41.3.5 `void Xapian::RSet::add_document (const Xapian::MSetIterator & i)`
[inline]

Add a document to the relevance set.

7.41.3.6 `void Xapian::RSet::remove_document (Xapian::docid did)`

Remove a document from the relevance set.

7.41.3.7 `void Xapian::RSet::remove_document (const Xapian::MSetIterator & i)` [inline]

Remove a document from the relevance set.

7.41.3.8 `bool Xapian::RSet::contains (Xapian::docid did) const`

Test if a given document in the relevance set.

7.41.3.9 `bool Xapian::RSet::contains (const Xapian::MSetIterator & i) const`
[inline]

Test if a given document in the relevance set.

7.41.3.10 `std::string Xapian::RSet::get_description () const`

Return a string describing this object.


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.42 Xapian::RuntimeError Class Reference

The base class for exceptions indicating errors only detectable at runtime.

Inheritance diagram for Xapian::RuntimeError:

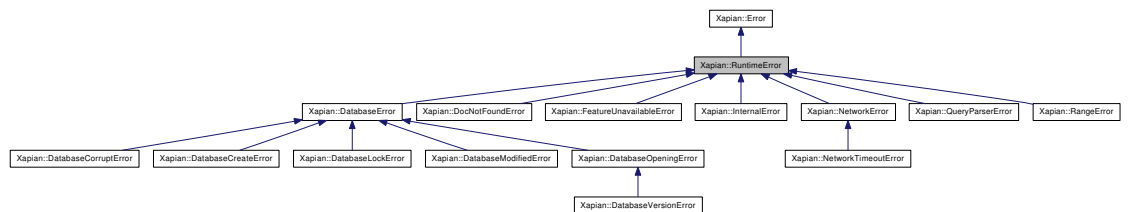

7.42.1 Detailed Description

The base class for exceptions indicating errors only detectable at runtime.

A subclass of [RuntimeError](#) will be thrown if [Xapian](#) detects an error which is exception derived from [RuntimeError](#) is thrown when an error is caused by problems with the data or environment rather than a programming mistake.


The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.43 Xapian::SimpleStopper Class Reference

Simple implementation of [Stopper](#) class - this will suit most users.

Inheritance diagram for Xapian::SimpleStopper:



Public Member Functions

- [SimpleStopper](#) ()
Default constructor.
- `template<class Iterator>`
[SimpleStopper](#) (Iterator begin, Iterator end)
Initialise from a pair of iterators.
- `void` [add](#) (const std::string &word)
Add a single stop word.
- `virtual bool` [operator\(\)](#) (const std::string &term) const
Is term a stop-word?
- `virtual` [~SimpleStopper](#) ()
Destructor.
- `virtual std::string` [get_description](#) () const
Return a string describing this object.

7.43.1 Detailed Description

Simple implementation of [Stopper](#) class - this will suit most users.

7.43.2 Constructor & Destructor Documentation

7.43.2.1 Xapian::SimpleStopper::SimpleStopper () `[inline]`

Default constructor.

7.43.2.2 `template<class Iterator> Xapian::SimpleStopper::SimpleStopper
(Iterator begin, Iterator end)` [inline]

Initialise from a pair of iterators.

7.43.2.3 `virtual Xapian::SimpleStopper::~~SimpleStopper ()` [inline,
virtual]

Destructor.

7.43.3 Member Function Documentation

7.43.3.1 `void Xapian::SimpleStopper::add (const std::string & word)`
[inline]

Add a single stop word.

7.43.3.2 `virtual bool Xapian::SimpleStopper::operator() (const std::string &
term) const` [inline, virtual]

Is term a stop-word?

Implements [Xapian::Stopper](#).

7.43.3.3 `virtual std::string Xapian::SimpleStopper::get_description () const`
[virtual]

Return a string describing this object.

Reimplemented from [Xapian::Stopper](#).


The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.44 Xapian::Sorter Class Reference

Virtual base class for sorter functor.

Inheritance diagram for Xapian::Sorter:



Public Member Functions

- virtual std::string [operator\(\)](#) (const [Xapian::Document](#) &doc) const=0
This method takes a [Document](#) object and builds a sort key from it.
- virtual [~Sorter](#) ()
Virtual destructor, because we have virtual methods.

7.44.1 Detailed Description

Virtual base class for sorter functor.

7.44.2 Constructor & Destructor Documentation

7.44.2.1 virtual Xapian::Sorter::~~Sorter () [virtual]

Virtual destructor, because we have virtual methods.

7.44.3 Member Function Documentation

7.44.3.1 virtual std::string Xapian::Sorter::operator() (const Xapian::Document & doc) const [pure virtual]

This method takes a [Document](#) object and builds a sort key from it.

Documents are then ordered by a string compare on the sort keys.

Implemented in [Xapian::MultiValueSorter](#).

The documentation for this class was generated from the following file:

- [xapian/sorter.h](#)

7.45 Xapian::Stem Class Reference

Class representing a stemming algorithm.

Public Member Functions

- [Stem](#) (const [Stem](#) &o)
Copy constructor.
- void [operator=](#) (const [Stem](#) &o)
Assignment.
- [Stem](#) ()
Construct a [Xapian::Stem](#) object which doesn't change terms.
- [Stem](#) (const std::string &language)
Construct a [Xapian::Stem](#) object for a particular language.
- [~Stem](#) ()
Destructor.
- std::string [operator\(\)](#) (const std::string &word) const
[Stem](#) a word.
- std::string [get_description](#) () const
Return a string describing this object.

Static Public Member Functions

- static std::string [get_available_languages](#) ()
Return a list of available languages.

7.45.1 Detailed Description

Class representing a stemming algorithm.

7.45.2 Constructor & Destructor Documentation

7.45.2.1 Xapian::Stem::Stem (const Stem & o)

Copy constructor.

7.45.2.2 Xapian::Stem::Stem ()

Construct a [Xapian::Stem](#) object which doesn't change terms.

Equivalent to [Stem](#)("none").

7.45.2.3 Xapian::Stem::Stem (const std::string & language) [explicit]

Construct a [Xapian::Stem](#) object for a particular language.

Parameters:

language Either the English name for the language or the two letter ISO639 code.

The following language names are understood (aliases follow the name):

- none - don't stem terms
- danish (da)
- dutch (nl)
- english (en) - Martin Porter's 2002 revision of his stemmer
- english_lovins (lovins) - Lovin's stemmer
- english_porter (porter) - Porter's stemmer as described in his 1980 paper
- finnish (fi)
- french (fr)
- german (de)
- german2 - Normalises umlauts and ß
- hungarian (hu)
- italian (it)
- kraaij_pohlmann - A different Dutch stemmer
- norwegian (nb, nn, no)
- portuguese (pt)
- romanian (ro)
- russian (ru)
- spanish (es)
- swedish (sv)
- turkish (tr)

Exceptions:

[Xapian::InvalidArgumentError](#) is thrown if language isn't recognised.

7.45.2.4 Xapian::Stem::~~Stem ()

Destructor.

7.45.3 Member Function Documentation

7.45.3.1 void Xapian::Stem::operator= (const Stem & o)

Assignment.

7.45.3.2 std::string Xapian::Stem::operator() (const std::string & word) const

[Stem](#) a word.

Parameters:

word a word to stem.

Returns:

the stem

7.45.3.3 std::string Xapian::Stem::get_description () const

Return a string describing this object.

7.45.3.4 static std::string Xapian::Stem::get_available_languages () [static]

Return a list of available languages.

Each stemmer is only included once in the list (not once for each alias). The name included is the English name of the language.

The list is returned as a string, with language names separated by spaces. This is a static method, so a [Xapian::Stem](#) object is not required for this operation.


The documentation for this class was generated from the following file:

- [xapian/stem.h](#)

7.46 Xapian::Stopper Class Reference

Base class for stop-word decision functor.

Inheritance diagram for Xapian::Stopper:



Public Member Functions

- virtual bool [operator\(\)](#) (const std::string &term) const =0
Is term a stop-word?
- virtual [~Stopper](#) ()
Class has virtual methods, so provide a virtual destructor.
- virtual std::string [get_description](#) () const
Return a string describing this object.

7.46.1 Detailed Description

Base class for stop-word decision functor.

7.46.2 Constructor & Destructor Documentation

7.46.2.1 virtual Xapian::Stopper::~~Stopper () [inline, virtual]

Class has virtual methods, so provide a virtual destructor.

7.46.3 Member Function Documentation

7.46.3.1 virtual bool Xapian::Stopper::operator() (const std::string & term) const [pure virtual]

Is term a stop-word?

Implemented in [Xapian::SimpleStopper](#).

7.46.3.2 `virtual std::string Xapian::Stopper::get_description () const` [virtual]

Return a string describing this object.

Reimplemented in [Xapian::SimpleStopper](#).


The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.47 Xapian::StringValueRangeProcessor Class Reference

Handle a string range.

Inheritance diagram for Xapian::StringValueRangeProcessor:



Public Member Functions

- [StringValueRangeProcessor](#) ([Xapian::valueno](#) valno_)
Constructor.
- [Xapian::valueno operator\(\)](#) (std::string &, std::string &)
Any strings are valid as begin and end.

7.47.1 Detailed Description

Handle a string range.

The end points can be any strings.

7.47.2 Constructor & Destructor Documentation

7.47.2.1 Xapian::StringValueRangeProcessor::StringValueRangeProcessor (Xapian::valueno valno_) [inline]

Constructor.

Parameters:

valno_ The value number to return from operator().

7.47.3 Member Function Documentation

7.47.3.1 Xapian::valueno Xapian::StringValueRangeProcessor::operator() (std::string &, std::string &) [inline, virtual]

Any strings are valid as begin and end.

Implements [Xapian::ValueRangeProcessor](#).

The documentation for this class was generated from the following file:

- [xapian/queryparser.h](#)

7.48 Xapian::TermGenerator Class Reference

Parses a piece of text and generate terms.

Public Types

- enum [flags](#) { [FLAG_SPELLING](#) = 128 }
Flags to OR together and pass to [TermGenerator::set_flags\(\)](#).

Public Member Functions

- [TermGenerator](#) (const [TermGenerator](#) &o)
Copy constructor.
- [TermGenerator](#) & operator= (const [TermGenerator](#) &o)
Assignment.
- [TermGenerator](#) ()
Default constructor.
- ~[TermGenerator](#) ()
Destructor.
- void [set_stemmer](#) (const [Xapian::Stem](#) &stemmer)
Set the [Xapian::Stem](#) object to be used for generating stemmed terms.
- void [set_stopper](#) (const [Xapian::Stopper](#) *stop=NULL)
Set the [Xapian::Stopper](#) object to be used for identifying stopwords.
- void [set_document](#) (const [Xapian::Document](#) &doc)
Set the current document.
- const [Xapian::Document](#) & [get_document](#) () const
Get the current document.
- void [set_database](#) (const [Xapian::WritableDatabase](#) &db)
Set the database to index spelling data to.
- [flags](#) [set_flags](#) ([flags](#) toggle, [flags](#) mask=[flags](#)(0))
Set flags.
- void [index_text](#) (const [Xapian::Utf8Iterator](#) &itor, [Xapian::termcount](#) weight=1, const std::string &prefix="")
Index some text.

- void [index_text](#) (const std::string &text, [Xapian::termcount](#) weight=1, const std::string &prefix="")
Index some text in a std::string.
- void [index_text_without_positions](#) (const [Xapian::Utf8Iterator](#) &itor, [Xapian::termcount](#) weight=1, const std::string &prefix="")
Index some text without positional information.
- void [index_text_without_positions](#) (const std::string &text, [Xapian::termcount](#) weight=1, const std::string &prefix="")
Index some text in a std::string without positional information.
- void [increase_termpos](#) ([Xapian::termcount](#) delta=100)
Increase the termpos used by index_text by delta.
- [Xapian::termcount](#) [get_termpos](#) () const
Get the current term position.
- void [set_termpos](#) ([Xapian::termcount](#) termpos)
Set the current term position.
- std::string [get_description](#) () const
Return a string describing this object.

7.48.1 Detailed Description

Parses a piece of text and generate terms.

This module takes a piece of text and parses it to produce words which are then used to generate suitable terms for indexing. The terms generated are suitable for use with [Query](#) objects produced by the [QueryParser](#) class.

7.48.2 Member Enumeration Documentation

7.48.2.1 enum [Xapian::TermGenerator::flags](#)

Flags to OR together and pass to [TermGenerator::set_flags\(\)](#).

Enumerator:

FLAG_SPELLING Index data required for spelling correction.

7.48.3 Constructor & Destructor Documentation

7.48.3.1 Xapian::TermGenerator::TermGenerator (const TermGenerator & o)

Copy constructor.

7.48.3.2 Xapian::TermGenerator::TermGenerator ()

Default constructor.

7.48.3.3 Xapian::TermGenerator::~~TermGenerator ()

Destructor.

7.48.4 Member Function Documentation

7.48.4.1 TermGenerator& Xapian::TermGenerator::operator= (const TermGenerator & o)

Assignment.

7.48.4.2 void Xapian::TermGenerator::set_stemmer (const Xapian::Stem & stemmer)

Set the [Xapian::Stem](#) object to be used for generating stemmed terms.

7.48.4.3 void Xapian::TermGenerator::set_stopper (const Xapian::Stopper * stop = NULL)

Set the [Xapian::Stopper](#) object to be used for identifying stopwords.

Stemmed forms of stopwords aren't indexed, but unstemmed forms still are so that searches for phrases including stop words still work.

7.48.4.4 void Xapian::TermGenerator::set_document (const Xapian::Document & doc)

Set the current document.

7.48.4.5 const Xapian::Document& Xapian::TermGenerator::get_document () const

Get the current document.

7.48.4.6 void Xapian::TermGenerator::set_database (const Xapian::WritableDatabase & db)

Set the database to index spelling data to.

7.48.4.7 flags Xapian::TermGenerator::set_flags (flags *toggle*, flags *mask* = flags(0))

Set flags.

The new value of flags is: (flags & mask) ^ toggle

To just set the flags, pass the new flags in toggle and the default value for mask.

Parameters:

toggle Flags to XOR.

mask Flags to AND with first.

Returns:

The old flags setting.

7.48.4.8 void Xapian::TermGenerator::index_text (const Xapian::Utf8Iterator & itor, Xapian::termcount *weight* = 1, const std::string & *prefix* = "")

Index some text.

Parameters:

weight The wdf increment (default 1).

prefix The term prefix to use (default is no prefix).

**7.48.4.9 void Xapian::TermGenerator::index_text (const std::string & text, Xapian::termcount *weight* = 1, const std::string & *prefix* = "")
[inline]**

Index some text in a std::string.

Parameters:

weight The wdf increment (default 1).

prefix The term prefix to use (default is no prefix).

7.48.4.10 `void Xapian::TermGenerator::index_text_without_positions (const Xapian::Utf8Iterator & itor, Xapian::termcount weight = 1, const std::string & prefix = "")`

Index some text without positional information.

Just like `index_text`, but no positional information is generated. This means that the database will be significantly smaller, but that phrase searching and NEAR won't be supported.

7.48.4.11 `void Xapian::TermGenerator::index_text_without_positions (const std::string & text, Xapian::termcount weight = 1, const std::string & prefix = "") [inline]`

Index some text in a `std::string` without positional information.

Just like `index_text`, but no positional information is generated. This means that the database will be significantly smaller, but that phrase searching and NEAR won't be supported.

7.48.4.12 `void Xapian::TermGenerator::increase_termpos (Xapian::termcount delta = 100)`

Increase the termpos used by `index_text` by *delta*.

This can be used to prevent phrase searches from spanning two unconnected blocks of text (e.g. the title and body text).

7.48.4.13 `Xapian::termcount Xapian::TermGenerator::get_termpos () const`

Get the current term position.

7.48.4.14 `void Xapian::TermGenerator::set_termpos (Xapian::termcount termpos)`

Set the current term position.

7.48.4.15 `std::string Xapian::TermGenerator::get_description () const`

Return a string describing this object.

The documentation for this class was generated from the following file:

- [xapian/termgenerator.h](#)

7.49 Xapian::TermIterator Class Reference

An iterator pointing to items in a list of terms.

Public Types

- typedef std::input_iterator_tag [iterator_category](#)
Allow use as an STL iterator.
- typedef std::string [value_type](#)
Allow use as an STL iterator.
- typedef [Xapian::termcount_diff](#) [difference_type](#)
Allow use as an STL iterator.
- typedef std::string * [pointer](#)
Allow use as an STL iterator.
- typedef std::string & [reference](#)
Allow use as an STL iterator.

Public Member Functions

- **TermIterator** (Internal *internal_)
- [TermIterator](#) ()
Default constructor - for declaring an uninitialised iterator.
- [~TermIterator](#) ()
Destructor.
- [TermIterator](#) (const [TermIterator](#) &other)
Copying is allowed.
- void [operator=](#) (const [TermIterator](#) &other)
Assignment is allowed.
- std::string [operator*](#) () const
Return the current term.
- [TermIterator](#) & [operator++](#) ()
- TermNameWrapper [operator++](#) (int)
- void [skip_to](#) (const std::string &tname)
Skip the iterator to term tname, or the first term after tname if tname isn't in the list of terms being iterated.
- [Xapian::termcount](#) [get_wdf](#) () const

Return the wdf of the current term (if meaningful).

- [Xapian::doccount get_termfreq \(\)](#) const
Return the term frequency of the current term (if meaningful).
- [Xapian::termcount positionlist_count \(\)](#) const
Return length of positionlist for current term.
- [PositionIterator positionlist_begin \(\)](#) const
Return [PositionIterator](#) pointing to start of positionlist for current term.
- [PositionIterator positionlist_end \(\)](#) const
Return [PositionIterator](#) pointing to end of positionlist for current term.
- [std::string get_description \(\)](#) const
Return a string describing this object.

Public Attributes

- [Xapian::Internal::RefCntPtr< Internal > internal](#)

7.49.1 Detailed Description

An iterator pointing to items in a list of terms.

7.49.2 Member Typedef Documentation

7.49.2.1 `typedef std::input_iterator_tag Xapian::TermIterator::iterator_category`

Allow use as an STL iterator.

7.49.2.2 `typedef std::string Xapian::TermIterator::value_type`

Allow use as an STL iterator.

7.49.2.3 `typedef Xapian::termcount_diff Xapian::TermIterator::difference_type`

Allow use as an STL iterator.

7.49.2.4 `typedef std::string* Xapian::TermIterator::pointer`

Allow use as an STL iterator.

7.49.2.5 `typedef std::string& Xapian::TermIterator::reference`

Allow use as an STL iterator.

7.49.3 Constructor & Destructor Documentation

7.49.3.1 `Xapian::TermIterator::TermIterator ()`

Default constructor - for declaring an uninitialised iterator.

7.49.3.2 `Xapian::TermIterator::~~TermIterator ()`

Destructor.

7.49.3.3 `Xapian::TermIterator::TermIterator (const TermIterator & other)`

Copying is allowed.

The internals are reference counted, so copying is also cheap.

7.49.4 Member Function Documentation

7.49.4.1 `void Xapian::TermIterator::operator= (const TermIterator & other)`

Assignment is allowed.

The internals are reference counted, so assignment is also cheap.

7.49.4.2 `std::string Xapian::TermIterator::operator * () const`

Return the current term.

7.49.4.3 `void Xapian::TermIterator::skip_to (const std::string & tname)`

Skip the iterator to term *tname*, or the first term after *tname* if *tname* isn't in the list of terms being iterated.

7.49.4.4 `Xapian::termcount Xapian::TermIterator::get_wdf () const`

Return the wdf of the current term (if meaningful).

The wdf (within document frequency) is the number of occurrences of a term in a particular document.

7.49.4.5 Xapian::doccount Xapian::TermIterator::get_termfreq () const

Return the term frequency of the current term (if meaningful).

The term frequency is the number of documents which a term indexes.

7.49.4.6 Xapian::termcount Xapian::TermIterator::positionlist_count () const

Return length of positionlist for current term.

7.49.4.7 PositionIterator Xapian::TermIterator::positionlist_begin () const

Return [PositionIterator](#) pointing to start of positionlist for current term.

7.49.4.8 PositionIterator Xapian::TermIterator::positionlist_end () const
[inline]

Return [PositionIterator](#) pointing to end of positionlist for current term.

7.49.4.9 std::string Xapian::TermIterator::get_description () const

Return a string describing this object.


The documentation for this class was generated from the following file:

- [xapian/termiterator.h](#)

7.50 Xapian::TradWeight Class Reference

Traditional probabilistic weighting scheme.

Inheritance diagram for Xapian::TradWeight:



Public Member Functions

- `TradWeight` (double k)
Construct a *TradWeight*.
- `TradWeight * clone () const`
Return a new weight object of this type.
- `std::string name () const`
Name of the weighting scheme.
- `std::string serialise () const`
Serialise object parameters into a string.
- `TradWeight * unserialise (const std::string &s) const`
Create object given string serialisation returned by *serialise()*.
- `Xapian::weight get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const`
Get a weight which is part of the sum over terms being performed.
- `Xapian::weight get_maxpart () const`
Gets the maximum value that *get_sumpart()* may return.
- `Xapian::weight get_sumextra (Xapian::doclength len) const`
Get an extra weight for a document to add to the sum calculated over the query terms.
- `Xapian::weight get_maxextra () const`
Gets the maximum value that *get_sumextra()* may return.
- `bool get_sumpart_needs_doclength () const`
return false if the weight object doesn't need doclength

7.50.1 Detailed Description

Traditional probabilistic weighting scheme.

This class implements the Traditional Probabilistic Weighting scheme, as described by the early papers on Probabilistic Retrieval. BM25 generally gives better results.

The Traditional weighting scheme formula is

$$\sum_t \frac{f_{t,d}}{k.L_d + f_{t,d}} . w_t$$

where

- w_t is the termweight of term t
- $f_{t,d}$ is the within document frequency of term t in document d
- L_d is the normalised length of document d
- k is a user specifiable parameter

TradWeight(k) is equivalent to BM25Weight(k , 0, 0, 1, 0), except that the latter returns weights ($k+1$) times larger.

7.50.2 Constructor & Destructor Documentation

7.50.2.1 Xapian::TradWeight::TradWeight (double k) [inline, explicit]

Construct a [TradWeight](#).

Parameters:

- k parameter governing the importance of within document frequency and document length - any non-negative number (0 meaning to ignore wdf and doc length when calculating weights). Default is 1.

7.50.3 Member Function Documentation

7.50.3.1 TradWeight* Xapian::TradWeight::clone () const [virtual]

Return a new weight object of this type.

A subclass called FooWeight taking parameters param1 and param2 should implement this as:

```
virtual FooWeight * clone() const { return new FooWeight(param1, param2); }
```

Implements [Xapian::Weight](#).

7.50.3.2 `std::string Xapian::TradWeight::name () const` [virtual]

Name of the weighting scheme.

If the subclass is called FooWeight, this should return "Foo".

Implements [Xapian::Weight](#).

7.50.3.3 `std::string Xapian::TradWeight::serialise () const` [virtual]

Serialise object parameters into a string.

Implements [Xapian::Weight](#).

7.50.3.4 `TradWeight* Xapian::TradWeight::unserialise (const std::string & s) const` [virtual]

Create object given string serialisation returned by [serialise\(\)](#).

Implements [Xapian::Weight](#).

7.50.3.5 `Xapian::weight Xapian::TradWeight::get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const` [virtual]

Get a weight which is part of the sum over terms being performed.

This returns a weight for a given term and document. These weights are summed to give a total weight for the document.

Parameters:

wdf the within document frequency of the term.

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.50.3.6 `Xapian::weight Xapian::TradWeight::get_maxpart () const` [virtual]

Gets the maximum value that [get_sumpart\(\)](#) may return.

This is used in optimising searches, by having the postlist tree decay appropriately when parts of it can have limited, or no, further effect.

Implements [Xapian::Weight](#).

7.50.3.7 `Xapian::weight Xapian::TradWeight::get_sumextra (Xapian::doclength len) const` [virtual]

Get an extra weight for a document to add to the sum calculated over the query terms.

This returns a weight for a given document, and is used by some weighting schemes to account for influence such as document length.

Parameters:

len the (unnormalised) document length.

Implements [Xapian::Weight](#).

7.50.3.8 Xapian::weight Xapian::TradWeight::get_maxextra () const
[virtual]

Gets the maximum value that [get_sumextra\(\)](#) may return.

This is used in optimising searches.

Implements [Xapian::Weight](#).

7.50.3.9 bool Xapian::TradWeight::get_sumpart_needs_doclength () const
[virtual]

return false if the weight object doesn't need doclength

Reimplemented from [Xapian::Weight](#).


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.51 Xapian::UnimplementedError Class Reference

[UnimplementedError](#) indicates an attempt to use an unimplemented feature.

Inheritance diagram for Xapian::UnimplementedError:



Public Member Functions

- [UnimplementedError](#) (const std::string &msg_, const std::string &context_="", int errno_=0)
General purpose constructor which allows setting errno.
- [UnimplementedError](#) (const std::string &msg_, int errno_)
Construct from message and errno value.

7.51.1 Detailed Description

[UnimplementedError](#) indicates an attempt to use an unimplemented feature.

7.51.2 Constructor & Destructor Documentation

- 7.51.2.1 Xapian::UnimplementedError::UnimplementedError (const std::string &msg_, const std::string &context_ = "", int errno_ = 0) [inline, explicit]**

General purpose constructor which allows setting errno.

- 7.51.2.2 Xapian::UnimplementedError::UnimplementedError (const std::string &msg_, int errno_) [inline]**

Construct from message and errno value.

The documentation for this class was generated from the following file:

- [xapian/error.h](#)

7.52 Xapian::Utf8Iterator Class Reference

An iterator which returns [Unicode](#) character values from a UTF-8 encoded string.

Public Types

- typedef std::input_iterator_tag [iterator_category](#)
We implement the semantics of an STL input_iterator.
- typedef unsigned [value_type](#)
We implement the semantics of an STL input_iterator.
- typedef size_t [difference_type](#)
We implement the semantics of an STL input_iterator.
- typedef const unsigned * [pointer](#)
We implement the semantics of an STL input_iterator.
- typedef const unsigned & [reference](#)
We implement the semantics of an STL input_iterator.

Public Member Functions

- const char * [raw](#) () const
*Return the raw const char * pointer for the current position.*
- size_t [left](#) () const
Return the number of bytes left in the iterator's buffer.
- void [assign](#) (const char *p_, size_t len)
Assign a new string to the iterator.
- void [assign](#) (const std::string &s)
Assign a new string to the iterator.
- [Utf8Iterator](#) (const char *p_)
Create an iterator given a pointer to a null terminated string.
- [Utf8Iterator](#) (const char *p_, size_t len)
Create an iterator given a pointer and a length.
- [Utf8Iterator](#) (const std::string &s)
Create an iterator given a string.
- [Utf8Iterator](#) ()

Create an iterator which is at the end of its iteration.

- unsigned `operator * () const`
Get the current [Unicode](#) character value pointed to by the iterator.
- `Utf8Iterator operator++ (int)`
Move forward to the next [Unicode](#) character.
- `Utf8Iterator & operator++ ()`
Move forward to the next [Unicode](#) character.
- `bool operator== (const Utf8Iterator &other) const`
Test two [Utf8Iterators](#) for equality.
- `bool operator!= (const Utf8Iterator &other) const`
Test two [Utf8Iterators](#) for inequality.

7.52.1 Detailed Description

An iterator which returns [Unicode](#) character values from a UTF-8 encoded string.

7.52.2 Member Typedef Documentation

7.52.2.1 `typedef std::input_iterator_tag Xapian::Utf8Iterator::iterator_category`

We implement the semantics of an STL `input_iterator`.

7.52.2.2 `typedef unsigned Xapian::Utf8Iterator::value_type`

We implement the semantics of an STL `input_iterator`.

7.52.2.3 `typedef size_t Xapian::Utf8Iterator::difference_type`

We implement the semantics of an STL `input_iterator`.

7.52.2.4 `typedef const unsigned* Xapian::Utf8Iterator::pointer`

We implement the semantics of an STL `input_iterator`.

7.52.2.5 `typedef const unsigned& Xapian::Utf8Iterator::reference`

We implement the semantics of an STL `input_iterator`.

7.52.3 Constructor & Destructor Documentation

7.52.3.1 Xapian::Utf8Iterator::Utf8Iterator (const char * *p_*) [explicit]

Create an iterator given a pointer to a null terminated string.

The iterator will return characters from the start of the string when next called. The string is not copied into the iterator, so it must remain valid while the iteration is in progress.

Parameters:

p_ A pointer to the start of the null terminated string to read.

7.52.3.2 Xapian::Utf8Iterator::Utf8Iterator (const char * *p_*, size_t *len*) [inline]

Create an iterator given a pointer and a length.

The iterator will return characters from the start of the string when next called. The string is not copied into the iterator, so it must remain valid while the iteration is in progress.

Parameters:

p_ A pointer to the start of the string to read.

len The length of the string to read.

7.52.3.3 Xapian::Utf8Iterator::Utf8Iterator (const std::string & *s*) [inline]

Create an iterator given a string.

The iterator will return characters from the start of the string when next called. The string is not copied into the iterator, so it must remain valid while the iteration is in progress.

Parameters:

s The string to read. Must not be modified while the iteration is in progress.

7.52.3.4 Xapian::Utf8Iterator::Utf8Iterator () [inline]

Create an iterator which is at the end of its iteration.

This can be compared to another iterator to check if the other iterator has reached its end.

7.52.4 Member Function Documentation

7.52.4.1 `const char* Xapian::Utf8Iterator::raw () const` [inline]

Return the raw `const char *` pointer for the current position.

7.52.4.2 `size_t Xapian::Utf8Iterator::left () const` [inline]

Return the number of bytes left in the iterator's buffer.

7.52.4.3 `void Xapian::Utf8Iterator::assign (const char * p_, size_t len)` [inline]

Assign a new string to the iterator.

The iterator will forget the string it was iterating through, and return characters from the start of the new string when next called. The string is not copied into the iterator, so it must remain valid while the iteration is in progress.

Parameters:

p_ A pointer to the start of the string to read.

len The length of the string to read.

7.52.4.4 `void Xapian::Utf8Iterator::assign (const std::string & s)` [inline]

Assign a new string to the iterator.

The iterator will forget the string it was iterating through, and return characters from the start of the new string when next called. The string is not copied into the iterator, so it must remain valid while the iteration is in progress.

Parameters:

s The string to read. Must not be modified while the iteration is in progress.

7.52.4.5 `unsigned Xapian::Utf8Iterator::operator * () const`

Get the current [Unicode](#) character value pointed to by the iterator.

Returns `unsigned(-1)` if the iterator has reached the end of its buffer.

7.52.4.6 `Utf8Iterator Xapian::Utf8Iterator::operator++ (int)` [inline]

Move forward to the next [Unicode](#) character.

Returns:

An iterator pointing to the position before the move.

7.52.4.7 `Utf8Iterator& Xapian::Utf8Iterator::operator++ ()` `[inline]`

Move forward to the next [Unicode](#) character.

Returns:

A reference to this object.

7.52.4.8 `bool Xapian::Utf8Iterator::operator== (const Utf8Iterator & other)`
`const` `[inline]`

Test two Utf8Iterators for equality.

Returns:

true iff the iterators point to the same position.

7.52.4.9 `bool Xapian::Utf8Iterator::operator!= (const Utf8Iterator & other)`
`const` `[inline]`

Test two Utf8Iterators for inequality.

Returns:

true iff the iterators do not point to the same position.

The documentation for this class was generated from the following file:

- [xapian/unicode.h](#)

7.53 Xapian::ValueIterator Class Reference

An iterator pointing to values associated with a document.

Public Types

- typedef std::input_iterator_tag [iterator_category](#)
Allow use as an STL iterator.
- typedef std::string [value_type](#)
Allow use as an STL iterator.
- typedef [Xapian::valueno_diff](#) [difference_type](#)
Allow use as an STL iterator.
- typedef std::string * [pointer](#)
Allow use as an STL iterator.
- typedef std::string & [reference](#)
Allow use as an STL iterator.

Public Member Functions

- [ValueIterator](#) ()
Create an uninitialised iterator; this cannot be used, but is convenient syntactically.
- [ValueIterator](#) (const [ValueIterator](#) &other)
Copying is allowed (and is cheap).
- void [operator=](#) (const [ValueIterator](#) &other)
Assignment is allowed (and is cheap).
- [ValueIterator](#) & [operator++](#) ()
Advance the iterator.
- [ValueIterator](#) [operator++](#) (int)
Advance the iterator (postfix variant).
- const std::string & [operator*](#) () const
Get the value for the current position.
- const std::string * [operator→](#) () const
Get the value for the current position.
- [Xapian::valueno](#) [get_valueno](#) () const

Get the number of the value at the current position.

- `std::string get_description () const`

Return a string describing this object.

Friends

- `bool operator== (const ValueIterator &a, const ValueIterator &b)`

Equality test for ValueIterator objects.

- `bool operator!= (const ValueIterator &a, const ValueIterator &b)`

Inequality test for ValueIterator objects.

7.53.1 Detailed Description

An iterator pointing to values associated with a document.

7.53.2 Member Typedef Documentation

7.53.2.1 `typedef std::input_iterator_tag Xapian::ValueIterator::iterator_category`

Allow use as an STL iterator.

7.53.2.2 `typedef std::string Xapian::ValueIterator::value_type`

Allow use as an STL iterator.

7.53.2.3 `typedef Xapian::valueno_diff Xapian::ValueIterator::difference_type`

Allow use as an STL iterator.

7.53.2.4 `typedef std::string* Xapian::ValueIterator::pointer`

Allow use as an STL iterator.

7.53.2.5 `typedef std::string& Xapian::ValueIterator::reference`

Allow use as an STL iterator.

7.53.3 Constructor & Destructor Documentation

7.53.3.1 Xapian::ValueIterator::ValueIterator () [inline]

Create an uninitialised iterator; this cannot be used, but is convenient syntactically.

7.53.3.2 Xapian::ValueIterator::ValueIterator (const ValueIterator & *other*) [inline]

Copying is allowed (and is cheap).

7.53.4 Member Function Documentation

7.53.4.1 void Xapian::ValueIterator::operator= (const ValueIterator & *other*) [inline]

Assignment is allowed (and is cheap).

7.53.4.2 ValueIterator& Xapian::ValueIterator::operator++ () [inline]

Advance the iterator.

7.53.4.3 ValueIterator Xapian::ValueIterator::operator++ (int) [inline]

Advance the iterator (postfix variant).

7.53.4.4 const std::string& Xapian::ValueIterator::operator * () const

Get the value for the current position.

7.53.4.5 const std::string* Xapian::ValueIterator::operator → () const

Get the value for the current position.

7.53.4.6 Xapian::valueno Xapian::ValueIterator::get_valueno () const

Get the number of the value at the current position.

7.53.4.7 std::string Xapian::ValueIterator::get_description () const

Return a string describing this object.

7.53.5 Friends And Related Function Documentation

7.53.5.1 `bool operator==(const ValueIterator & a, const ValueIterator & b)`
[friend]

Equality test for [ValueIterator](#) objects.

7.53.5.2 `bool operator!=(const ValueIterator & a, const ValueIterator & b)`
[friend]

Inequality test for [ValueIterator](#) objects.


The documentation for this class was generated from the following file:

- [xapian/valueiterator.h](#)

7.54 Xapian::ValueRangeProcessor Struct Reference

Base class for value range processors.

Inheritance diagram for Xapian::ValueRangeProcessor:



Public Member Functions

- virtual [~ValueRangeProcessor](#) ()
Destructor.
- virtual [Xapian::valueno operator\(\)](#) (std::string &begin, std::string &end)=0
Check for a valid range of this type.

7.54.1 Detailed Description

Base class for value range processors.

7.54.2 Constructor & Destructor Documentation

7.54.2.1 virtual Xapian::ValueRangeProcessor::~~ValueRangeProcessor () [virtual]

Destructor.

7.54.3 Member Function Documentation

7.54.3.1 virtual Xapian::valueno Xapian::ValueRangeProcessor::operator() (std::string &begin, std::string &end) [pure virtual]

Check for a valid range of this type.

If this [ValueRangeProcessor](#) recognises BEGIN..END it returns the value number to range filter on. Otherwise it returns [Xapian::BAD_VALUENO](#).

Implemented in [Xapian::StringValueRangeProcessor](#), [Xapian::DateValueRangeProcessor](#), and [Xapian::NumberValueRangeProcessor](#).


The documentation for this struct was generated from the following file:

- [xapian/queryparser.h](#)

7.55 Xapian::Weight Class Reference

Abstract base class for weighting schemes.

Inheritance diagram for Xapian::Weight:



Public Member Functions

- `Weight * create (const Internal *internal_, Xapian::doclength querysize_, Xapian::termcount wqf_, const std::string &name_) const`
Create a new weight object of the same type as this and initialise it with the specified statistics.
- `virtual std::string name () const=0`
Name of the weighting scheme.
- `virtual std::string serialise () const=0`
Serialise object parameters into a string.
- `virtual Weight * unserialise (const std::string &s) const=0`
Create object given string serialisation returned by `serialise()`.
- `virtual Xapian::weight get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const=0`
Get a weight which is part of the sum over terms being performed.
- `virtual Xapian::weight get_maxpart () const=0`
Gets the maximum value that `get_sumpart()` may return.
- `virtual Xapian::weight get_sumextra (Xapian::doclength len) const=0`
Get an extra weight for a document to add to the sum calculated over the query terms.
- `virtual Xapian::weight get_maxextra () const=0`
Gets the maximum value that `get_sumextra()` may return.
- `virtual bool get_sumpart_needs_doclength () const`
return false if the weight object doesn't need doclength

Protected Member Functions

- **Weight** (const [Weight](#) &)

Protected Attributes

- const Internal * **internal**
- [Xapian::doclength](#) **querysize**
- [Xapian::termcount](#) **wqf**
- std::string **tname**

7.55.1 Detailed Description

Abstract base class for weighting schemes.

7.55.2 Member Function Documentation

7.55.2.1 **Weight* Xapian::Weight::create (const Internal * *internal_*, Xapian::doclength *querysize_*, Xapian::termcount *wqf_*, const std::string & *tname_*) const**

Create a new weight object of the same type as this and initialise it with the specified statistics.

You shouldn't call this method yourself - it's called by [Enquire](#).

Parameters:

- internal_* Object to ask for collection statistics.
- querysize_* [Query](#) size.
- wqf_* Within query frequency of term this object is associated with.
- tname_* Term which this object is associated with.

7.55.2.2 **virtual std::string Xapian::Weight::name () const** [pure virtual]

Name of the weighting scheme.

If the subclass is called FooWeight, this should return "Foo".

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.3 **virtual std::string Xapian::Weight::serialise () const** [pure virtual]

Serialise object parameters into a string.

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.4 `virtual Weight* Xapian::Weight::unserialise (const std::string & s) const` [pure virtual]

Create object given string serialisation returned by [serialise\(\)](#).

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.5 `virtual Xapian::weight Xapian::Weight::get_sumpart (Xapian::termcount wdf, Xapian::doclength len) const` [pure virtual]

Get a weight which is part of the sum over terms being performed.

This returns a weight for a given term and document. These weights are summed to give a total weight for the document.

Parameters:

wdf the within document frequency of the term.

len the (unnormalised) document length.

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.6 `virtual Xapian::weight Xapian::Weight::get_maxpart () const` [pure virtual]

Gets the maximum value that [get_sumpart\(\)](#) may return.

This is used in optimising searches, by having the postlist tree decay appropriately when parts of it can have limited, or no, further effect.

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.7 `virtual Xapian::weight Xapian::Weight::get_sumextra (Xapian::doclength len) const` [pure virtual]

Get an extra weight for a document to add to the sum calculated over the query terms.

This returns a weight for a given document, and is used by some weighting schemes to account for influence such as document length.

Parameters:

len the (unnormalised) document length.

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.8 `virtual Xapian::weight Xapian::Weight::get_maxextra () const` [pure virtual]

Gets the maximum value that [get_sumextra\(\)](#) may return.

This is used in optimising searches.

Implemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).

7.55.2.9 `virtual bool Xapian::Weight::get_sumpart_needs_doclength () const` [virtual]

return false if the weight object doesn't need doclength

Reimplemented in [Xapian::BoolWeight](#), [Xapian::BM25Weight](#), and [Xapian::TradWeight](#).


The documentation for this class was generated from the following file:

- [xapian/enquire.h](#)

7.56 Xapian::WritableDatabase Class Reference

This class provides read/write access to a database.

Inheritance diagram for Xapian::WritableDatabase:



Public Member Functions

- virtual [~WritableDatabase](#) ()
Destroy this handle on the database.
- [WritableDatabase](#) ()
Create an empty [WritableDatabase](#).
- [WritableDatabase](#) (const std::string &path, int action)
Open a database for update, automatically determining the database backend to use.
- [WritableDatabase](#) (const [WritableDatabase](#) &other)
Copying is allowed.
- void [operator=](#) (const [WritableDatabase](#) &other)
Assignment is allowed.
- void [flush](#) ()
Commit any pending modifications made to the database.
- void [begin_transaction](#) (bool flushed=true)
Begin a transaction.
- void [commit_transaction](#) ()
Complete the transaction currently in progress.
- void [cancel_transaction](#) ()
Abort the transaction currently in progress, discarding the pending modifications made to the database.
- [Xapian::docid](#) [add_document](#) (const [Xapian::Document](#) &document)
Add a new document to the database.
- void [delete_document](#) ([Xapian::docid](#) did)

Delete a document from the database.

- void `delete_document` (const std::string &unique_term)

Delete any documents indexed by a term from the database.

- void `replace_document` (Xapian::docid did, const Xapian::Document &document)

Replace a given document in the database.

- Xapian::docid `replace_document` (const std::string &unique_term, const Xapian::Document &document)

Replace any documents matching a term.

- void `add_spelling` (const std::string &word, Xapian::termcount freqinc=1) const

Add a word to the spelling dictionary.

- void `remove_spelling` (const std::string &word, Xapian::termcount freqdec=1) const

Remove a word from the spelling dictionary.

- void `add_synonym` (const std::string &term, const std::string &synonym) const

Add a synonym for a term.

- void `remove_synonym` (const std::string &term, const std::string &synonym) const

Remove a synonym for a term.

- void `clear_synonyms` (const std::string &term) const

Remove all synonyms for a term.

- void `set_metadata` (const std::string &key, const std::string &value)

Set the user-specified metadata associated with a given key.

- std::string `get_description` () const

Return a string describing this object.

7.56.1 Detailed Description

This class provides read/write access to a database.

7.56.2 Constructor & Destructor Documentation

7.56.2.1 virtual Xapian::WritableDatabase::~~WritableDatabase () [virtual]

Destroy this handle on the database.

If there are no copies of this object remaining, the database will be closed. If there are any transactions in progress these will be aborted as if `cancel_transaction` had been called.

7.56.2.2 Xapian::WritableDatabase::WritableDatabase ()

Create an empty [WritableDatabase](#).

7.56.2.3 Xapian::WritableDatabase::WritableDatabase (const std::string & *path*, int *action*)

Open a database for update, automatically determining the database backend to use.

If the database is to be created, [Xapian](#) will try to create the directory indicated by *path* if it doesn't already exist (but only the leaf directory, not recursively).

Parameters:

path directory that the database is stored in.

action one of:

- [Xapian::DB_CREATE_OR_OPEN](#) open for read/write; create if no db exists
- [Xapian::DB_CREATE](#) create new database; fail if db exists
- [Xapian::DB_CREATE_OR_OVERWRITE](#) overwrite existing db; create if none exists
- [Xapian::DB_OPEN](#) open for read/write; fail if no db exists

Exceptions:

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

[Xapian::DatabaseLockError](#) will be thrown if a lock couldn't be acquired on the database.

7.56.2.4 Xapian::WritableDatabase::WritableDatabase (const WritableDatabase & *other*)

Copying is allowed.

The internals are reference counted, so copying is cheap.

7.56.3 Member Function Documentation

7.56.3.1 `void Xapian::WritableDatabase::operator= (const WritableDatabase & other)`

Assignment is allowed.

The internals are reference counted, so assignment is cheap.

Note that only an [WritableDatabase](#) may be assigned to an [WritableDatabase](#): an attempt to assign a [Database](#) is caught at compile-time.

7.56.3.2 `void Xapian::WritableDatabase::flush ()`

Commit any pending modifications made to the database.

For efficiency reasons, when performing multiple updates to a database it is best (indeed, almost essential) to make as many modifications as memory will permit in a single pass through the database. To ensure this, [Xapian](#) batches up modifications.

Flush may be called at any time to ensure that the modifications which have been made are written to disk: if the flush succeeds, all the preceding modifications will have been written to disk.

If any of the modifications fail, an exception will be thrown and the database will be left in a state in which each separate addition, replacement or deletion operation has either been fully performed or not performed at all: it is then up to the application to work out which operations need to be repeated.

It's not valid to call [flush\(\)](#) within a transaction.

Beware of calling [flush\(\)](#) too frequently: this will make indexing take much longer.

Note that [flush\(\)](#) need not be called explicitly: it will be called automatically when the database is closed, or when a sufficient number of modifications have been made. By default, this is every 10000 documents added, deleted, or modified. This value is rather conservative, and if you have a machine with plenty of memory, you can improve indexing throughput dramatically by setting `XAPIAN_FLUSH_THRESHOLD` in the environment to a larger value.

Exceptions:

[Xapian::DatabaseError](#) will be thrown if a problem occurs while modifying the database.

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

7.56.3.3 `void Xapian::WritableDatabase::begin_transaction (bool flushed = true)`

Begin a transaction.

In [Xapian](#) a transaction is a group of modifications to the database which are linked such that either all will be applied simultaneously or none will be applied at all. Even in the case of a power failure, this characteristic should be preserved (as long as the filesystem isn't corrupted, etc).

A transaction is started with [begin_transaction\(\)](#) and can either be committed by calling [commit_transaction\(\)](#) or aborted by calling [cancel_transaction\(\)](#).

By default, a transaction implicitly calls [flush\(\)](#) before and after so that the modifications stand and fall without affecting modifications before or after.

The downside of these implicit calls to [flush\(\)](#) is that small transactions can harm indexing performance in the same way that explicitly calling [flush\(\)](#) frequently can.

If you're applying atomic groups of changes and only wish to ensure that each group is either applied or not applied, then you can prevent the automatic flush before and after the transaction by starting the transaction with [begin_transaction\(false\)](#). However, if [cancel_transaction](#) is called (or if [commit_transaction](#) isn't called before the [WritableDatabase](#) object is destroyed) then any changes which were pending before the transaction began will also be discarded.

Transactions aren't currently supported by the [InMemory](#) backend.

Exceptions:

[*Xapian::UnimplementedError*](#) will be thrown if transactions are not available for this database type.

[*Xapian::InvalidOperationError*](#) will be thrown if this is called at an invalid time, such as when a transaction is already in progress.

7.56.3.4 void Xapian::WritableDatabase::commit_transaction ()

Complete the transaction currently in progress.

If this method completes successfully and this is a flushed transaction, all the database modifications made during the transaction will have been committed to the database.

If an error occurs, an exception will be thrown, and none of the modifications made to the database during the transaction will have been applied to the database.

In all cases the transaction will no longer be in progress.

Exceptions:

[*Xapian::DatabaseError*](#) will be thrown if a problem occurs while modifying the database.

[*Xapian::DatabaseCorruptError*](#) will be thrown if the database is in a corrupt state.

[*Xapian::InvalidOperationError*](#) will be thrown if a transaction is not currently in progress.

[*Xapian::UnimplementedError*](#) will be thrown if transactions are not available for this database type.

7.56.3.5 void Xapian::WritableDatabase::cancel_transaction ()

Abort the transaction currently in progress, discarding the pending modifications made to the database.

If an error occurs in this method, an exception will be thrown, but the transaction will be cancelled anyway.

Exceptions:

Xapian::DatabaseError will be thrown if a problem occurs while modifying the database.

Xapian::DatabaseCorruptError will be thrown if the database is in a corrupt state.

Xapian::InvalidOperationError will be thrown if a transaction is not currently in progress.

Xapian::UnimplementedError will be thrown if transactions are not available for this database type.

7.56.3.6 Xapian::docid Xapian::WritableDatabase::add_document (const Xapian::Document & document)

Add a new document to the database.

This method adds the specified document to the database, returning a newly allocated document ID. Automatically allocated document IDs come from a per-database monotonically increasing counter, so IDs from deleted documents won't be reused.

If you want to specify the document ID to be used, you should call [replace_document\(\)](#) instead.

Note that changes to the database won't be immediately committed to disk; see [flush\(\)](#) for more details.

As with all database modification operations, the effect is atomic: the document will either be fully added, or the document fails to be added and an exception is thrown (possibly at a later time when [flush\(\)](#) is called or the database is closed).

Parameters:

document The new document to be added.

Returns:

The document ID of the newly added document.

Exceptions:

Xapian::DatabaseError will be thrown if a problem occurs while writing to the database.

Xapian::DatabaseCorruptError will be thrown if the database is in a corrupt state.

7.56.3.7 void Xapian::WritableDatabase::delete_document (Xapian::docid *did*)

Delete a document from the database.

This method removes the document with the specified document ID from the database.

Note that changes to the database won't be immediately committed to disk; see [flush\(\)](#) for more details.

As with all database modification operations, the effect is atomic: the document will either be fully removed, or the document fails to be removed and an exception is thrown (possibly at a later time when [flush\(\)](#) is called or the database is closed).

Parameters:

did The document ID of the document to be removed.

Exceptions:

[Xapian::DatabaseError](#) will be thrown if a problem occurs while writing to the database.

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

7.56.3.8 void Xapian::WritableDatabase::delete_document (const std::string & *unique_term*)

Delete any documents indexed by a term from the database.

This method removes any documents indexed by the specified term from the database.

A major use is for convenience when UUIDs from another system are mapped to terms in [Xapian](#), although this method has other uses (for example, you could add a "deletion date" term to documents at index time and use this method to delete all documents due for deletion on a particular date).

Parameters:

unique_term The term to remove references to.

Exceptions:

[Xapian::DatabaseError](#) will be thrown if a problem occurs while writing to the database.

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

7.56.3.9 void Xapian::WritableDatabase::replace_document (Xapian::docid *did*, const Xapian::Document & *document*)

Replace a given document in the database.

This method replaces the document with the specified document ID. If document ID *did* isn't currently used, the document will be added with document ID *did*.

The monotonic counter used for automatically allocating document IDs is increased so that the next automatically allocated document ID will be *did* + 1. Be aware that if you use this method to specify a high document ID for a new document, and also use [WritableDatabase::add_document\(\)](#), [Xapian](#) may get to a state where this counter wraps around and will be unable to automatically allocate document IDs!

Note that changes to the database won't be immediately committed to disk; see [flush\(\)](#) for more details.

As with all database modification operations, the effect is atomic: the document will either be fully replaced, or the document fails to be replaced and an exception is thrown (possibly at a later time when [flush\(\)](#) is called or the database is closed).

Parameters:

did The document ID of the document to be replaced.

document The new document.

Exceptions:

[Xapian::DatabaseError](#) will be thrown if a problem occurs while writing to the database.

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

7.56.3.10 [Xapian::docid](#) [Xapian::WritableDatabase::replace_document](#) (const std::string & *unique_term*, const [Xapian::Document](#) & *document*)

Replace any documents matching a term.

This method replaces any documents indexed by the specified term with the specified document. If any documents are indexed by the term, the lowest document ID will be used for the document, otherwise a new document ID will be generated as for [add_document](#).

One common use is to allow UIDs from another system to easily be mapped to terms in [Xapian](#). Note that this method doesn't automatically add *unique_term* as a term, so you'll need to call [document.add_term\(unique_term\)](#) first when using [replace_document\(\)](#) in this way.

Another possible use is to allow groups of documents to be marked for later deletion - for example, you could add a "deletion date" term to documents at index time and use this method to easily and efficiently delete all documents due for deletion on a particular date.

Note that changes to the database won't be immediately committed to disk; see [flush\(\)](#) for more details.

As with all database modification operations, the effect is atomic: the document(s) will either be fully replaced, or the document(s) fail to be replaced and an exception is thrown (possibly at a later time when [flush\(\)](#) is called or the database is closed).

Parameters:

unique_term The "unique" term.

document The new document.

Returns:

The document ID that document was given.

Exceptions:

Xapian::DatabaseError will be thrown if a problem occurs while writing to the database.

Xapian::DatabaseCorruptError will be thrown if the database is in a corrupt state.

7.56.3.11 void Xapian::WritableDatabase::add_spelling (const std::string &word, Xapian::termcount freqinc = 1) const

Add a word to the spelling dictionary.

If the word is already present, its frequency is increased.

Parameters:

word The word to add.

freqinc How much to increase its frequency by (default 1).

7.56.3.12 void Xapian::WritableDatabase::remove_spelling (const std::string &word, Xapian::termcount freqdec = 1) const

Remove a word from the spelling dictionary.

The word's frequency is decreased, and if would become zero or less then the word is removed completely.

Parameters:

word The word to remove.

freqdec How much to decrease its frequency by (default 1).

7.56.3.13 void Xapian::WritableDatabase::add_synonym (const std::string &term, const std::string &synonym) const

Add a synonym for a term.

If *synonym* is already a synonym for *term*, then no action is taken.

7.56.3.14 void Xapian::WritableDatabase::remove_synonym (const std::string & *term*, const std::string & *synonym*) const

Remove a synonym for a term.

If *synonym* isn't a synonym for *term*, then no action is taken.

7.56.3.15 void Xapian::WritableDatabase::clear_synonyms (const std::string & *term*) const

Remove all synonyms for a term.

If *term* has no synonyms, no action is taken.

7.56.3.16 void Xapian::WritableDatabase::set_metadata (const std::string & *key*, const std::string & *value*)

Set the user-specified metadata associated with a given key.

This method sets the metadata value associated with a given key. If there is already a metadata value stored in the database with the same key, the old value is replaced. If you want to delete an existing item of metadata, just set its value to the empty string.

User-specified metadata allows you to store arbitrary information in the form of (key,tag) pairs.

There's no hard limit on the number of metadata items, or the size of the metadata values. Metadata keys have a limited length, which depends on the backend. We recommend limiting them to 200 bytes. Empty keys are not valid, and specifying one will cause an exception.

Metadata modifications are committed to disk in the same way as modifications to the documents in the database are: i.e., modifications are atomic, and won't be committed to disk immediately (see [flush\(\)](#) for more details). This allows metadata to be used to link databases with versioned external resources by storing the appropriate version number in a metadata item.

You can also use the metadata to store arbitrary extra information associated with terms, documents, or postings by encoding the termname and/or document id into the metadata key.

Parameters:

key The key of the metadata item to set.

value The value of the metadata item to set.

Exceptions:

[Xapian::DatabaseError](#) will be thrown if a problem occurs while writing to the database.

[Xapian::DatabaseCorruptError](#) will be thrown if the database is in a corrupt state.

Xapian::InvalidArgumentError will be thrown if the key supplied is empty.

Xapian::UnimplementedError will be thrown if the database backend in use doesn't support user-specified metadata.

7.56.3.17 `std::string Xapian::WritableDatabase::get_description () const` [virtual]

Return a string describing this object.

Reimplemented from [Xapian::Database](#).

The documentation for this class was generated from the following file:

- [xapian/database.h](#)

Chapter 8

xapian-core File Documentation

8.1 xapian/error.h File Reference

Hierarchy of classes which [Xapian](#) can throw as exceptions.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Error](#)
All exceptions thrown by [Xapian](#) are subclasses of [Xapian::Error](#).
- class [Xapian::LogicError](#)
The base class for exceptions indicating errors in the program logic.
- class [Xapian::RuntimeError](#)
The base class for exceptions indicating errors only detectable at runtime.
- class [Xapian::AssertionError](#)
[AssertionError](#) is thrown if a logical assertion inside [Xapian](#) fails.
- class [Xapian::InvalidArgumentError](#)
[InvalidArgumentError](#) indicates an invalid parameter value was passed to the API.
- class [Xapian::InvalidOperationError](#)
[InvalidOperationError](#) indicates the API was used in an invalid way.
- class [Xapian::UnimplementedError](#)
[UnimplementedError](#) indicates an attempt to use an unimplemented feature.

- class [Xapian::DatabaseError](#)
DatabaseError indicates some sort of database related error.
- class [Xapian::DatabaseCorruptError](#)
DatabaseCorruptError indicates database corruption was detected.
- class [Xapian::DatabaseCreateError](#)
DatabaseCreateError indicates a failure to create a database.
- class [Xapian::DatabaseLockError](#)
DatabaseLockError indicates failure to lock a database.
- class [Xapian::DatabaseModifiedError](#)
DatabaseModifiedError indicates a database was modified.
- class [Xapian::DatabaseOpeningError](#)
DatabaseOpeningError indicates failure to open a database.
- class [Xapian::DatabaseVersionError](#)
DatabaseVersionError indicates that a database is in an unsupported format.
- class [Xapian::DocNotFoundError](#)
Indicates an attempt to access a document not present in the database.
- class [Xapian::FeatureUnavailableError](#)
Indicates an attempt to use a feature which is unavailable.
- class [Xapian::InternalError](#)
InternalError indicates a runtime problem of some sort.
- class [Xapian::NetworkError](#)
Indicates a problem communicating with a remote database.
- class [Xapian::NetworkTimeoutError](#)
Indicates a timeout expired while communicating with a remote database.
- class [Xapian::QueryParserError](#)
Indicates a query string can't be parsed.
- class [Xapian::RangeError](#)
RangeError indicates an attempt to access outside the bounds of a container.

8.1.1 Detailed Description

Hierarchy of classes which [Xapian](#) can throw as exceptions.

8.2 xapian/version.h File Reference

Define preprocessor symbols for the library version.

Defines

- `#define XAPIAN_VERSION "1.0.22"`
The version of [Xapian](#) as a C string literal.
- `#define XAPIAN_MAJOR_VERSION 1`
The major component of the [Xapian](#) version.
- `#define XAPIAN_MINOR_VERSION 0`
The minor component of the [Xapian](#) version.
- `#define XAPIAN_REVISION 22`
The revision component of the [Xapian](#) version.
- `#define XAPIAN_HAS_FLINT_BACKEND 1`
XAPIAN_HAS_FLINT_BACKEND Defined if the flint backend is enabled.
- `#define XAPIAN_HAS_QUARTZ_BACKEND 1`
XAPIAN_HAS_QUARTZ_BACKEND Defined if the quartz backend is enabled.
- `#define XAPIAN_HAS_INMEMORY_BACKEND 1`
XAPIAN_HAS_INMEMORY_BACKEND Defined if the inmemory backend is enabled.
- `#define XAPIAN_HAS_REMOTE_BACKEND 1`
XAPIAN_HAS_REMOTE_BACKEND Defined if the remote backend is enabled.

8.2.1 Detailed Description

Define preprocessor symbols for the library version.

8.2.2 Define Documentation

8.2.2.1 `#define XAPIAN_HAS_FLINT_BACKEND 1`

XAPIAN_HAS_FLINT_BACKEND Defined if the flint backend is enabled.

8.2.2.2 `#define XAPIAN_HAS_INMEMORY_BACKEND 1`

XAPIAN_HAS_INMEMORY_BACKEND Defined if the inmemory backend is enabled.

8.2.2.3 #define XAPIAN_HAS_QUARTZ_BACKEND 1

XAPIAN_HAS_QUARTZ_BACKEND Defined if the quartz backend is enabled.

8.2.2.4 #define XAPIAN_HAS_REMOTE_BACKEND 1

XAPIAN_HAS_REMOTE_BACKEND Defined if the remote backend is enabled.

8.2.2.5 #define XAPIAN_MAJOR_VERSION 1

The major component of the [Xapian](#) version.

E.g. for [Xapian](#) 1.0.14 this would be: 1

8.2.2.6 #define XAPIAN_MINOR_VERSION 0

The minor component of the [Xapian](#) version.

E.g. for [Xapian](#) 1.0.14 this would be: 0

8.2.2.7 #define XAPIAN_REVISION 22

The revision component of the [Xapian](#) version.

E.g. for [Xapian](#) 1.0.14 this would be: 14

8.2.2.8 #define XAPIAN_VERSION "1.0.22"

The version of [Xapian](#) as a C string literal.

8.3 xapian.h File Reference

Public interfaces for the [Xapian](#) library.

Namespaces

- namespace [Xapian](#)

Functions

- `const char * Xapian::version_string ()`
Report the version string of the library which the program is linked with.
- `const char * Xapian::xapian_version_string ()`
For compatibility with [Xapian](#) 0.9.5 and earlier.
- `int Xapian::major_version ()`
Report the major version of the library which the program is linked with.
- `int Xapian::xapian_major_version ()`
For compatibility with [Xapian](#) 0.9.5 and earlier.
- `int Xapian::minor_version ()`
Report the minor version of the library which the program is linked with.
- `int Xapian::xapian_minor_version ()`
For compatibility with [Xapian](#) 0.9.5 and earlier.
- `int Xapian::revision ()`
Report the revision of the library which the program is linked with.
- `int Xapian::xapian_revision ()`
For compatibility with [Xapian](#) 0.9.5 and earlier.

8.3.1 Detailed Description

Public interfaces for the [Xapian](#) library.

8.4 xapian/database.h File Reference

API for working with [Xapian](#) databases.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Database](#)
This class is used to access a database, or a group of databases.
- class [Xapian::WritableDatabase](#)
This class provides read/write access to a database.

Variables

- const int [Xapian::DB_CREATE_OR_OPEN](#) = 1
Open for read/write; create if no db exists.
- const int [Xapian::DB_CREATE](#) = 2
Create a new database; fail if db exists.
- const int [Xapian::DB_CREATE_OR_OVERWRITE](#) = 3
Overwrite existing db; create if none exists.
- const int [Xapian::DB_OPEN](#) = 4
Open for read/write; fail if no db exists.

8.4.1 Detailed Description

API for working with [Xapian](#) databases.

8.5 xapian/dbfactory.h File Reference

Factory functions for constructing Database and WritableDatabase objects.

Namespaces

- namespace [Xapian](#)
- namespace [Xapian::Auto](#)
- namespace [Xapian::InMemory](#)
- namespace [Xapian::Quartz](#)
- namespace [Xapian::Flint](#)
- namespace [Xapian::Remote](#)

Functions

- Database [Xapian::Auto::open_stub](#) (const std::string &file)
Construct a [Database](#) object for a stub database file.
- WritableDatabase [Xapian::InMemory::open](#) ()
Construct a [WritableDatabase](#) object for a new, empty [InMemory](#) database.
- Database [Xapian::Quartz::open](#) (const std::string &dir)
Construct a [Database](#) object for read-only access to a [Quartz](#) database.
- [Xapian::Quartz::WritableDatabaseopen](#) (const std::string &dir, int action, int block_size=8192)
Construct a [Database](#) object for update access to a [Quartz](#) database.
- Database [Xapian::Flint::open](#) (const std::string &dir)
Construct a [Database](#) object for read-only access to a [Flint](#) database.
- WritableDatabase [Xapian::Flint::open](#) (const std::string &dir, int action, int block_size=8192)
Construct a [Database](#) object for update access to a [Flint](#) database.
- Database [Xapian::Remote::open](#) (const std::string &host, unsigned int port, [Xapian::timeout](#) timeout=10000, [Xapian::timeout](#) connect_timeout=10000)
Construct a [Database](#) object for read-only access to a remote database accessed via a TCP connection.
- WritableDatabase [Xapian::Remote::open_writable](#) (const std::string &host, unsigned int port, [Xapian::timeout](#) timeout=0, [Xapian::timeout](#) connect_timeout=10000)
Construct a [WritableDatabase](#) object for update access to a remote database accessed via a TCP connection.

- Database [Xapian::Remote::open](#) (const std::string &program, const std::string &args, [Xapian::timeout](#) timeout=10000)
Construct a [Database](#) object for read-only access to a remote database accessed via a program.
- WritableDatabase [Xapian::Remote::open_writable](#) (const std::string &program, const std::string &args, [Xapian::timeout](#) timeout=0)
Construct a [WritableDatabase](#) object for update access to a remote database accessed via a program.

8.5.1 Detailed Description

Factory functions for constructing Database and WritableDatabase objects.

8.6 xapian/document.h File Reference

API for working with documents.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Document](#)
A handle representing a document in a [Xapian](#) database.

8.6.1 Detailed Description

API for working with documents.

8.7 xapian/enquire.h File Reference

API for running queries.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::MSet](#)
A match set ([MSet](#)).
- class [Xapian::MSetIterator](#)
An iterator pointing to items in an [MSet](#).
- class [Xapian::ESet](#)
Class representing an ordered set of expand terms (an [ESet](#)).
- class [Xapian::ESetIterator](#)
Iterate through terms in the [ESet](#).
- class [Xapian::RSet](#)
A relevance set ([R-Set](#)).
- class [Xapian::MatchDecider](#)
Base class for matcher decision functor.
- class [Xapian::Enquire](#)
This class provides an interface to the information retrieval system for the purpose of searching.
- class [Xapian::Weight](#)
Abstract base class for weighting schemes.
- class [Xapian::BoolWeight](#)
Boolean weighting scheme (everything gets 0).
- class [Xapian::BM25Weight](#)
BM25 weighting scheme.
- class [Xapian::TradWeight](#)
Traditional probabilistic weighting scheme.

Functions

- bool [Xapian::operator==](#) (const MSetIterator &a, const MSetIterator &b)
Equality test for [MSetIterator](#) objects.
- bool [Xapian::operator!=](#) (const MSetIterator &a, const MSetIterator &b)
Inequality test for [MSetIterator](#) objects.
- bool [Xapian::operator==](#) (const ESetIterator &a, const ESetIterator &b)
Equality test for [ESetIterator](#) objects.
- bool [Xapian::operator!=](#) (const ESetIterator &a, const ESetIterator &b)
Inequality test for [ESetIterator](#) objects.

8.7.1 Detailed Description

API for running queries.

8.8 xapian/errorhandler.h File Reference

Decide if a [Xapian::Error](#) exception should be ignored.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::ErrorHandler](#)
Decide if a [Xapian::Error](#) exception should be ignored.

8.8.1 Detailed Description

Decide if a [Xapian::Error](#) exception should be ignored.

8.9 xapian/expanddecider.h File Reference

Allow rejection of terms during ESet generation.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::ExpandDecider](#)
Virtual base class for expand decider functor.
- class [Xapian::ExpandDeciderAnd](#)
[ExpandDecider](#) subclass which rejects terms using two [ExpandDeciders](#).
- class [Xapian::ExpandDeciderFilterTerms](#)
[ExpandDecider](#) subclass which rejects terms in a specified list.

8.9.1 Detailed Description

Allow rejection of terms during ESet generation.

8.10 xapian/positioniterator.h File Reference

Classes for iterating through position lists.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::PositionIterator](#)
An iterator pointing to items in a list of positions.

Functions

- bool [Xapian::operator==](#) (const PositionIterator &a, const PositionIterator &b)
Test equality of two PositionIterators.
- bool [Xapian::operator!=](#) (const PositionIterator &a, const PositionIterator &b)
Test inequality of two PositionIterators.

8.10.1 Detailed Description

Classes for iterating through position lists.

8.11 xapian/postingiterator.h File Reference

Classes for iterating through posting lists.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::PostingIterator](#)
An iterator pointing to items in a list of postings.

Functions

- bool [Xapian::operator==](#) (const PostingIterator &a, const PostingIterator &b)
Test equality of two PostingIterators.
- bool [Xapian::operator!=](#) (const PostingIterator &a, const PostingIterator &b)
Test inequality of two PostingIterators.

8.11.1 Detailed Description

Classes for iterating through posting lists.

8.12 xapian/query.h File Reference

Classes for representing a query.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Query](#)
Class representing a query.

8.12.1 Detailed Description

Classes for representing a query.

8.13 xapian/queryparser.h File Reference

parsing a user query string to build a [Xapian::Query](#) object

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Stopper](#)
Base class for stop-word decision functor.
- class [Xapian::SimpleStopper](#)
Simple implementation of [Stopper](#) class - this will suit most users.
- struct [Xapian::ValueRangeProcessor](#)
Base class for value range processors.
- class [Xapian::StringValueRangeProcessor](#)
Handle a string range.
- class [Xapian::DateValueRangeProcessor](#)
Handle a date range.
- class [Xapian::NumberValueRangeProcessor](#)
Handle a number range.
- class [Xapian::QueryParser](#)
Build a [Xapian::Query](#) object from a user query string.

Functions

- `std::string Xapian::sortable_serialise (double value)`
Convert a floating point number to a string, preserving sort order.
- `double Xapian::sortable_unserialise (const std::string &value)`
Convert a string encoded using [sortable_serialise](#) back to a floating point number.

8.13.1 Detailed Description

parsing a user query string to build a [Xapian::Query](#) object

8.14 xapian/sorter.h File Reference

Build sort keys for MSet ordering.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Sorter](#)
Virtual base class for sorter functor.
- class [Xapian::MultiValueSorter](#)
[Sorter](#) subclass which sorts by a several values.

8.14.1 Detailed Description

Build sort keys for MSet ordering.

8.15 xapian/stem.h File Reference

stemming algorithms

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::Stem](#)
Class representing a stemming algorithm.

8.15.1 Detailed Description

stemming algorithms

8.16 xapian/termgenerator.h File Reference

parse free text and generate terms

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::TermGenerator](#)
Parses a piece of text and generate terms.

8.16.1 Detailed Description

parse free text and generate terms

8.17 xapian/termiterator.h File Reference

Classes for iterating through term lists.

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::TermIterator](#)
An iterator pointing to items in a list of terms.

Functions

- bool [Xapian::operator==](#) (const TermIterator &a, const TermIterator &b)
Equality test for [TermIterator](#) objects.
- bool [Xapian::operator!=](#) (const TermIterator &a, const TermIterator &b)
Inequality test for [TermIterator](#) objects.

8.17.1 Detailed Description

Classes for iterating through term lists.

8.18 xapian/types.h File Reference

typedefs for [Xapian](#)

Namespaces

- namespace [Xapian](#)

Typedefs

- typedef unsigned [Xapian::doccount](#)
A count of documents.
- typedef int [Xapian::doccount_diff](#)
A signed difference between two counts of documents.
- typedef unsigned [Xapian::docid](#)
A unique identifier for a document.
- typedef double [Xapian::doclength](#)
A normalised document length.
- typedef int [Xapian::percent](#)
The percentage score for a document in an [MSet](#).
- typedef unsigned [Xapian::termcount](#)
A counts of terms.
- typedef int [Xapian::termcount_diff](#)
A signed difference between two counts of terms.
- typedef unsigned [Xapian::termpos](#)
A term position within a document or query.
- typedef int [Xapian::termpos_diff](#)
A signed difference between two term positions.
- typedef unsigned [Xapian::timeout](#)
A timeout value in milliseconds.
- typedef unsigned [Xapian::valueno](#)
The number for a value slot in a document.
- typedef int [Xapian::valueno_diff](#)
A signed difference between two value slot numbers.

- typedef double [Xapian::weight](#)
The weight of a document or term.

Variables

- const valueno [Xapian::BAD_VALUENO](#) = static_cast<valueno>(-1)
Reserved value to indicate "no valueno".

8.18.1 Detailed Description

typedefs for [Xapian](#)

8.19 xapian/unicode.h File Reference

Unicode and UTF-8 related classes and functions.

Namespaces

- namespace [Xapian](#)
- namespace [Xapian::Unicode](#)
- namespace **Xapian::Unicode::Internal**

Classes

- class [Xapian::Utf8Iterator](#)
An iterator which returns [Unicode](#) character values from a UTF-8 encoded string.

Enumerations

- enum [Xapian::Unicode::category](#) {
UNASSIGNED, UPPERCASE_LETTER, LOWERCASE_LETTER,
TITLECASE_LETTER,
MODIFIER_LETTER, OTHER_LETTER, NON_SPACING_MARK,
ENCLOSING_MARK,
COMBINING_SPACING_MARK, DECIMAL_DIGIT_NUMBER,
LETTER_NUMBER, OTHER_NUMBER,
SPACE_SEPARATOR, LINE_SEPARATOR, PARAGRAPH_
SEPARATOR, CONTROL,
FORMAT, PRIVATE_USE, SURROGATE, CONNECTOR_
PUNCTUATION,
DASH_PUNCTUATION, OPEN_PUNCTUATION, CLOSE_
PUNCTUATION, INITIAL_QUOTE_PUNCTUATION,
FINAL_QUOTE_PUNCTUATION, OTHER_PUNCTUATION, MATH_
SYMBOL, CURRENCY_SYMBOL,
MODIFIER_SYMBOL, OTHER_SYMBOL }

Each Unicode character is in exactly one of these categories.

Functions

- int **Xapian::Unicode::Internal::get_character_info** (unsigned ch)
- int **Xapian::Unicode::Internal::get_case_type** (int info)
- category **Xapian::Unicode::Internal::get_category** (int info)
- int **Xapian::Unicode::Internal::get_delta** (int info)

- unsigned [Xapian::Unicode::nonascii_to_utf8](#) (unsigned ch, char *buf)
Convert a single non-ASCII [Unicode](#) character to UTF-8.
- unsigned [Xapian::Unicode::to_utf8](#) (unsigned ch, char *buf)
Convert a single [Unicode](#) character to UTF-8.
- void [Xapian::Unicode::append_utf8](#) (std::string &s, unsigned ch)
Append the UTF-8 representation of a single [Unicode](#) character to a std::string.
- category [Xapian::Unicode::get_category](#) (unsigned ch)
Return the category which a given [Unicode](#) character falls into.
- bool [Xapian::Unicode::is_wordchar](#) (unsigned ch)
Test if a given [Unicode](#) character is "word character".
- bool [Xapian::Unicode::is_whitespace](#) (unsigned ch)
Test if a given [Unicode](#) character is a whitespace character.
- bool [Xapian::Unicode::is_currency](#) (unsigned ch)
Test if a given [Unicode](#) character is a currency symbol.
- unsigned [Xapian::Unicode::tolower](#) (unsigned ch)
Convert a [Unicode](#) character to lowercase.
- unsigned [Xapian::Unicode::toupper](#) (unsigned ch)
Convert a [Unicode](#) character to uppercase.
- std::string [Xapian::Unicode::tolower](#) (const std::string &term)
Convert a UTF-8 std::string to lowercase.
- std::string [Xapian::Unicode::toupper](#) (const std::string &term)
Convert a UTF-8 std::string to uppercase.

8.19.1 Detailed Description

Unicode and UTF-8 related classes and functions.

8.20 xapian/valueiterator.h File Reference

classes for iterating through values

Namespaces

- namespace [Xapian](#)

Classes

- class [Xapian::ValueIterator](#)
An iterator pointing to values associated with a document.

Functions

- bool [Xapian::operator==](#) (const ValueIterator &a, const ValueIterator &b)
Equality test for [ValueIterator](#) objects.
- bool [Xapian::operator!=](#) (const ValueIterator &a, const ValueIterator &b)
Inequality test for [ValueIterator](#) objects.

8.20.1 Detailed Description

classes for iterating through values

Chapter 9

xapian-core Page Documentation

9.1 Deprecated List

Member [Xapian::Enquire::register_match_decider](#)(const std::string &name, const MatchDecider *mdecider=NULL)

This method is deprecated. It was added long ago with the intention that it would allow the remote backend to support use of MatchDecider objects, but there's a better approach.

Member [Xapian::Error::get_errno](#)() const This method is deprecated, because errno values aren't portable between platforms, so we can't serialise them when passing exceptions from a remote server to a client. Use the [get_error_string](#)() method instead.

Member [Xapian::Query::Query](#)(Query::op op_, [Xapian::Query](#) q) This method is deprecated because it isn't useful, since none of the current query operators can be usefully applied to a single subquery without a parameter value.

Member [Xapian::xapian_major_version](#)() This function is now deprecated, use [Xapian::major_version](#)() instead.

Member [Xapian::xapian_minor_version](#)() This function is now deprecated, use [Xapian::minor_version](#)() instead.

Member [Xapian::xapian_revision](#)() This function is now deprecated, use [Xapian::revision](#)() instead.

Member [Xapian::xapian_version_string](#)() This function is now deprecated, use [Xapian::version_string](#)() instead.

Index

- ~Database
 - Xapian::Database, [51](#)
- ~Document
 - Xapian::Document, [77](#)
- ~ESet
 - Xapian::ESet, [99](#)
- ~Enquire
 - Xapian::Enquire, [84](#)
- ~ErrorHandler
 - Xapian::ErrorHandler, [96](#)
- ~ExpandDecider
 - Xapian::ExpandDecider, [105](#)
- ~MSet
 - Xapian::MSet, [120](#)
- ~MatchDecider
 - Xapian::MatchDecider, [116](#)
- ~PositionIterator
 - Xapian::PositionIterator, [138](#)
- ~PostingIterator
 - Xapian::PostingIterator, [141](#)
- ~Query
 - Xapian::Query, [146](#)
- ~QueryParser
 - Xapian::QueryParser, [152](#)
- ~RSet
 - Xapian::RSet, [160](#)
- ~SimpleStopper
 - Xapian::SimpleStopper, [164](#)
- ~Sorter
 - Xapian::Sorter, [165](#)
- ~Stem
 - Xapian::Stem, [167](#)
- ~Stopper
 - Xapian::Stopper, [169](#)
- ~TermGenerator
 - Xapian::TermGenerator, [175](#)
- ~TermIterator
 - Xapian::TermIterator, [180](#)
- ~ValueRangeProcessor
 - Xapian::ValueRangeProcessor, [196](#)
- ~WritableDatabase
 - Xapian::WritableDatabase, [203](#)
- add
 - Xapian::SimpleStopper, [164](#)
- add_boolean_prefix
 - Xapian::QueryParser, [155](#)
- add_boolean_term
 - Xapian::Document, [78](#)
- add_database
 - Xapian::Database, [51](#)
- add_document
 - Xapian::RSet, [160](#)
 - Xapian::WritableDatabase, [206](#)
- add_posting
 - Xapian::Document, [78](#)
- add_prefix
 - Xapian::QueryParser, [154](#)
- add_spelling
 - Xapian::WritableDatabase, [209](#)
- add_synonym
 - Xapian::WritableDatabase, [209](#)
- add_term
 - Xapian::Document, [78](#)
- add_value
 - Xapian::Document, [77](#)
- add_valuerangeprocessor
 - Xapian::QueryParser, [156](#)
- allterms_begin
 - Xapian::Database, [53](#)
- allterms_end
 - Xapian::Database, [53](#)
- append_utf8
 - Xapian::Unicode, [37](#)
- AssertionError
 - Xapian::AssertionError, [40](#)
- assign
 - Xapian::Utf8Iterator, [190](#)
- back
 - Xapian::ESet, [100](#)
 - Xapian::MSet, [123](#)

- BAD_VALUENO
 - Xapian, [25](#)
- begin
 - Xapian::ESet, [100](#)
 - Xapian::MSet, [123](#)
- begin_transaction
 - Xapian::WritableDatabase, [204](#)
- BM25Weight
 - Xapian::BM25Weight, [42](#)
- cancel_transaction
 - Xapian::WritableDatabase, [205](#)
- category
 - Xapian::Unicode, [37](#)
- clear_synonyms
 - Xapian::WritableDatabase, [210](#)
- clear_terms
 - Xapian::Document, [79](#)
- clear_values
 - Xapian::Document, [77](#)
- clone
 - Xapian::BM25Weight, [42](#)
 - Xapian::BoolWeight, [46](#)
 - Xapian::TradWeight, [183](#)
- commit_transaction
 - Xapian::WritableDatabase, [205](#)
- const_iterator
 - Xapian::MSet, [119](#)
- const_reference
 - Xapian::MSet, [120](#)
- contains
 - Xapian::RSet, [161](#)
- convert_to_percent
 - Xapian::MSet, [121](#)
- create
 - Xapian::Weight, [198](#)
- Database
 - Xapian::Database, [51](#)
- DatabaseCorruptError
 - Xapian::DatabaseCorruptError, [58](#)
- DatabaseCreateError
 - Xapian::DatabaseCreateError, [60](#)
- DatabaseError
 - Xapian::DatabaseError, [62](#)
- DatabaseLockError
 - Xapian::DatabaseLockError, [64](#)
- DatabaseModifiedError
 - Xapian::DatabaseModifiedError, [66](#)
- DatabaseOpeningError
 - Xapian::DatabaseOpeningError, [68](#)
- DatabaseVersionError
 - Xapian::DatabaseVersionError, [71](#)
- DateValueRangeProcessor
 - Xapian::DateValueRangeProcessor, [72](#)
- DB_CREATE
 - Xapian, [25](#)
- DB_CREATE_OR_OPEN
 - Xapian, [25](#)
- DB_CREATE_OR_OVERWRITE
 - Xapian, [25](#)
- DB_OPEN
 - Xapian, [25](#)
- delete_document
 - Xapian::WritableDatabase, [206](#), [207](#)
- difference_type
 - Xapian::ESetIterator, [102](#)
 - Xapian::MSet, [120](#)
 - Xapian::MSetIterator, [127](#)
 - Xapian::PostingIterator, [140](#)
 - Xapian::TermIterator, [179](#)
 - Xapian::Utf8Iterator, [188](#)
 - Xapian::ValueIterator, [193](#)
- doccount
 - Xapian, [20](#)
- doccount_diff
 - Xapian, [20](#)
- docid
 - Xapian, [20](#)
- doclength
 - Xapian, [21](#)
- DocNotFoundError
 - Xapian::DocNotFoundError, [74](#)
- Document
 - Xapian::Document, [77](#)
- empty
 - Xapian::ESet, [100](#)
 - Xapian::MSet, [123](#)
 - Xapian::Query, [148](#)
 - Xapian::RSet, [160](#)
- end
 - Xapian::ESet, [100](#)
 - Xapian::MSet, [123](#)
- Enquire
 - Xapian::Enquire, [84](#)
- ErrorHandler
 - Xapian::ErrorHandler, [96](#)
- ESet

- Xapian::ESet, 99
- ESetIterator
 - Xapian::ESetIterator, 103
- ExpandDeciderAnd
 - Xapian::ExpandDeciderAnd, 106
- ExpandDeciderFilterTerms
 - Xapian::ExpandDeciderFilterTerms, 108
- feature_flag
 - Xapian::QueryParser, 150
- FeatureUnavailableError
 - Xapian::FeatureUnavailableError, 110
- fetch
 - Xapian::MSet, 120, 121
- FLAG_AUTO_MULTIWORD_-SYNONYMS
 - Xapian::QueryParser, 151
- FLAG_AUTO_SYNONYMS
 - Xapian::QueryParser, 151
- FLAG_BOOLEAN
 - Xapian::QueryParser, 151
- FLAG_BOOLEAN_ANY_CASE
 - Xapian::QueryParser, 151
- FLAG_DEFAULT
 - Xapian::QueryParser, 151
- FLAG_LOVEHATE
 - Xapian::QueryParser, 151
- FLAG_PARTIAL
 - Xapian::QueryParser, 151
- FLAG_PHRASE
 - Xapian::QueryParser, 151
- FLAG_PURE_NOT
 - Xapian::QueryParser, 151
- FLAG_SPELLING
 - Xapian::TermGenerator, 174
- FLAG_SPELLING_CORRECTION
 - Xapian::QueryParser, 151
- FLAG_SYNONYM
 - Xapian::QueryParser, 151
- FLAG_WILDCARD
 - Xapian::QueryParser, 151
- flags
 - Xapian::TermGenerator, 174
- flush
 - Xapian::WritableDatabase, 204
- get_available_languages
 - Xapian::Stem, 168
- get_avlength
 - Xapian::Database, 54
- get_category
 - Xapian::Unicode, 37
- get_collapse_count
 - Xapian::MSetIterator, 128
- get_collapse_key
 - Xapian::MSetIterator, 128
- get_collection_freq
 - Xapian::Database, 54
- get_context
 - Xapian::Error, 95
- get_corrected_query_string
 - Xapian::QueryParser, 156
- get_data
 - Xapian::Document, 78
- get_default_op
 - Xapian::QueryParser, 153
- get_description
 - Xapian::Database, 52
 - Xapian::Document, 80
 - Xapian::Enquire, 92
 - Xapian::Error, 95
 - Xapian::ESet, 100
 - Xapian::ESetIterator, 103
 - Xapian::MSet, 124
 - Xapian::MSetIterator, 129
 - Xapian::PositionIterator, 138
 - Xapian::PostingIterator, 142
 - Xapian::Query, 148
 - Xapian::QueryParser, 156
 - Xapian::RSet, 161
 - Xapian::SimpleStopper, 164
 - Xapian::Stem, 168
 - Xapian::Stopper, 169
 - Xapian::TermGenerator, 177
 - Xapian::TermIterator, 181
 - Xapian::ValueIterator, 194
 - Xapian::WritableDatabase, 211
- get_doccount
 - Xapian::Database, 53
- get_docid
 - Xapian::Document, 80
- get_doclength
 - Xapian::Database, 54
 - Xapian::PostingIterator, 141
- get_document
 - Xapian::Database, 54
 - Xapian::MSetIterator, 128
 - Xapian::TermGenerator, 175

- get_ebound
 - Xapian::ESet, 99
- get_errno
 - Xapian::Error, 95
- get_error_string
 - Xapian::Error, 95
- get_eset
 - Xapian::Enquire, 90
- get_firstitem
 - Xapian::MSet, 122
- get_lastdocid
 - Xapian::Database, 53
- get_length
 - Xapian::Query, 147
- get_matches_estimated
 - Xapian::MSet, 122
- get_matches_lower_bound
 - Xapian::MSet, 122
- get_matches_upper_bound
 - Xapian::MSet, 122
- get_matching_terms_begin
 - Xapian::Enquire, 91
- get_matching_terms_end
 - Xapian::Enquire, 91, 92
- get_max_attained
 - Xapian::MSet, 123
- get_max_possible
 - Xapian::MSet, 123
- get_maxextra
 - Xapian::BM25Weight, 44
 - Xapian::BoolWeight, 47
 - Xapian::TradWeight, 185
 - Xapian::Weight, 200
- get_maxpart
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 46
 - Xapian::TradWeight, 184
 - Xapian::Weight, 199
- get_metadata
 - Xapian::Database, 56
- get_mset
 - Xapian::Enquire, 89
- get_msg
 - Xapian::Error, 94
- get_percent
 - Xapian::MSetIterator, 129
- get_query
 - Xapian::Enquire, 85
- get_rank
 - Xapian::MSetIterator, 128
- get_spelling_suggestion
 - Xapian::Database, 55
- get_sumextra
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 47
 - Xapian::TradWeight, 184
 - Xapian::Weight, 199
- get_sumpart
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 46
 - Xapian::TradWeight, 184
 - Xapian::Weight, 199
- get_sumpart_needs_doclength
 - Xapian::BM25Weight, 44
 - Xapian::BoolWeight, 47
 - Xapian::TradWeight, 185
 - Xapian::Weight, 200
- get_termfreq
 - Xapian::Database, 54
 - Xapian::MSet, 121
 - Xapian::TermIterator, 180
- get_termpos
 - Xapian::TermGenerator, 177
- get_terms_begin
 - Xapian::Query, 148
- get_terms_end
 - Xapian::Query, 148
- get_termweight
 - Xapian::MSet, 122
- get_type
 - Xapian::Error, 94
- get_value
 - Xapian::Document, 77
- get_valueno
 - Xapian::ValueIterator, 194
- get_wdf
 - Xapian::PostingIterator, 141
 - Xapian::TermIterator, 180
- get_weight
 - Xapian::ESetIterator, 103
 - Xapian::MSetIterator, 128
- has_positions
 - Xapian::Database, 52
- include_query_terms
 - Xapian::Enquire, 92
- increase_termpos
 - Xapian::TermGenerator, 177
- index_text

- Xapian::TermGenerator, 176
- index_text_without_positions
 - Xapian::TermGenerator, 176, 177
- InternalError
 - Xapian::InternalError, 112
- InvalidArgumentError
 - Xapian::InvalidArgumentError, 113
- InvalidOperationError
 - Xapian::InvalidOperationError, 114
- is_currency
 - Xapian::Unicode, 37
- is_whitespace
 - Xapian::Unicode, 37
- is_wordchar
 - Xapian::Unicode, 38
- iterator
 - Xapian::MSet, 119
- iterator_category
 - Xapian::ESetIterator, 102
 - Xapian::MSetIterator, 126
 - Xapian::PostingIterator, 140
 - Xapian::TermIterator, 179
 - Xapian::Utf8Iterator, 188
 - Xapian::ValueIterator, 193
- keep_alive
 - Xapian::Database, 54
- left
 - Xapian::Utf8Iterator, 190
- major_version
 - Xapian, 22
- MatchAll
 - Xapian::Query, 148
- MatchNothing
 - Xapian::Query, 148
- max_size
 - Xapian::ESet, 99
 - Xapian::MSet, 123
- metadata_keys_begin
 - Xapian::Database, 56
- metadata_keys_end
 - Xapian::Database, 57
- minor_version
 - Xapian, 22
- MSet
 - Xapian::MSet, 120
- MSetIterator
 - Xapian::MSetIterator, 127
- name
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 46
 - Xapian::TradWeight, 183
 - Xapian::Weight, 198
- NetworkError
 - Xapian::NetworkError, 131
- NetworkTimeoutError
 - Xapian::NetworkTimeoutError, 133
- nonascii_to_utf8
 - Xapian::Unicode, 38
- NumberValueRangeProcessor
 - Xapian::NumberValueRangeProcessor, 135
- op
 - Xapian::Query, 145
- OP_AND
 - Xapian::Query, 145
- OP_AND_MAYBE
 - Xapian::Query, 145
- OP_AND_NOT
 - Xapian::Query, 145
- OP_ELITE_SET
 - Xapian::Query, 145
- OP_FILTER
 - Xapian::Query, 145
- OP_NEAR
 - Xapian::Query, 145
- OP_OR
 - Xapian::Query, 145
- OP_PHRASE
 - Xapian::Query, 145
- OP_SCALE_WEIGHT
 - Xapian::Query, 145
- OP_VALUE_GE
 - Xapian::Query, 145
- OP_VALUE_LE
 - Xapian::Query, 145
- OP_VALUE_RANGE
 - Xapian::Query, 145
- OP_XOR
 - Xapian::Query, 145
- open
 - Xapian::Flint, 28
 - Xapian::InMemory, 30
 - Xapian::Quartz, 31
 - Xapian::Remote, 33, 34
- open_stub
 - Xapian::Auto, 27

- open_writable
 - Xapian::Remote, 34
- operator *
 - Xapian::ESetIterator, 103
 - Xapian::MSetIterator, 128
 - Xapian::PostingIterator, 141
 - Xapian::TermIterator, 180
 - Xapian::Utf8Iterator, 190
 - Xapian::ValueIterator, 194
- operator!=
 - Xapian, 22, 23
 - Xapian::ESetIterator, 104
 - Xapian::MSetIterator, 129
 - Xapian::Utf8Iterator, 191
 - Xapian::ValueIterator, 195
- operator()
 - Xapian::DateValueRangeProcessor, 73
 - Xapian::ErrorHandler, 96
 - Xapian::ExpandDecider, 105
 - Xapian::ExpandDeciderAnd, 107
 - Xapian::ExpandDeciderFilterTerms, 108
 - Xapian::MatchDecider, 116
 - Xapian::MultiValueSorter, 130
 - Xapian::NumberValueRangeProcessor, 136
 - Xapian::SimpleStopper, 164
 - Xapian::Sorter, 165
 - Xapian::Stem, 168
 - Xapian::Stopper, 169
 - Xapian::StringValueRangeProcessor, 171
 - Xapian::ValueRangeProcessor, 196
- operator++
 - Xapian::ESetIterator, 103
 - Xapian::MSetIterator, 127
 - Xapian::Utf8Iterator, 190
 - Xapian::ValueIterator, 194
- operator-
 - Xapian::ESetIterator, 103
 - Xapian::MSetIterator, 127, 128
- operator->
 - Xapian::ValueIterator, 194
- operator=
 - Xapian::Database, 51
 - Xapian::Document, 77
 - Xapian::Enquire, 84
 - Xapian::ESet, 99
 - Xapian::ESetIterator, 103
 - Xapian::MSet, 120
 - Xapian::MSetIterator, 127
 - Xapian::PositionIterator, 138
 - Xapian::PostingIterator, 141
 - Xapian::Query, 147
 - Xapian::QueryParser, 152
 - Xapian::RSet, 160
 - Xapian::Stem, 168
 - Xapian::TermGenerator, 175
 - Xapian::TermIterator, 180
 - Xapian::ValueIterator, 194
 - Xapian::WritableDatabase, 204
- operator==
 - Xapian, 23
 - Xapian::ESetIterator, 104
 - Xapian::MSetIterator, 129
 - Xapian::PositionIterator, 138
 - Xapian::PostingIterator, 142
 - Xapian::Utf8Iterator, 191
 - Xapian::ValueIterator, 195
- operator[]
 - Xapian::ESet, 100
 - Xapian::MSet, 124
- parse_query
 - Xapian::QueryParser, 153
- percent
 - Xapian, 21
- pointer
 - Xapian::ESetIterator, 102
 - Xapian::MSet, 120
 - Xapian::MSetIterator, 127
 - Xapian::PostingIterator, 140
 - Xapian::TermIterator, 179
 - Xapian::Utf8Iterator, 188
 - Xapian::ValueIterator, 193
- PositionIterator
 - Xapian::PositionIterator, 138
- positionlist_begin
 - Xapian::Database, 53
 - Xapian::PostingIterator, 142
 - Xapian::TermIterator, 181
- positionlist_count
 - Xapian::TermIterator, 181
- positionlist_end
 - Xapian::Database, 53
 - Xapian::PostingIterator, 142
 - Xapian::TermIterator, 181
- PostingIterator
 - Xapian::PostingIterator, 141

- postlist_begin
 - Xapian::Database, 52
- postlist_end
 - Xapian::Database, 52
- Query
 - Xapian::Query, 145–147
- QueryParser
 - Xapian::QueryParser, 152
- QueryParserError
 - Xapian::QueryParserError, 157
- RangeError
 - Xapian::RangeError, 158
- raw
 - Xapian::Utf8Iterator, 190
- reference
 - Xapian::ESetIterator, 102
 - Xapian::MSet, 119
 - Xapian::MSetIterator, 127
 - Xapian::PostingIterator, 140
 - Xapian::TermIterator, 179
 - Xapian::Utf8Iterator, 188
 - Xapian::ValueIterator, 193
- register_match_decider
 - Xapian::Enquire, 92
- remove_document
 - Xapian::RSet, 161
- remove_posting
 - Xapian::Document, 79
- remove_spelling
 - Xapian::WritableDatabase, 209
- remove_synonym
 - Xapian::WritableDatabase, 209
- remove_term
 - Xapian::Document, 79
- remove_value
 - Xapian::Document, 77
- reopen
 - Xapian::Database, 52
- replace_document
 - Xapian::WritableDatabase, 207, 208
- revision
 - Xapian, 23
- RSet
 - Xapian::RSet, 160
- serialise
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 46
 - Xapian::TradWeight, 184
 - Xapian::Weight, 198
- set_collapse_key
 - Xapian::Enquire, 85
- set_cutoff
 - Xapian::Enquire, 86
- set_data
 - Xapian::Document, 78
- set_database
 - Xapian::QueryParser, 153
 - Xapian::TermGenerator, 175
- set_default_op
 - Xapian::QueryParser, 153
- set_docid_order
 - Xapian::Enquire, 86
- set_document
 - Xapian::TermGenerator, 175
- set_flags
 - Xapian::TermGenerator, 176
- set_metadata
 - Xapian::WritableDatabase, 210
- set_query
 - Xapian::Enquire, 84
- set_sort_by_key
 - Xapian::Enquire, 87
- set_sort_by_key_then_relevance
 - Xapian::Enquire, 88
- set_sort_by_relevance
 - Xapian::Enquire, 86
- set_sort_by_relevance_then_key
 - Xapian::Enquire, 88
- set_sort_by_relevance_then_value
 - Xapian::Enquire, 88
- set_sort_by_value
 - Xapian::Enquire, 87
- set_sort_by_value_then_relevance
 - Xapian::Enquire, 87
- set_stemmer
 - Xapian::QueryParser, 152
 - Xapian::TermGenerator, 175
- set_stemming_strategy
 - Xapian::QueryParser, 152
- set_stopper
 - Xapian::QueryParser, 153
 - Xapian::TermGenerator, 175
- set_termpos
 - Xapian::TermGenerator, 177
- set_weighting_scheme
 - Xapian::Enquire, 85
- SimpleStopper

- Xapian::SimpleStopper, 163
- size
 - Xapian::ESet, 99
 - Xapian::MSet, 123
 - Xapian::RSet, 160
- size_type
 - Xapian::MSet, 120
- skip_to
 - Xapian::PostingIterator, 141
 - Xapian::TermIterator, 180
- sortable_serialise
 - Xapian, 24
- sortable_unserialise
 - Xapian, 24
- spellings_begin
 - Xapian::Database, 55
- spellings_end
 - Xapian::Database, 55
- Stem
 - Xapian::Stem, 166, 167
- stoplist_begin
 - Xapian::QueryParser, 156
- StringValueRangeProcessor
 - Xapian::StringValueRangeProcessor, 171
- swap
 - Xapian::ESet, 100
 - Xapian::MSet, 123
- synonym_keys_begin
 - Xapian::Database, 56
- synonym_keys_end
 - Xapian::Database, 56
- synonyms_begin
 - Xapian::Database, 55
- synonyms_end
 - Xapian::Database, 55
- term_exists
 - Xapian::Database, 54
- termcount
 - Xapian, 21
- termcount_diff
 - Xapian, 21
- TermGenerator
 - Xapian::TermGenerator, 175
- TermIterator
 - Xapian::TermIterator, 180
- termlist_begin
 - Xapian::Database, 52
 - Xapian::Document, 80
- termlist_count
 - Xapian::Document, 79
- termlist_end
 - Xapian::Database, 52
 - Xapian::Document, 80
- termpos
 - Xapian, 21
- termpos_diff
 - Xapian, 21
- timeout
 - Xapian, 21
- to_utf8
 - Xapian::Unicode, 38
- tolower
 - Xapian::Unicode, 38
- toupper
 - Xapian::Unicode, 38
- TradWeight
 - Xapian::TradWeight, 183
- UnimplementedError
 - Xapian::UnimplementedError, 186
- unserialise
 - Xapian::BM25Weight, 43
 - Xapian::BoolWeight, 46
 - Xapian::TradWeight, 184
 - Xapian::Weight, 199
- unstem_begin
 - Xapian::QueryParser, 156
- use_exact_termfreq
 - Xapian::Enquire, 92
- Utf8Iterator
 - Xapian::Utf8Iterator, 189
- value_type
 - Xapian::ESetIterator, 102
 - Xapian::MSet, 119
 - Xapian::MSetIterator, 126
 - Xapian::PostingIterator, 140
 - Xapian::TermIterator, 179
 - Xapian::Utf8Iterator, 188
 - Xapian::ValueIterator, 193
- ValueIterator
 - Xapian::ValueIterator, 194
- valueno
 - Xapian, 21
- valueno_diff
 - Xapian, 22
- values_begin
 - Xapian::Document, 80

- values_count
 - Xapian::Document, 80
- values_end
 - Xapian::Document, 80
- version.h
 - XAPIAN_HAS_FLINT_-
BACKEND, 215
 - XAPIAN_HAS_INMEMORY_-
BACKEND, 215
 - XAPIAN_HAS_QUARTZ_-
BACKEND, 215
 - XAPIAN_HAS_REMOTE_-
BACKEND, 216
 - XAPIAN_MAJOR_VERSION, 216
 - XAPIAN_MINOR_VERSION, 216
 - XAPIAN_REVISION, 216
 - XAPIAN_VERSION, 216
- version_string
 - Xapian, 24
- weight
 - Xapian, 22
- WritableDatabase
 - Xapian::WritableDatabase, 203
- WritableDatabaseopen
 - Xapian::Quartz, 31
- Xapian, 13
 - BAD_VALUENO, 25
 - DB_CREATE, 25
 - DB_CREATE_OR_OPEN, 25
 - DB_CREATE_OR_OVERWRITE,
25
 - DB_OPEN, 25
 - doccount, 20
 - doccount_diff, 20
 - docid, 20
 - doclength, 21
 - major_version, 22
 - minor_version, 22
 - operator!=, 22, 23
 - operator==, 23
 - percent, 21
 - revision, 23
 - sortable_serialise, 24
 - sortable_unserialise, 24
 - termcount, 21
 - termcount_diff, 21
 - termpos, 21
 - termpos_diff, 21
 - timeout, 21
 - valueno, 21
 - valueno_diff, 22
 - version_string, 24
 - weight, 22
 - xapian_major_version, 24
 - xapian_minor_version, 25
 - xapian_revision, 25
 - xapian_version_string, 25
- xapian.h, 217
- xapian/database.h, 218
- xapian/dbfactory.h, 219
- xapian/document.h, 221
- xapian/enquire.h, 222
- xapian/error.h, 213
- xapian/errorhandler.h, 224
- xapian/expanddecider.h, 225
- xapian/positioniterator.h, 226
- xapian/postingiterator.h, 227
- xapian/query.h, 228
- xapian/queryparser.h, 229
- xapian/sorter.h, 230
- xapian/stem.h, 231
- xapian/termgenerator.h, 232
- xapian/termiterator.h, 233
- xapian/types.h, 234
- xapian/unicode.h, 236
- xapian/valueiterator.h, 238
- xapian/version.h, 215
- Xapian::AssertionError, 39
 - AssertionError, 40
- Xapian::Auto, 27
 - open_stub, 27
- Xapian::BM25Weight, 41
 - BM25Weight, 42
 - clone, 42
 - get_maxextra, 44
 - get_maxpart, 43
 - get_sumextra, 43
 - get_sumpart, 43
 - get_sumpart_needs_doclength, 44
 - name, 43
 - serialise, 43
 - unserialise, 43
- Xapian::BoolWeight, 45
 - clone, 46
 - get_maxextra, 47
 - get_maxpart, 46
 - get_sumextra, 47
 - get_sumpart, 46

- get_sumpart_needs_doclength, 47
- name, 46
- serialise, 46
- unserialise, 46
- Xapian::Database, 48
 - ~Database, 51
 - add_database, 51
 - allterms_begin, 53
 - allterms_end, 53
 - Database, 51
 - get_avlength, 54
 - get_collection_freq, 54
 - get_description, 52
 - get_doccount, 53
 - get_doclength, 54
 - get_document, 54
 - get_lastdocid, 53
 - get_metadata, 56
 - get_spelling_suggestion, 55
 - get_termfreq, 54
 - has_positions, 52
 - keep_alive, 54
 - metadata_keys_begin, 56
 - metadata_keys_end, 57
 - operator=, 51
 - positionlist_begin, 53
 - positionlist_end, 53
 - postlist_begin, 52
 - postlist_end, 52
 - reopen, 52
 - spellings_begin, 55
 - spellings_end, 55
 - synonym_keys_begin, 56
 - synonym_keys_end, 56
 - synonyms_begin, 55
 - synonyms_end, 55
 - term_exists, 54
 - termlist_begin, 52
 - termlist_end, 52
- Xapian::DatabaseCorruptError, 58
 - DatabaseCorruptError, 58
- Xapian::DatabaseCreateError, 60
 - DatabaseCreateError, 60
- Xapian::DatabaseError, 62
 - DatabaseError, 62
- Xapian::DatabaseLockError, 64
 - DatabaseLockError, 64
- Xapian::DatabaseModifiedError, 66
 - DatabaseModifiedError, 66
- Xapian::DatabaseOpeningError, 68
 - DatabaseOpeningError, 68
- Xapian::DatabaseVersionError, 70
 - DatabaseVersionError, 71
- Xapian::DateValueRangeProcessor, 72
 - DateValueRangeProcessor, 72
 - operator(), 73
- Xapian::DocNotFoundError, 74
 - DocNotFoundError, 74
- Xapian::Document, 75
 - ~Document, 77
 - add_boolean_term, 78
 - add_posting, 78
 - add_term, 78
 - add_value, 77
 - clear_terms, 79
 - clear_values, 77
 - Document, 77
 - get_data, 78
 - get_description, 80
 - get_docid, 80
 - get_value, 77
 - operator=, 77
 - remove_posting, 79
 - remove_term, 79
 - remove_value, 77
 - set_data, 78
 - termlist_begin, 80
 - termlist_count, 79
 - termlist_end, 80
 - values_begin, 80
 - values_count, 80
 - values_end, 80
- Xapian::Enquire, 81
 - ~Enquire, 84
 - Enquire, 84
 - get_description, 92
 - get_eset, 90
 - get_matching_terms_begin, 91
 - get_matching_terms_end, 91, 92
 - get_mset, 89
 - get_query, 85
 - include_query_terms, 92
 - operator=, 84
 - register_match_decider, 92
 - set_collapse_key, 85
 - set_cutoff, 86
 - set_docid_order, 86
 - set_query, 84
 - set_sort_by_key, 87
 - set_sort_by_key_then_relevance, 88

- set_sort_by_relevance, 86
- set_sort_by_relevance_then_key, 88
- set_sort_by_relevance_then_value, 88
- set_sort_by_value, 87
- set_sort_by_value_then_relevance, 87
- set_weighting_scheme, 85
- use_exact_termfreq, 92
- Xapian::Error, 94
 - get_context, 95
 - get_description, 95
 - get_errno, 95
 - get_error_string, 95
 - get_msg, 94
 - get_type, 94
- Xapian::ErrorHandler, 96
 - ~ErrorHandler, 96
 - ErrorHandler, 96
 - operator(), 96
- Xapian::ESet, 98
 - ~ESet, 99
 - back, 100
 - begin, 100
 - empty, 100
 - end, 100
 - ESet, 99
 - get_description, 100
 - get_ebound, 99
 - max_size, 99
 - operator=, 99
 - operator[], 100
 - size, 99
 - swap, 100
- Xapian::ESetIterator, 101
 - difference_type, 102
 - ESetIterator, 103
 - get_description, 103
 - get_weight, 103
 - iterator_category, 102
 - operator *, 103
 - operator!=, 104
 - operator++, 103
 - operator-, 103
 - operator=, 103
 - operator==, 104
 - pointer, 102
 - reference, 102
 - value_type, 102
- Xapian::ExpandDecider, 105
 - ~ExpandDecider, 105
 - operator(), 105
- Xapian::ExpandDeciderAnd, 106
 - ExpandDeciderAnd, 106
 - operator(), 107
- Xapian::ExpandDeciderFilterTerms, 108
 - ExpandDeciderFilterTerms, 108
 - operator(), 108
- Xapian::FeatureUnavailableError, 110
 - FeatureUnavailableError, 110
- Xapian::Flint, 28
 - open, 28
- Xapian::InMemory, 30
 - open, 30
- Xapian::InternalError, 112
 - InternalError, 112
- Xapian::InvalidArgumentError, 113
 - InvalidArgumentError, 113
- Xapian::InvalidOperationError, 114
 - InvalidOperationError, 114
- Xapian::LogicError, 115
- Xapian::MatchDecider, 116
 - ~MatchDecider, 116
 - operator(), 116
- Xapian::MSet, 117
 - ~MSet, 120
 - back, 123
 - begin, 123
 - const_iterator, 119
 - const_reference, 120
 - convert_to_percent, 121
 - difference_type, 120
 - empty, 123
 - end, 123
 - fetch, 120, 121
 - get_description, 124
 - get_firstitem, 122
 - get_matches_estimated, 122
 - get_matches_lower_bound, 122
 - get_matches_upper_bound, 122
 - get_max_attained, 123
 - get_max_possible, 123
 - get_termfreq, 121
 - get_termweight, 122
 - iterator, 119
 - max_size, 123
 - MSet, 120
 - operator=, 120
 - operator[], 124
 - pointer, 120

- reference, 119
- size, 123
- size_type, 120
- swap, 123
- value_type, 119
- Xapian::MSetIterator, 125
 - difference_type, 127
 - get_collapse_count, 128
 - get_collapse_key, 128
 - get_description, 129
 - get_document, 128
 - get_percent, 129
 - get_rank, 128
 - get_weight, 128
 - iterator_category, 126
 - MSetIterator, 127
 - operator *, 128
 - operator!=, 129
 - operator++, 127
 - operator-, 127, 128
 - operator=, 127
 - operator==, 129
 - pointer, 127
 - reference, 127
 - value_type, 126
- Xapian::MultiValueSorter, 130
 - operator(), 130
- Xapian::NetworkError, 131
 - NetworkError, 131
- Xapian::NetworkTimeoutError, 133
 - NetworkTimeoutError, 133
- Xapian::NumberValueRangeProcessor, 135
 - NumberValueRangeProcessor, 135
 - operator(), 136
- Xapian::PositionIterator, 137
 - ~PositionIterator, 138
 - get_description, 138
 - operator=, 138
 - operator==, 138
 - PositionIterator, 138
- Xapian::PostingIterator, 139
 - ~PostingIterator, 141
 - difference_type, 140
 - get_description, 142
 - get_doclength, 141
 - get_wdf, 141
 - iterator_category, 140
 - operator *, 141
 - operator=, 141
 - operator==, 142
 - pointer, 140
 - positionlist_begin, 142
 - positionlist_end, 142
 - PostingIterator, 141
 - reference, 140
 - skip_to, 141
 - value_type, 140
- Xapian::Quartz, 31
 - open, 31
 - WritableDatabaseopen, 31
- Xapian::Query, 143
 - ~Query, 146
 - empty, 148
 - get_description, 148
 - get_length, 147
 - get_terms_begin, 148
 - get_terms_end, 148
 - MatchAll, 148
 - MatchNothing, 148
 - op, 145
 - OP_AND, 145
 - OP_AND_MAYBE, 145
 - OP_AND_NOT, 145
 - OP_ELITE_SET, 145
 - OP_FILTER, 145
 - OP_NEAR, 145
 - OP_OR, 145
 - OP_PHRASE, 145
 - OP_SCALE_WEIGHT, 145
 - OP_VALUE_GE, 145
 - OP_VALUE_LE, 145
 - OP_VALUE_RANGE, 145
 - OP_XOR, 145
 - operator=, 147
 - Query, 145–147
- Xapian::QueryParser, 149
 - ~QueryParser, 152
 - add_boolean_prefix, 155
 - add_prefix, 154
 - add_valuerangeprocessor, 156
 - feature_flag, 150
 - FLAG_AUTO_MULTIWORD_-SYNONYMS, 151
 - FLAG_AUTO_SYNONYMS, 151
 - FLAG_BOOLEAN, 151
 - FLAG_BOOLEAN_ANY_CASE, 151
 - FLAG_DEFAULT, 151
 - FLAG_LOVEHATE, 151

- FLAG_PARTIAL, 151
- FLAG_PHRASE, 151
- FLAG_PURE_NOT, 151
- FLAG_SPELLING_ -
 - CORRECTION, 151
- FLAG_SYNONYM, 151
- FLAG_WILDCARD, 151
- get_corrected_query_string, 156
- get_default_op, 153
- get_description, 156
- operator=, 152
- parse_query, 153
- QueryParser, 152
- set_database, 153
- set_default_op, 153
- set_stemmer, 152
- set_stemming_strategy, 152
- set_stopper, 153
- stoplist_begin, 156
- unstem_begin, 156
- Xapian::QueryParserError, 157
 - QueryParserError, 157
- Xapian::RangeError, 158
 - RangeError, 158
- Xapian::Remote, 33
 - open, 33, 34
 - open_writable, 34
- Xapian::RSet, 159
 - ~RSet, 160
 - add_document, 160
 - contains, 161
 - empty, 160
 - get_description, 161
 - operator=, 160
 - remove_document, 161
 - RSet, 160
 - size, 160
- Xapian::RuntimeError, 162
- Xapian::SimpleStopper, 163
 - ~SimpleStopper, 164
 - add, 164
 - get_description, 164
 - operator(), 164
 - SimpleStopper, 163
- Xapian::Sorter, 165
 - ~Sorter, 165
 - operator(), 165
- Xapian::Stem, 166
 - ~Stem, 167
 - get_available_languages, 168
 - get_description, 168
 - operator(), 168
 - operator=, 168
 - Stem, 166, 167
- Xapian::Stopper, 169
 - ~Stopper, 169
 - get_description, 169
 - operator(), 169
- Xapian::StringValueRangeProcessor, 171
 - operator(), 171
 - StringValueRangeProcessor, 171
- Xapian::TermGenerator, 173
 - ~TermGenerator, 175
 - FLAG_SPELLING, 174
 - flags, 174
 - get_description, 177
 - get_document, 175
 - get_termpos, 177
 - increase_termpos, 177
 - index_text, 176
 - index_text_without_positions, 176, 177
 - operator=, 175
 - set_database, 175
 - set_document, 175
 - set_flags, 176
 - set_stemmer, 175
 - set_stopper, 175
 - set_termpos, 177
 - TermGenerator, 175
- Xapian::TermIterator, 178
 - ~TermIterator, 180
 - difference_type, 179
 - get_description, 181
 - get_termfreq, 180
 - get_wdf, 180
 - iterator_category, 179
 - operator *, 180
 - operator=, 180
 - pointer, 179
 - positionlist_begin, 181
 - positionlist_count, 181
 - positionlist_end, 181
 - reference, 179
 - skip_to, 180
 - TermIterator, 180
 - value_type, 179
- Xapian::TradWeight, 182
 - clone, 183
 - get_maxextra, 185

- get_maxpart, 184
- get_sumextra, 184
- get_sumpart, 184
- get_sumpart_needs_doclength, 185
- name, 183
- serialise, 184
- TradWeight, 183
- unserialise, 184
- Xapian::Unicode, 36
 - append_utf8, 37
 - category, 37
 - get_category, 37
 - is_currency, 37
 - is_whitespace, 37
 - is_wordchar, 38
 - nonascii_to_utf8, 38
 - to_utf8, 38
 - tolower, 38
 - toupper, 38
- Xapian::UnimplementedError, 186
 - UnimplementedError, 186
- Xapian::Utf8Iterator, 187
 - assign, 190
 - difference_type, 188
 - iterator_category, 188
 - left, 190
 - operator *, 190
 - operator !=, 191
 - operator ++, 190
 - operator ==, 191
 - pointer, 188
 - raw, 190
 - reference, 188
 - Utf8Iterator, 189
 - value_type, 188
- Xapian::ValueIterator, 192
 - difference_type, 193
 - get_description, 194
 - get_valueno, 194
 - iterator_category, 193
 - operator *, 194
 - operator !=, 195
 - operator ++, 194
 - operator ->, 194
 - operator =, 194
 - operator ==, 195
 - pointer, 193
 - reference, 193
 - value_type, 193
 - ValueIterator, 194
- Xapian::ValueRangeProcessor, 196
 - ~ValueRangeProcessor, 196
 - operator(), 196
- Xapian::Weight, 197
 - create, 198
 - get_maxextra, 200
 - get_maxpart, 199
 - get_sumextra, 199
 - get_sumpart, 199
 - get_sumpart_needs_doclength, 200
 - name, 198
 - serialise, 198
 - unserialise, 199
- Xapian::WritableDatabase, 201
 - ~WritableDatabase, 203
 - add_document, 206
 - add_spelling, 209
 - add_synonym, 209
 - begin_transaction, 204
 - cancel_transaction, 205
 - clear_synonyms, 210
 - commit_transaction, 205
 - delete_document, 206, 207
 - flush, 204
 - get_description, 211
 - operator=, 204
 - remove_spelling, 209
 - remove_synonym, 209
 - replace_document, 207, 208
 - set_metadata, 210
 - WritableDatabase, 203
- XAPIAN_HAS_FLINT_BACKEND
 - version.h, 215
- XAPIAN_HAS_INMEMORY_BACKEND
 - version.h, 215
- XAPIAN_HAS_QUARTZ_BACKEND
 - version.h, 215
- XAPIAN_HAS_REMOTE_BACKEND
 - version.h, 216
- XAPIAN_MAJOR_VERSION
 - version.h, 216
- xapian_major_version
 - Xapian, 24
- XAPIAN_MINOR_VERSION
 - version.h, 216
- xapian_minor_version
 - Xapian, 25
- XAPIAN_REVISION
 - version.h, 216

xapian_revision
 Xapian, [25](#)
XAPIAN_VERSION
 version.h, [216](#)
xapian_version_string
 Xapian, [25](#)